

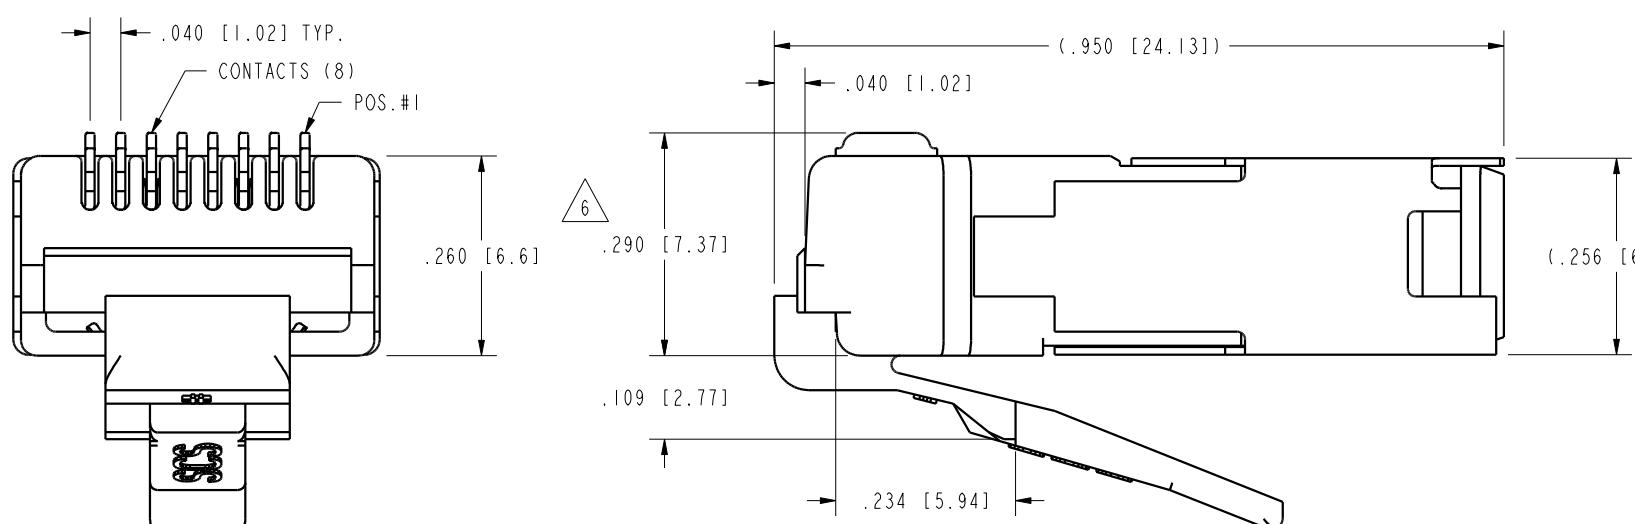
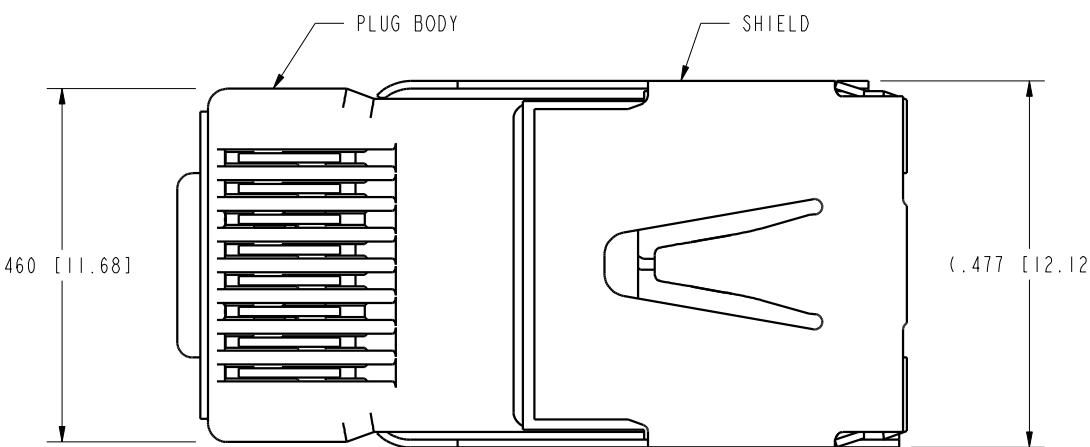
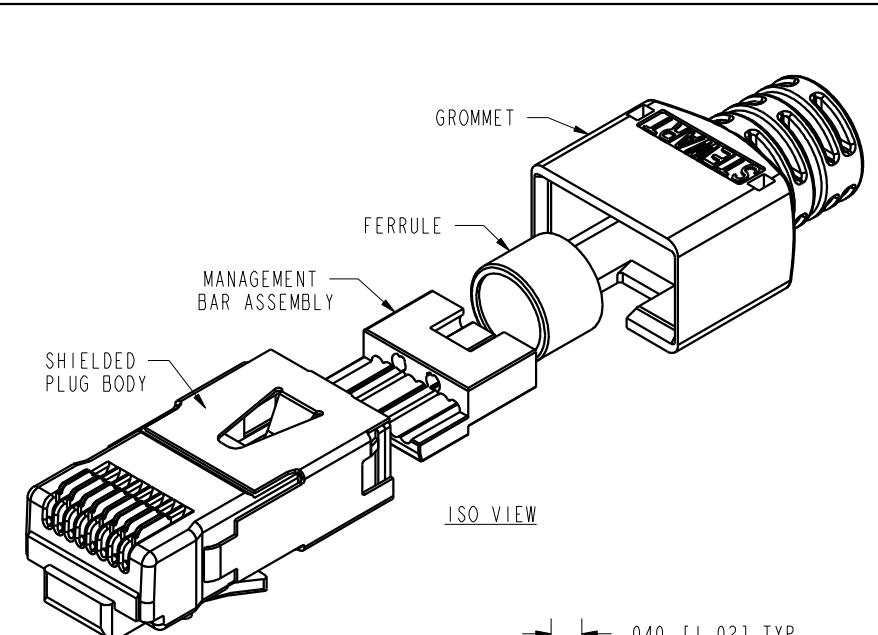
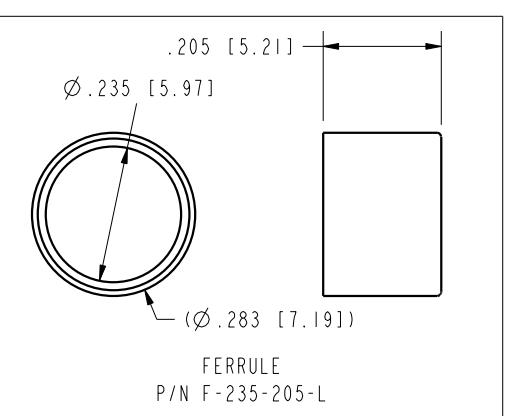


DATE	REV.	ECN	APP'D BY
2-17-15	A5	10258	ADB
2-19-16	A6	10554	TRM

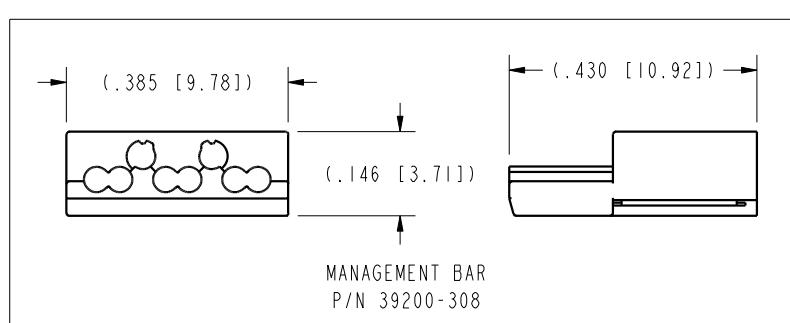


NOTES:

1. PLUG KIT CONSISTS OF:
PRE-INSERTED PLUG BODY & SHIELD
MANAGEMENT BAR ASSEMBLY
FERRULE
GROMMET
2. MATERIALS:
PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0
MANAGEMENT BAR: CLEAR POLYCARBONATE, UL 94-V0
CHANNEL COMPENSATOR: NICKEL PLATED BRASS
SHIELD: TIN PLATED BRASS
CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING
FERRULE: NICKEL OR TIN PLATED BRASS
GROMMET: POLYCARBONATE, UL 94-V0, COLOR:BLACK
3. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS UP TO .037 [0.94] OUTSIDE DIAMETER OF INSULATION.
4. FOR PRODUCT SPECIFICATION SEE PR026-01.
5. DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
6. TERMINATED PLUG HEIGHT: .237 [6.02] \pm .005 [0.13] ON CABLE.
7. DESIGNED FOR CATEGORY 6 APPLICATIONS.

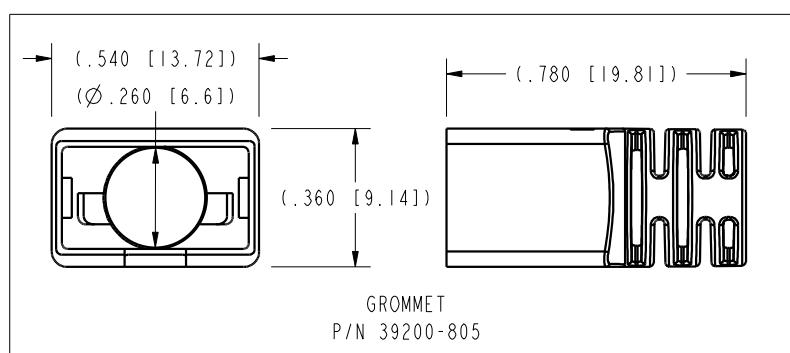

BULK	50 MICRO-INCHES [1.27um]	SS-39200-006
PACKAGE	CONTACT PLATING IN MATING AREA	PART NUMBER

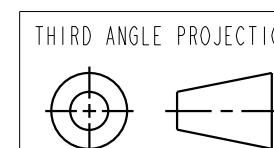


DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO
CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE $\pm .005$ [0.13]
ANGLES ARE $\pm 1^\circ$

SHEET NO.
1 OF 1



stewart
CONNECTOR
a bel group

1118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512
<http://www.stewartconnector.com>

8 x 8 CATEGORY 6 SHIELDED PLUG ASSEMBLY
WITH MANAGEMENT BAR, FERRULE & GROMMET

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON
ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF
STEWART CONNECTOR AND SHALL NOT BE REPRODUCED,
COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN
CONSENT OF STEWART CONNECTOR. ONE OR MORE U.S. PATENTS
MAY APPLY TO THIS PRODUCT. FOR DETAILS, PLEASE
VISIT: [HTTP://BELFUSE.COM/STEWART/STEWART_PATENTS/](http://BELFUSE.COM/STEWART/STEWART_PATENTS/)

DRN BY: JAM DATE 5-21-01

APPD BY: TRM DATE 5-22-01

DWG. NO. CT390009 REV. A6

