

Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

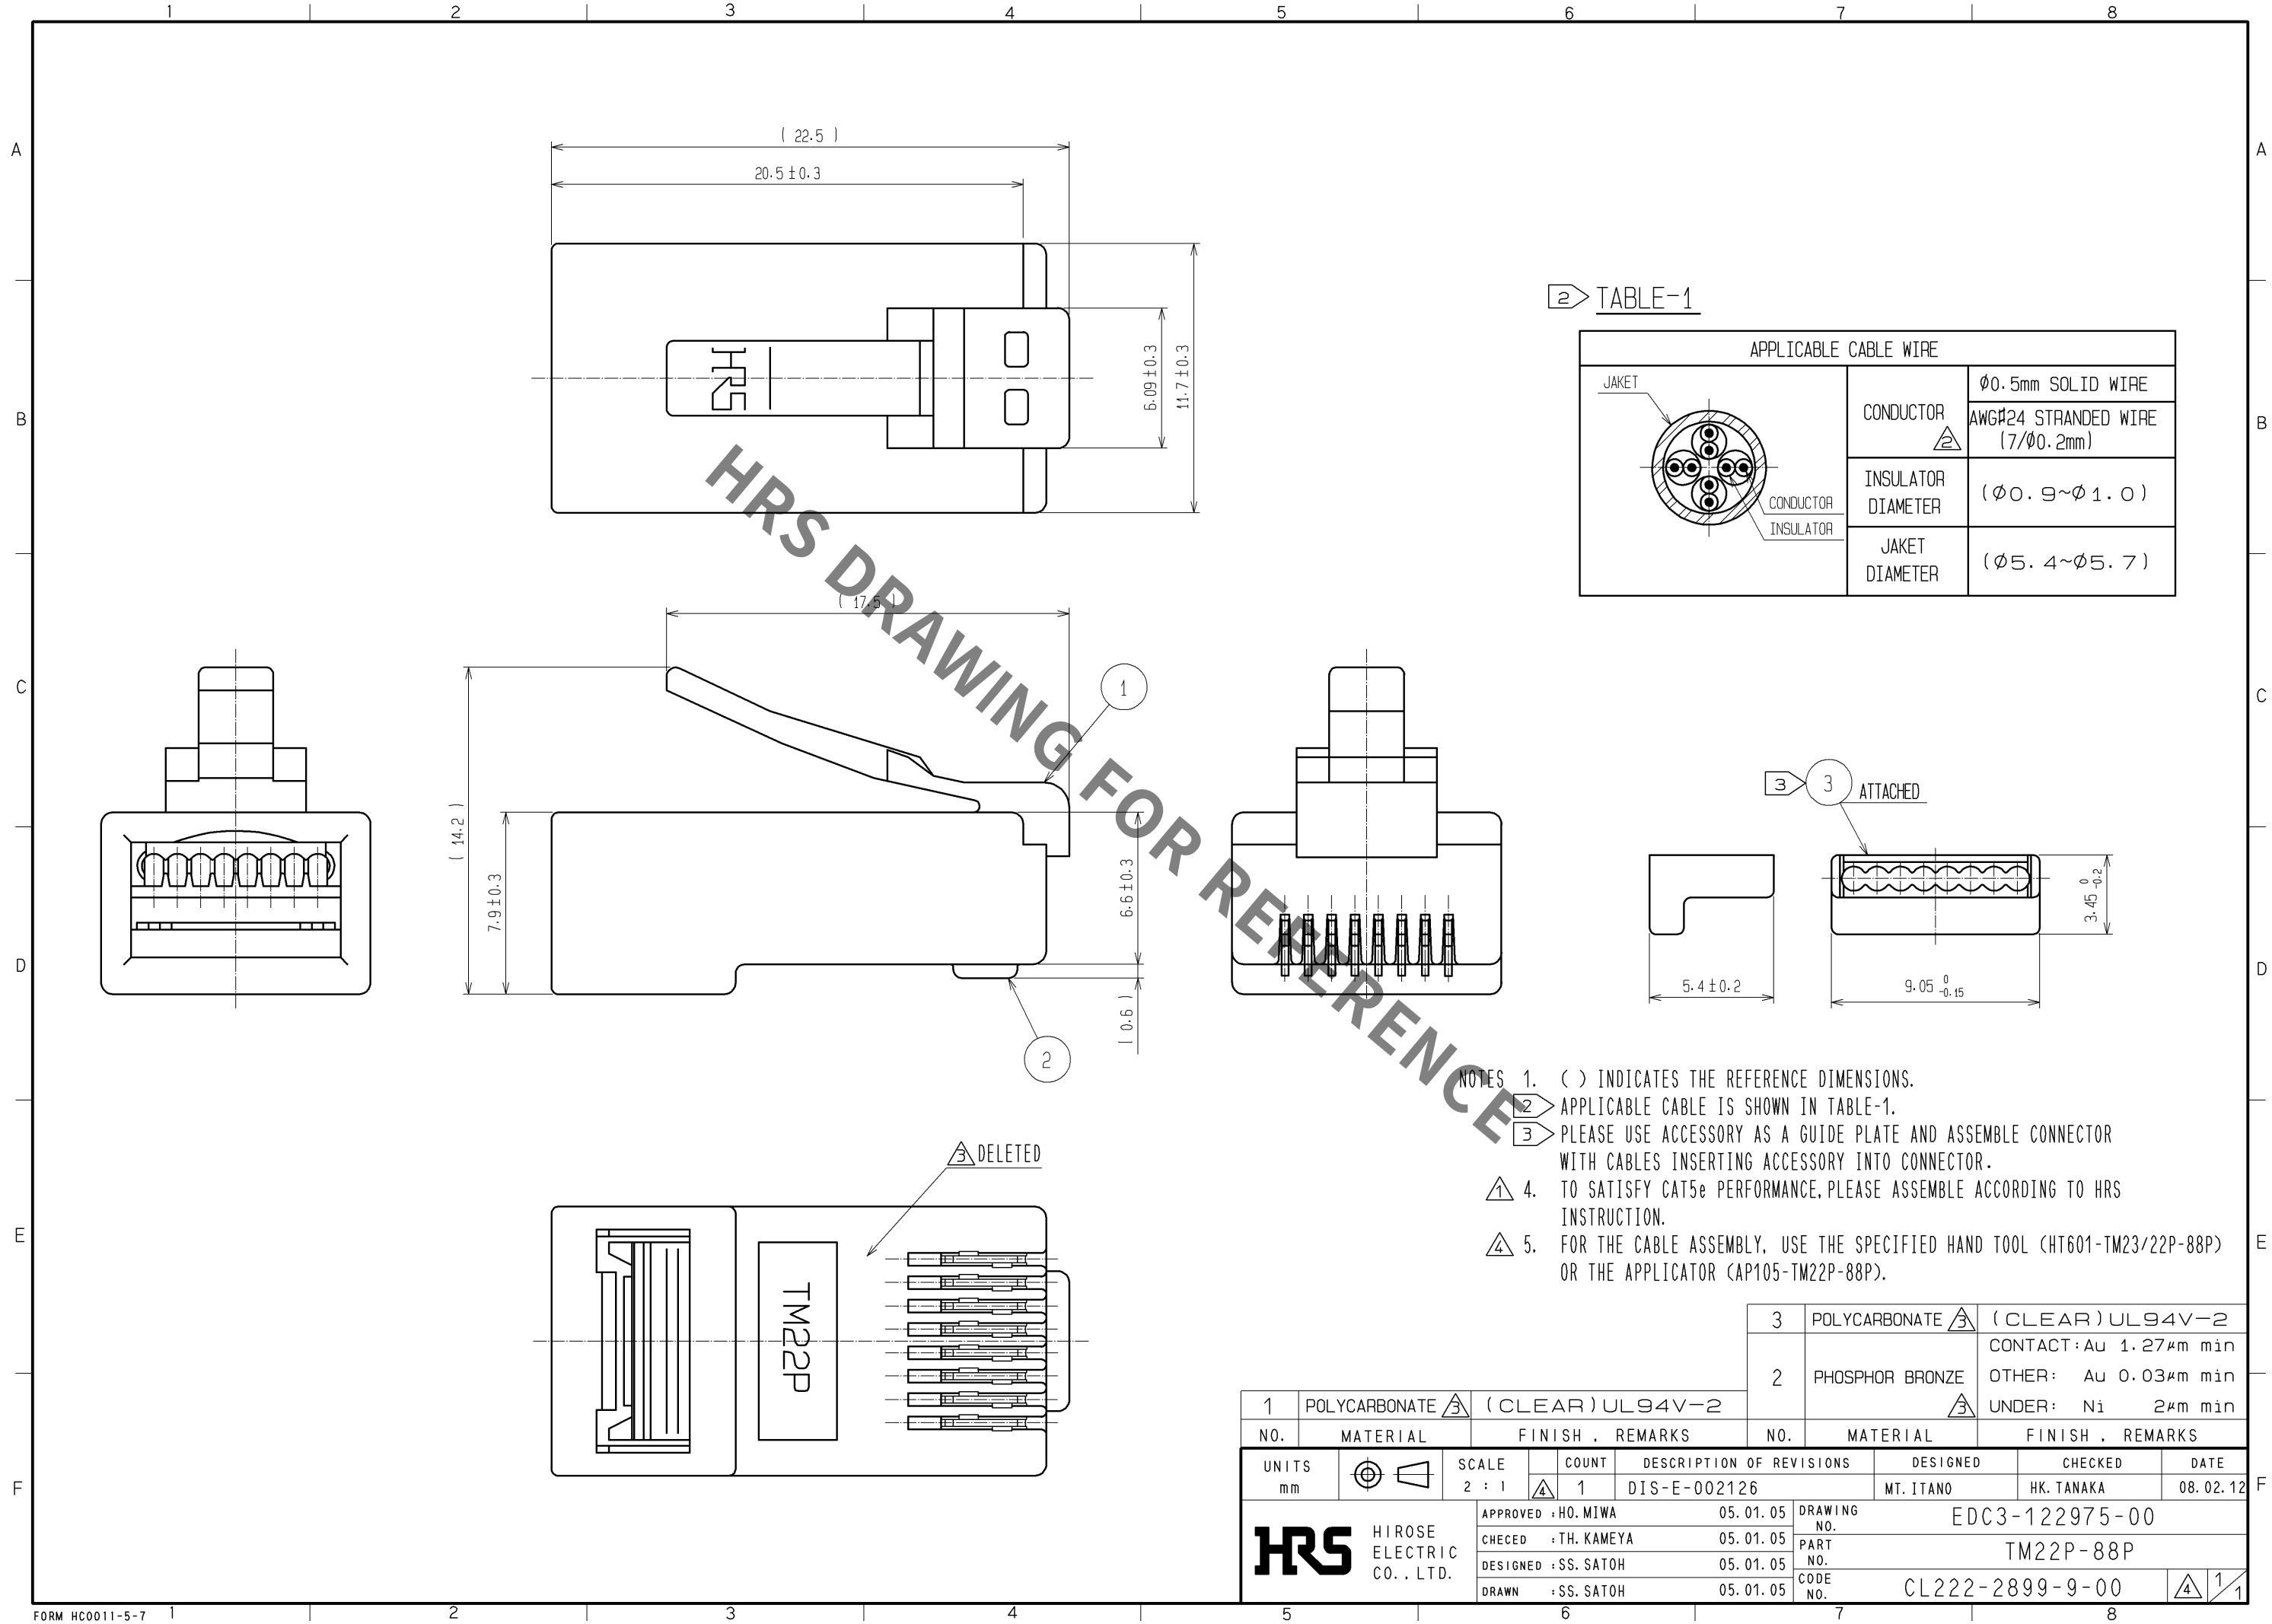


TABLE-1

APPLICABLE CABLE WIRE		
	CONDUCTOR	φ0.5mm SOLID WIRE
		AWG#24 STRANDED WIRE (7/φ0.2mm)
	INSULATOR DIAMETER	(φ0.9~φ1.0)
	JAKET DIAMETER	(φ5.4~φ5.7)

- NOTES
- () INDICATES THE REFERENCE DIMENSIONS.
 - APPLICABLE CABLE IS SHOWN IN TABLE-1.
 - PLEASE USE ACCESSORY AS A GUIDE PLATE AND ASSEMBLE CONNECTOR WITH CABLES INSERTING ACCESSORY INTO CONNECTOR.
 - TO SATISFY CAT5e PERFORMANCE, PLEASE ASSEMBLE ACCORDING TO HRS INSTRUCTION.
 - FOR THE CABLE ASSEMBLY, USE THE SPECIFIED HAND TOOL (HT601-TM23/22P-88P) OR THE APPLICATOR (AP105-TM22P-88P).

1	POLYCARBONATE	(CLEAR) UL94V-2	3	POLYCARBONATE	(CLEAR) UL94V-2
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
			2	PHOSPHOR BRONZE	CONTACT: Au 1.27μm min OTHER: Au 0.03μm min UNDER: Ni 2μm min
UNITS mm		SCALE 2 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-002126	DESIGNED MT. ITANO
		APPROVED : HO. MIWA		DRAWING NO. EDC3-122975-00	
		CHECKED : TH. KAMEYA		PART NO. TM22P-88P	
		DESIGNED : SS. SATOH		CODE NO. CL222-2899-9-00	
		DRAWN : SS. SATOH			