


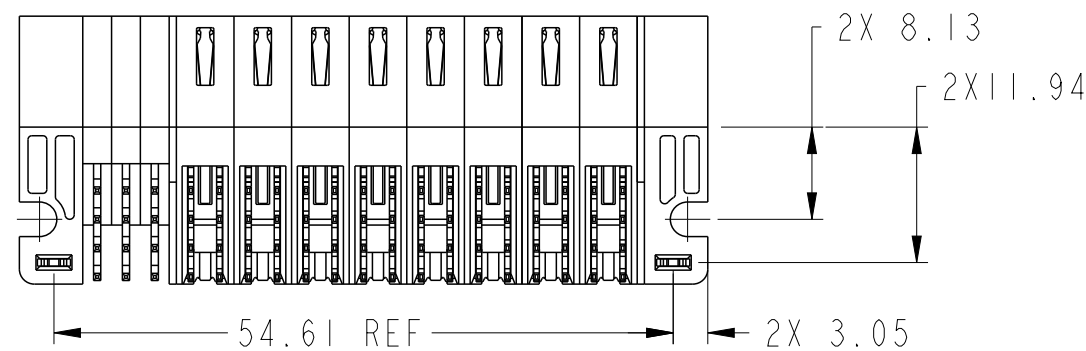


PRODUCT NUMBER SEE SHEET 2

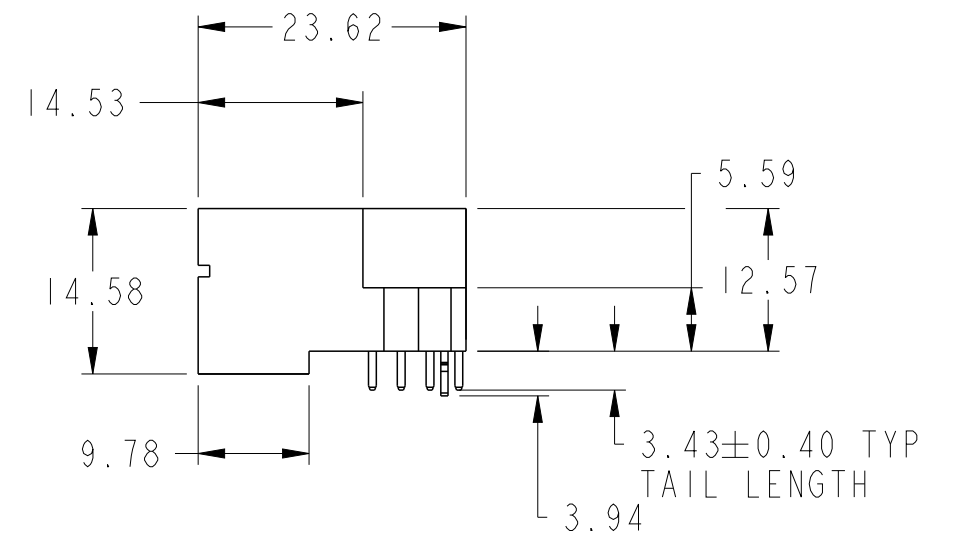


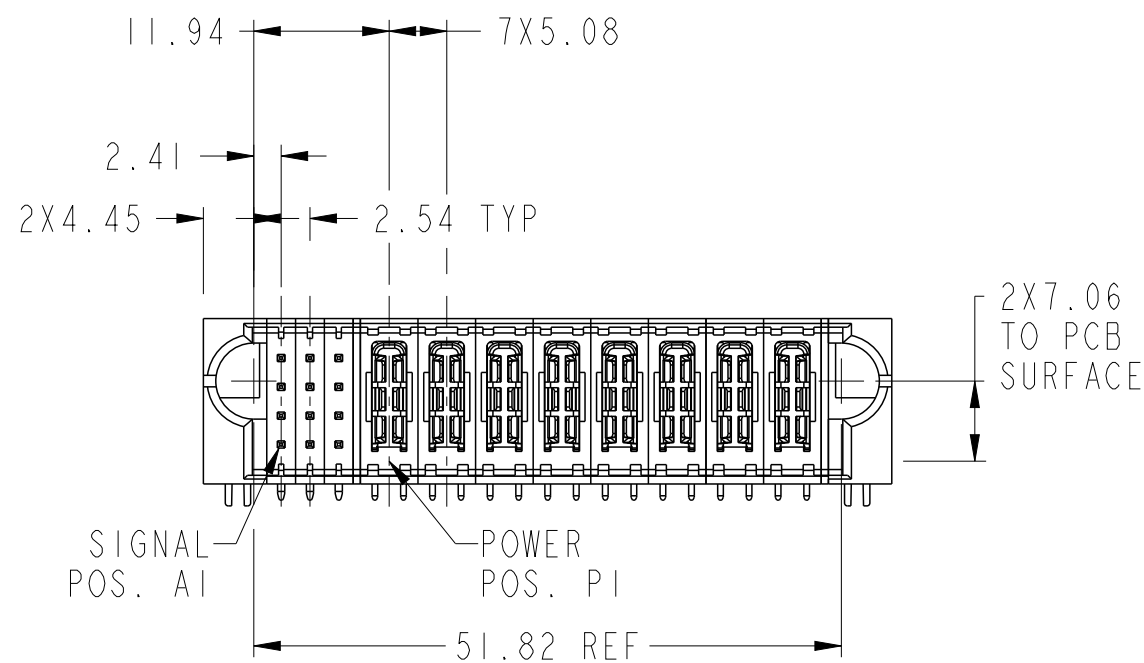

spec ref *				dr Peng-Bing Fu		2013/04/03		projection		MM		size A3		scale 3:2					
tolerance std				eng Peng-Bing Fu		2013/04/24						ecn no -							
ASME Y14.5				chr -		-													
				appr Pei-Ming Zheng		2013/04/24		product family PwrBlade+				rel level Released							
surface				linear		0.X		±0.5				title 12S+8HDP RA STB HEADER		dwg no 10106132-8003003		rev A			
						0.XX		±0.25											
						0.XXX		±0.10											
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw				sheet 1 of 3	

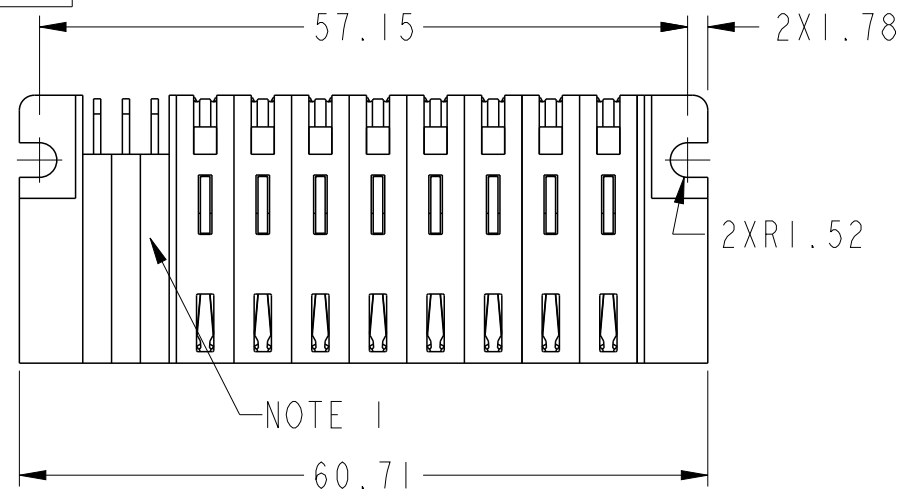








Copyright FCI.

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

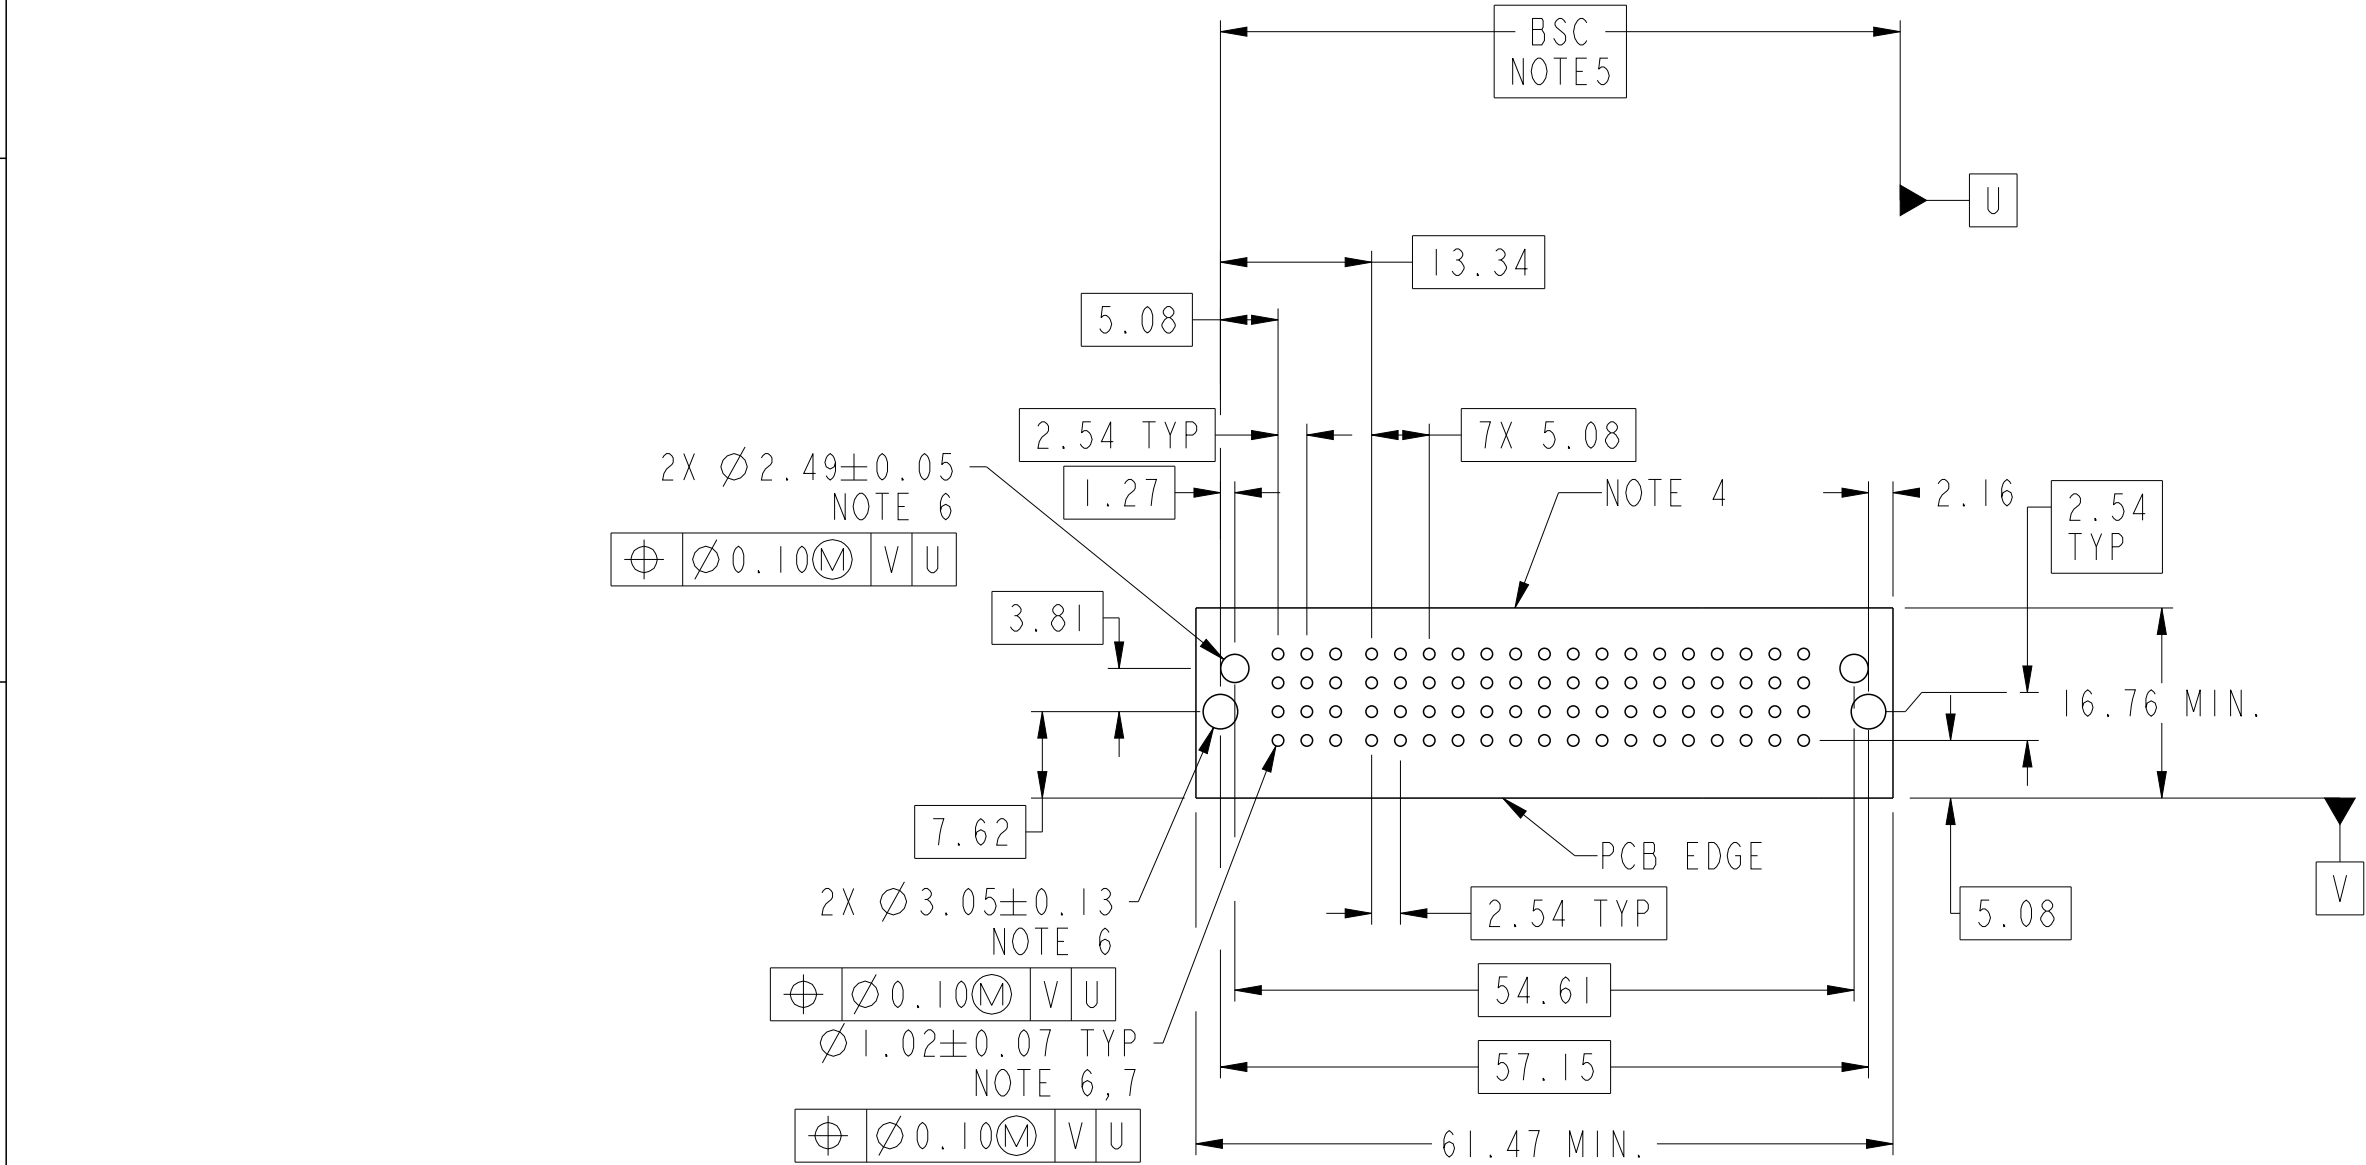dr	Peng-Bing Fu	2013/04/03	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2	
eng	Peng-Bing Fu	2013/04/23			ecn no	-			
chr	-	-			rel level	Released			
appr	Pei-Ming Zheng	2013/04/24	product family		PwrBlade+				
	title 12S+8HDP RA STB HEADER				dwg no	10106132-8003003		rev A	
www.fci.com	cat. no.		Product - Customer Drw				sheet 2 of 3		

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
HA	METAL HOLD DOWN
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)



PRODUCT NO.	ROW S	SIGNAL			HIGH POWER									
		E1	1	2	3	P1	P2	P3	P4	P5	P6	P7	P8	E2
10106132-8003003LF	D C B A		U	U	U	H1	H1	H1	H1	H1	H1	H1	H1	
			T	T	T									
			S	S	S									
			R	R	R									

A

B

C

D

A

B

C

D

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15±0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02±0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Peng-Bing Fu	2013/04/03	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	scale
eng	Peng-Bing Fu	2013/04/24			A3	3:2
chr	-	-			ecn no	-
appr	Pei-Ming Zheng	2013/04/24	product family	PwrBlade+	rel level	Released
<div>www.fci.com</div>		cat. no.	Product - Customer Drw			sheet 3 of 3
<div>FCI</div>		title	12S+8HDP RA STB HEADER			rev
		dwg no	10106132-8003003			A