

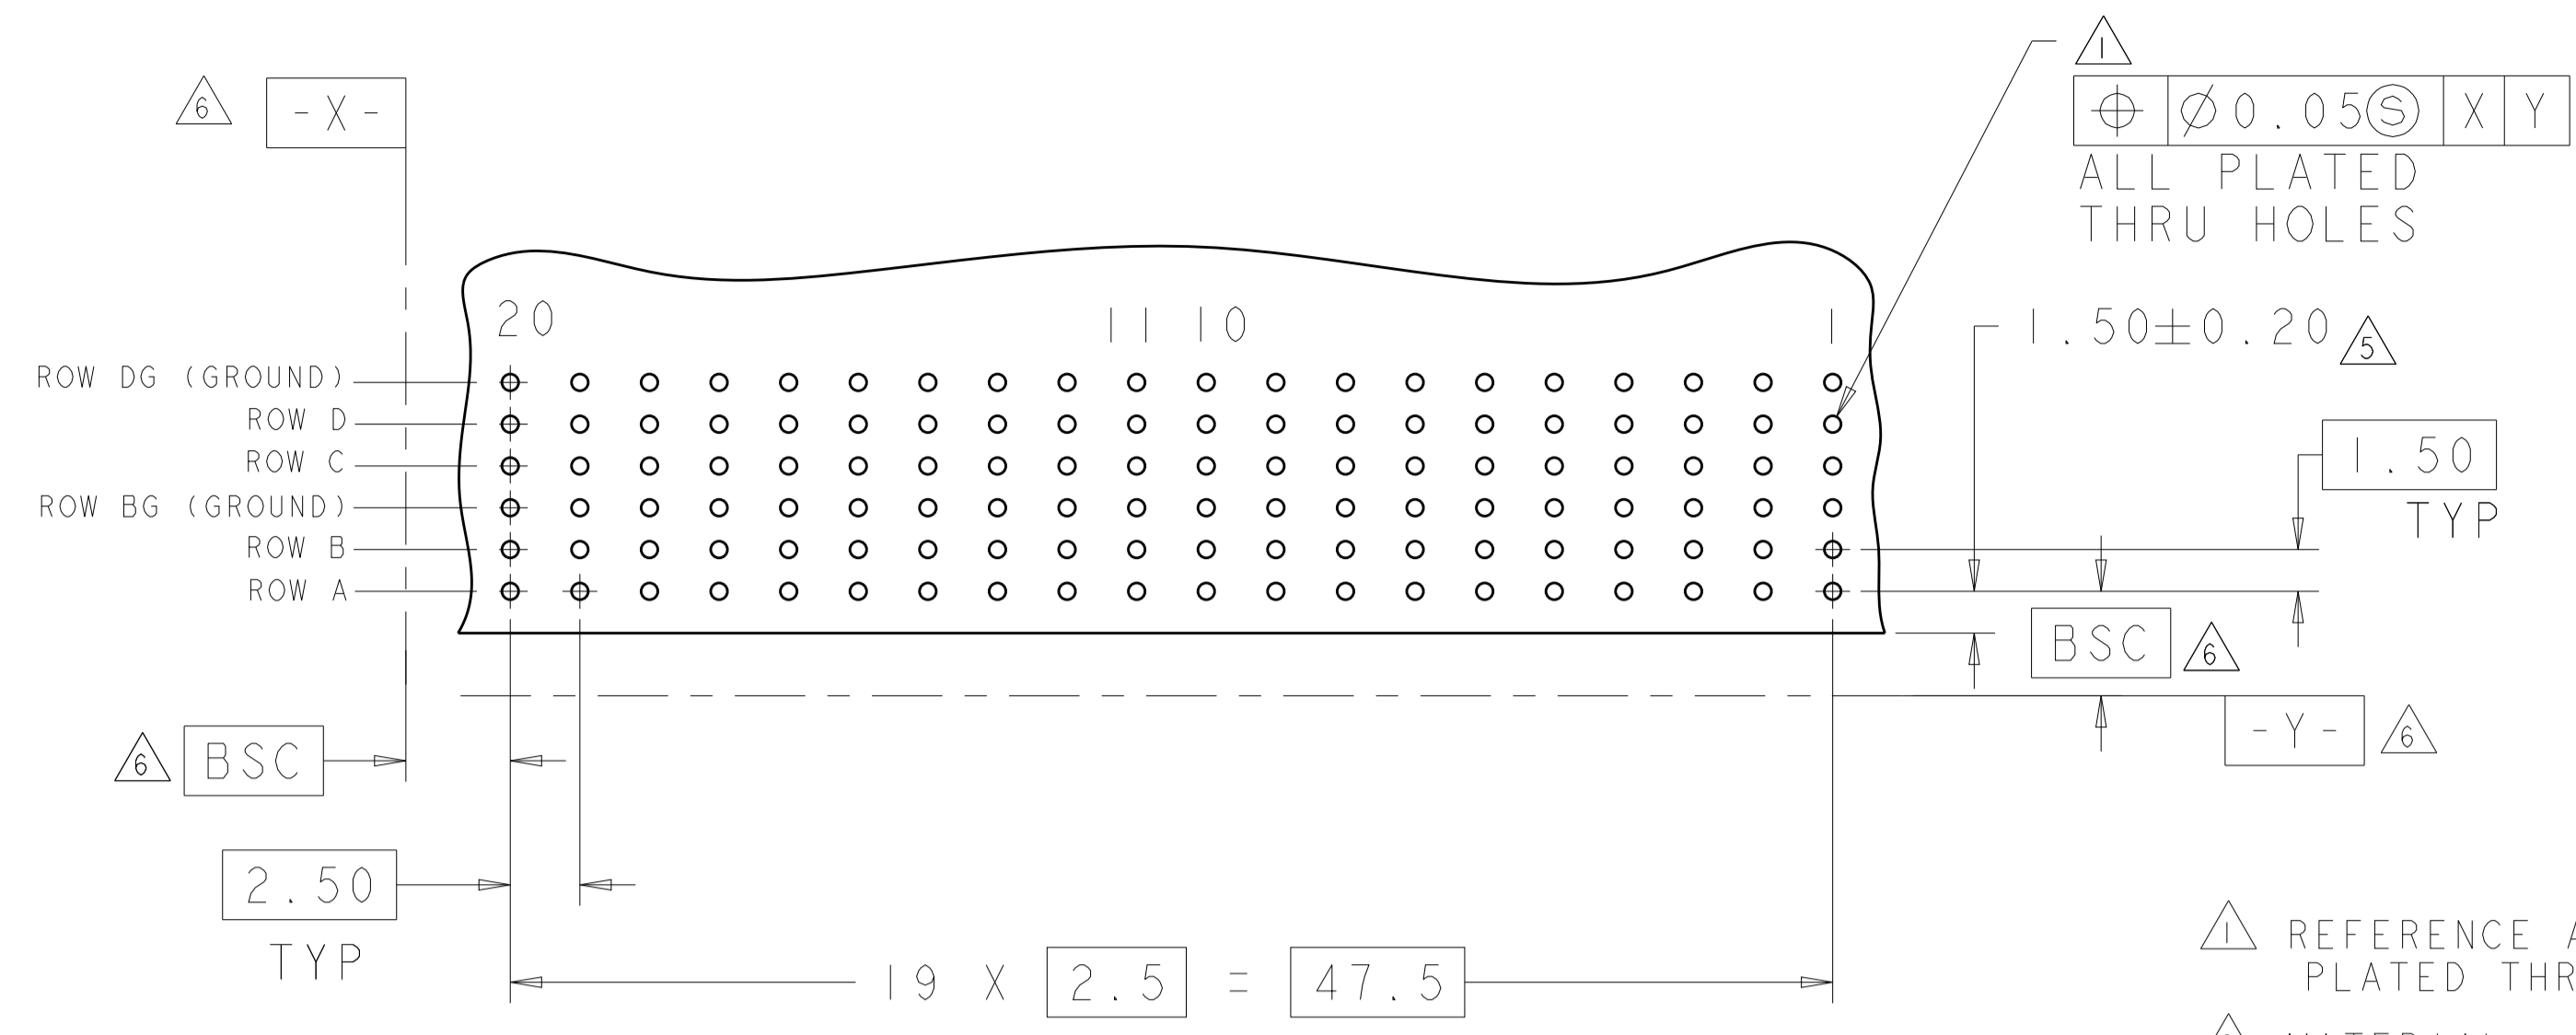
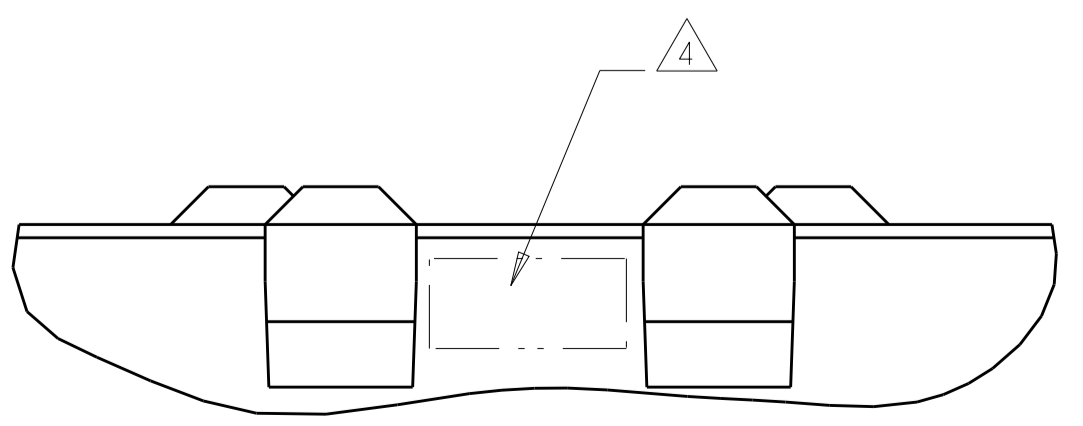


REVISIONS				
P.	LTN	DESCRIPTION	DATE	APPROV
E		REVISED PER ECO-14-005095	11APR2014	AP RP
F		REVISED PER ECO-16-008845	21SEP2016	AP RP

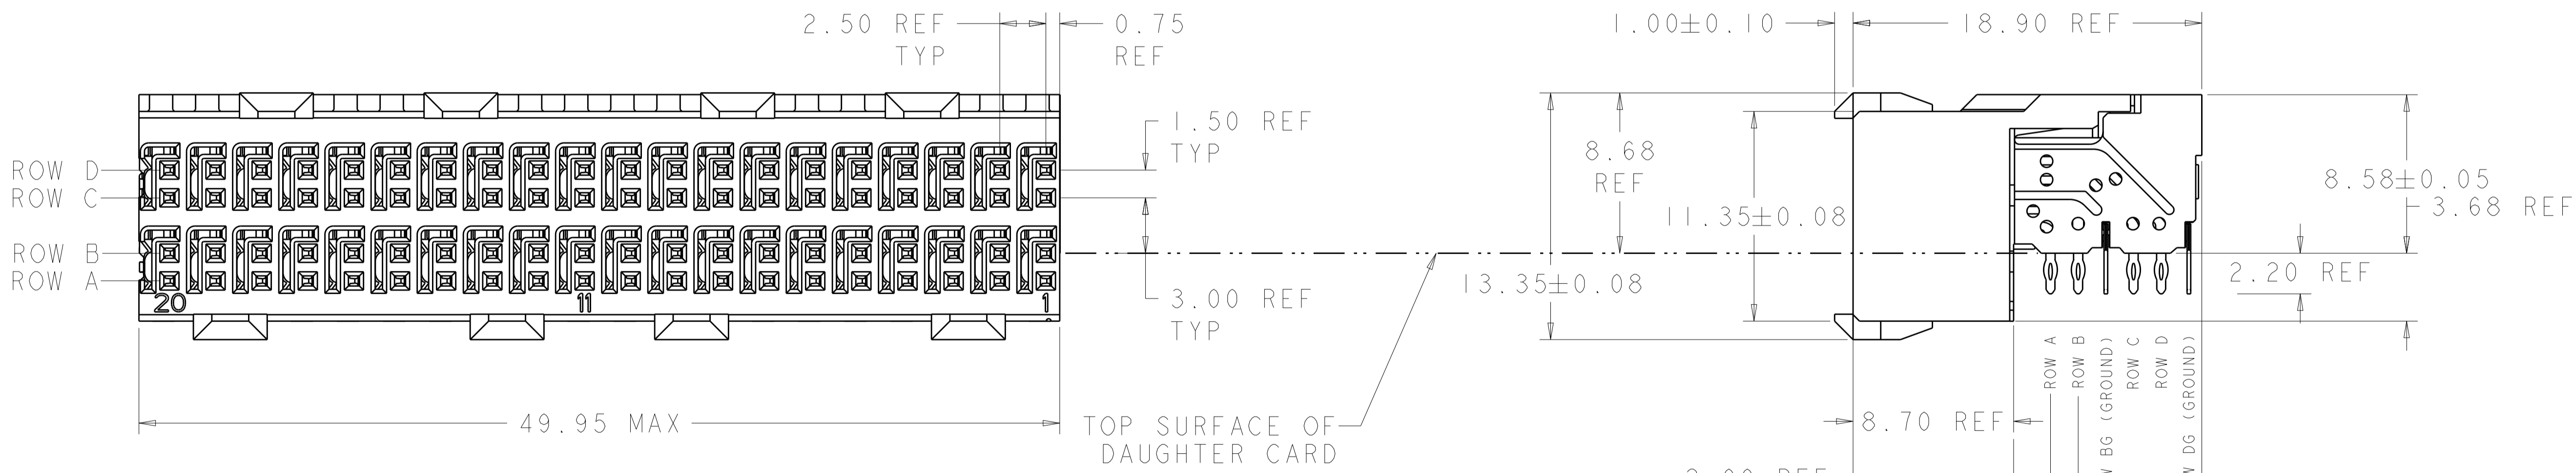

- △ REFERENCE APPLICATION SPEC 114-13059 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- △ MATERIAL:
SHIELD - PHOSPHOR BRONZE
CONTACT - COPPER-NICKEL-SILICON
HOUSING, CHICKLET AND CHICKLET COVER -
GLASS FILLED POLYESTER, UL 94V-0 RATED.
- △ FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5µm MIN BRIGHT TIN-LEAD OVER BASE PLATING
- △ CONNECTOR MARKED WITH PART NUMBER AND DATE CODE IN APPROXIMATE AREA SHOWN
- △ DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.

RECOMMENDED PC BOARD LAYOUT,
 DAUGHTER BOARD,
 COMPONENT SIDE SHOWN
 SCALE 4:1

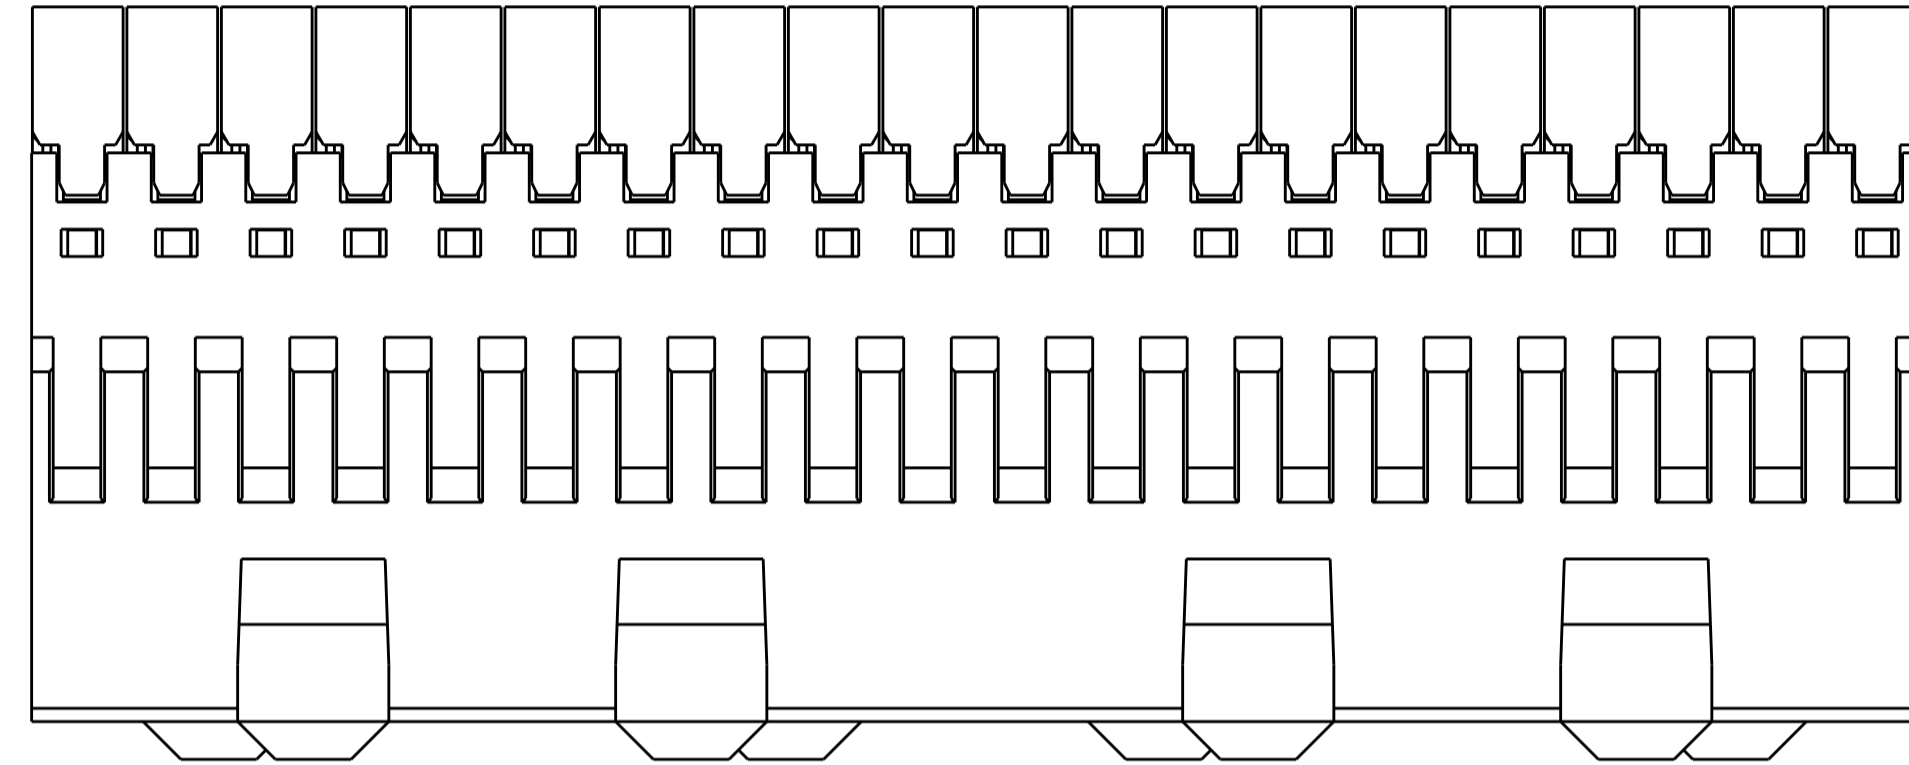

1469077-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN: S. J. MAGARO 25APR2002	TE Connectivity	
DIMENSIONS: mm		CHK: N. F. SCHRÖLL 25APR2002	NAME: RECEPTACLE ASSEMBLY, 2 PAIR, 50mm, HMZd	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: B. PATTERSON 16MAY2007	SIZE: A100779C=1469077	
0 PLC ±		PRODUCT SPEC:	RESTRICTED TO:	
1 PLC ±		APPLICATION SPEC:	SCALE: 5:1 SHEET 1 OF 1 REV F	
2 PLC ±		WEIGHT:		
3 PLC ±		CUSTOMER DRAWING:		
4 PLC ±				
ANGLES ±				
FINISH:				