


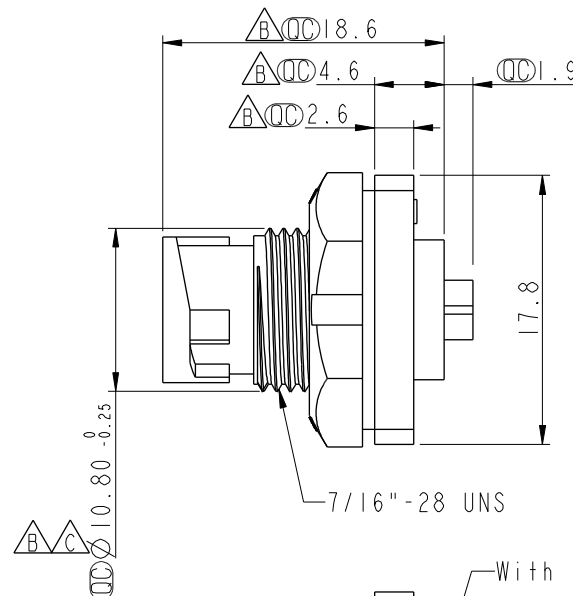



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-9C0093	2009/12/16	Vicky	REF. TO ECR/N. NOTE.
D	LEN1741235	2017/04/13	Ruru	Change Logo
E	CI90268	2019/02/18	Ruru	Modify Note


ALTW
CONFIDENTIAL
2019-02-18
R&D DEPT.



Pin Assignments
Front View

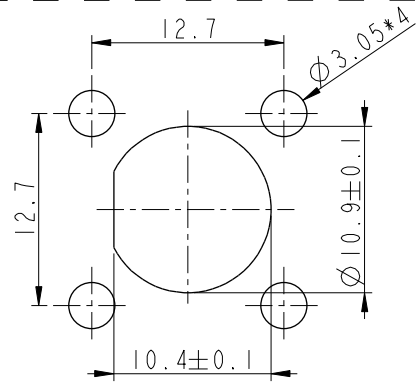

Recommended Panel Cut-Out

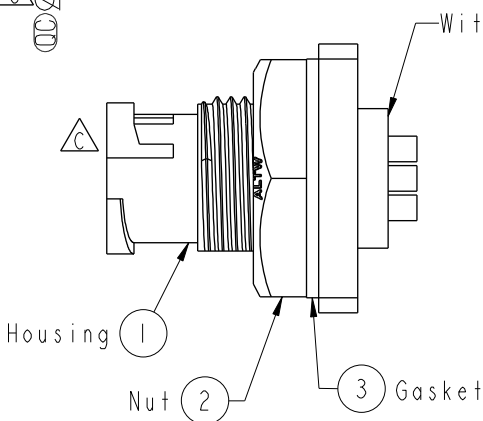

With Liquid Glue

Note: $\triangle$

- * CC Important Dimension.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Shield: Metal, Nickel Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- $\triangle$ * Use with waterproof cap or dust cap
Panel Thickness Max. 2.5mm.
- $\triangle$ * Use without waterproof cap or dust cap
Panel Thickness Max. 3.5mm.
- * Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE Mini Panel Lock 5Pin M Conn. M Pin		ITEM NO ASU-05PMMS-LS7001		DRAWN BY Ruru		DATE 2019-02-18	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 2:1		DWG NO ASU-05PMMS-LS7001		CHECKED BY Rita		DATE 2019-02-18	
REV. E		WC-REV. A.3		CUSTOMER ALTW		APPROVED BY Max		DATE 2019-02-18	
		SHEET 1 OF 1							
		QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司