
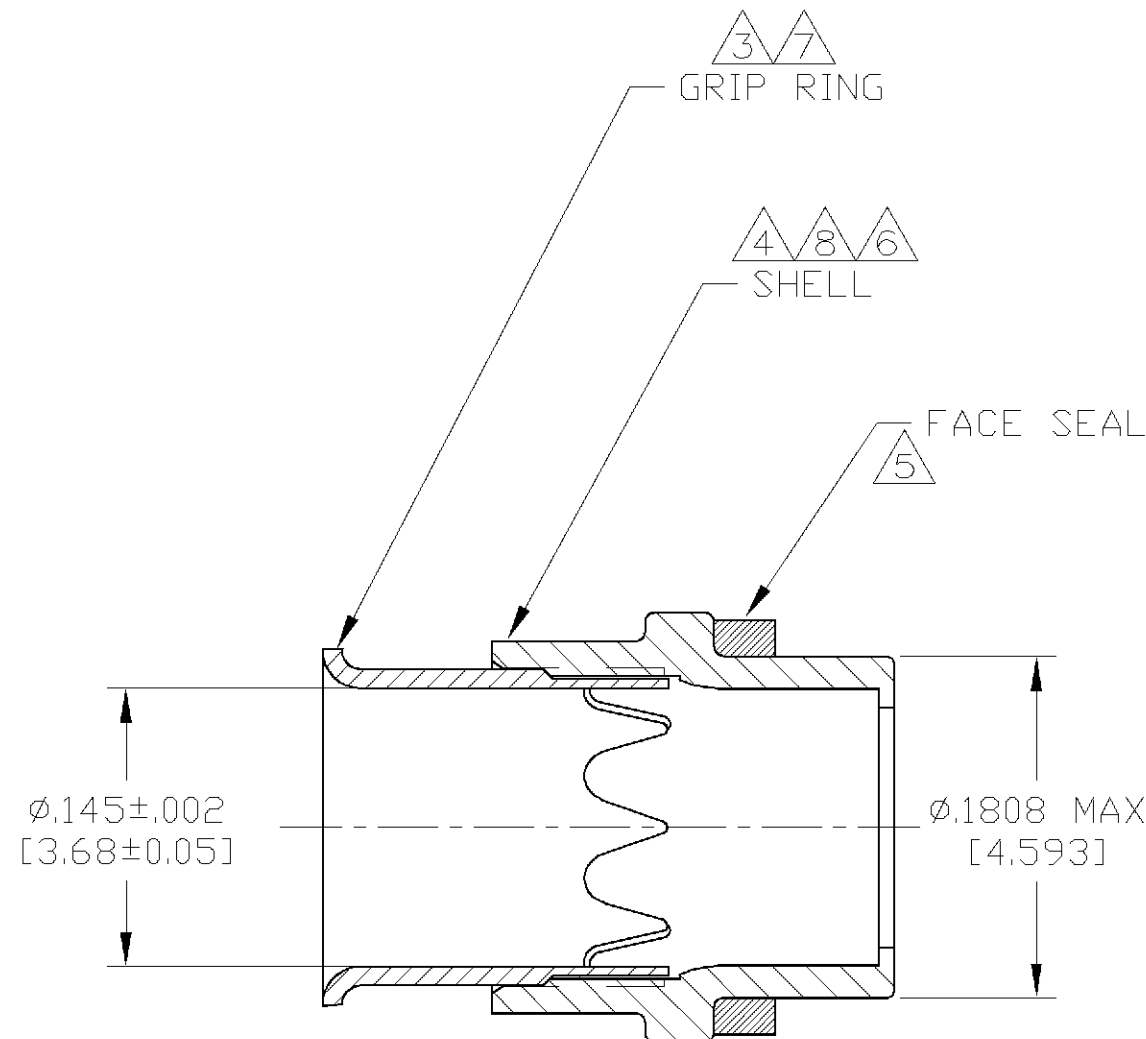
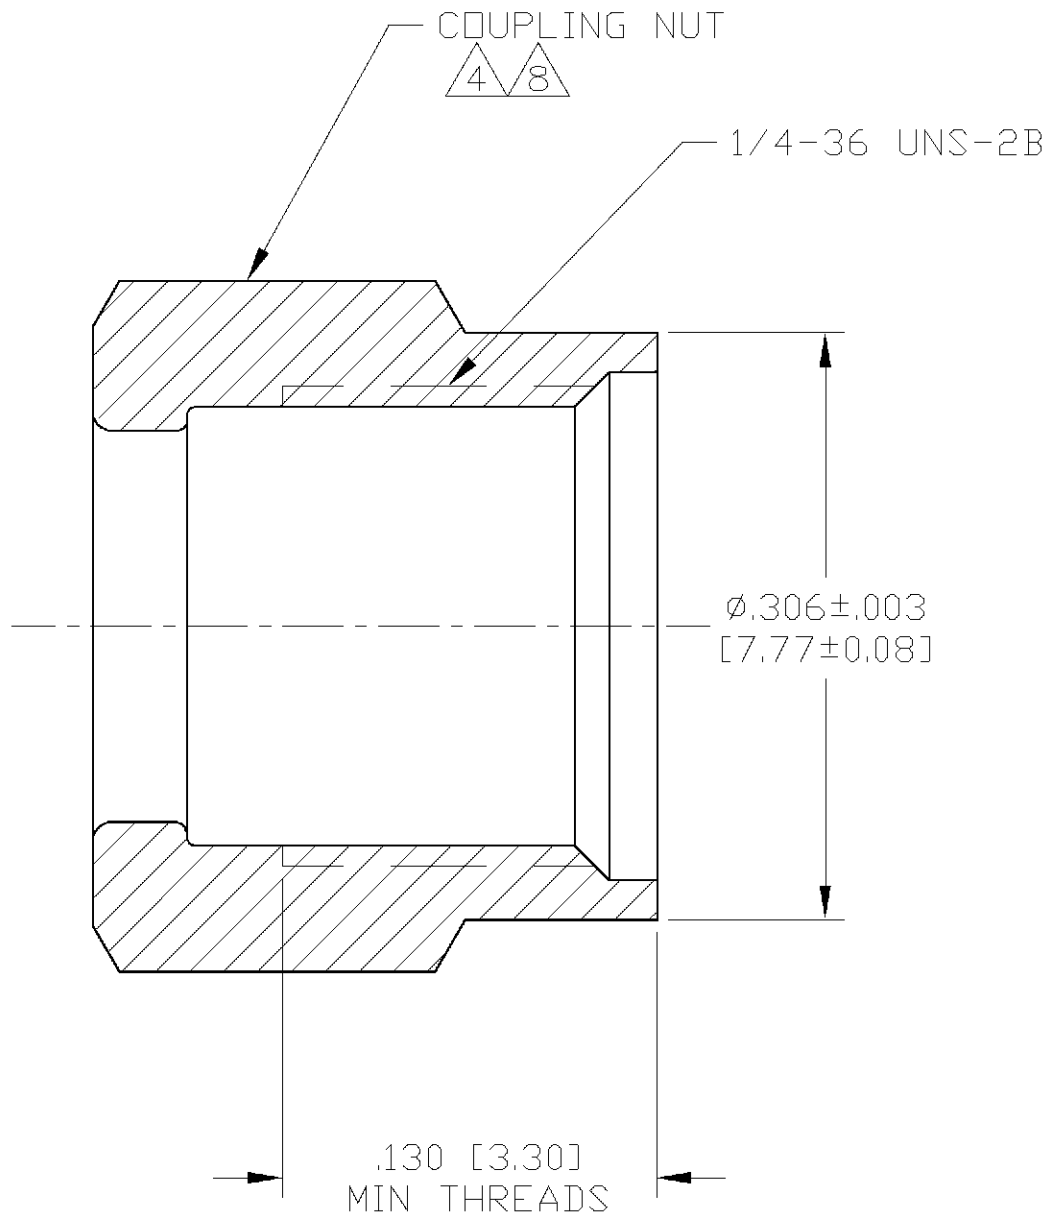
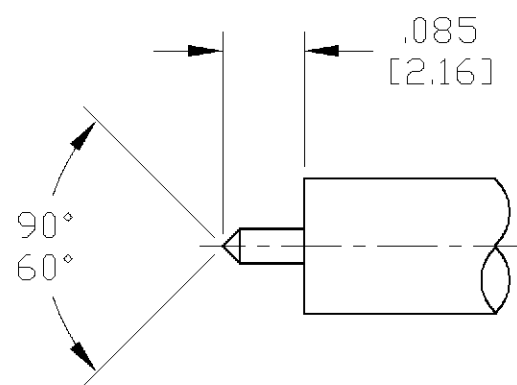


| LOC | DIST | REVISIONS |     |             |      |      |
|-----|------|-----------|-----|-------------|------|------|
| DF  | X0   | P         | LTR | DESCRIPTION | DATE | DWN  |
|     |      |           |     |             |      | APVD |
|     |      | O         |     | RELEASED    | 4-02 | CT   |
|     |      |           |     |             |      | JM   |

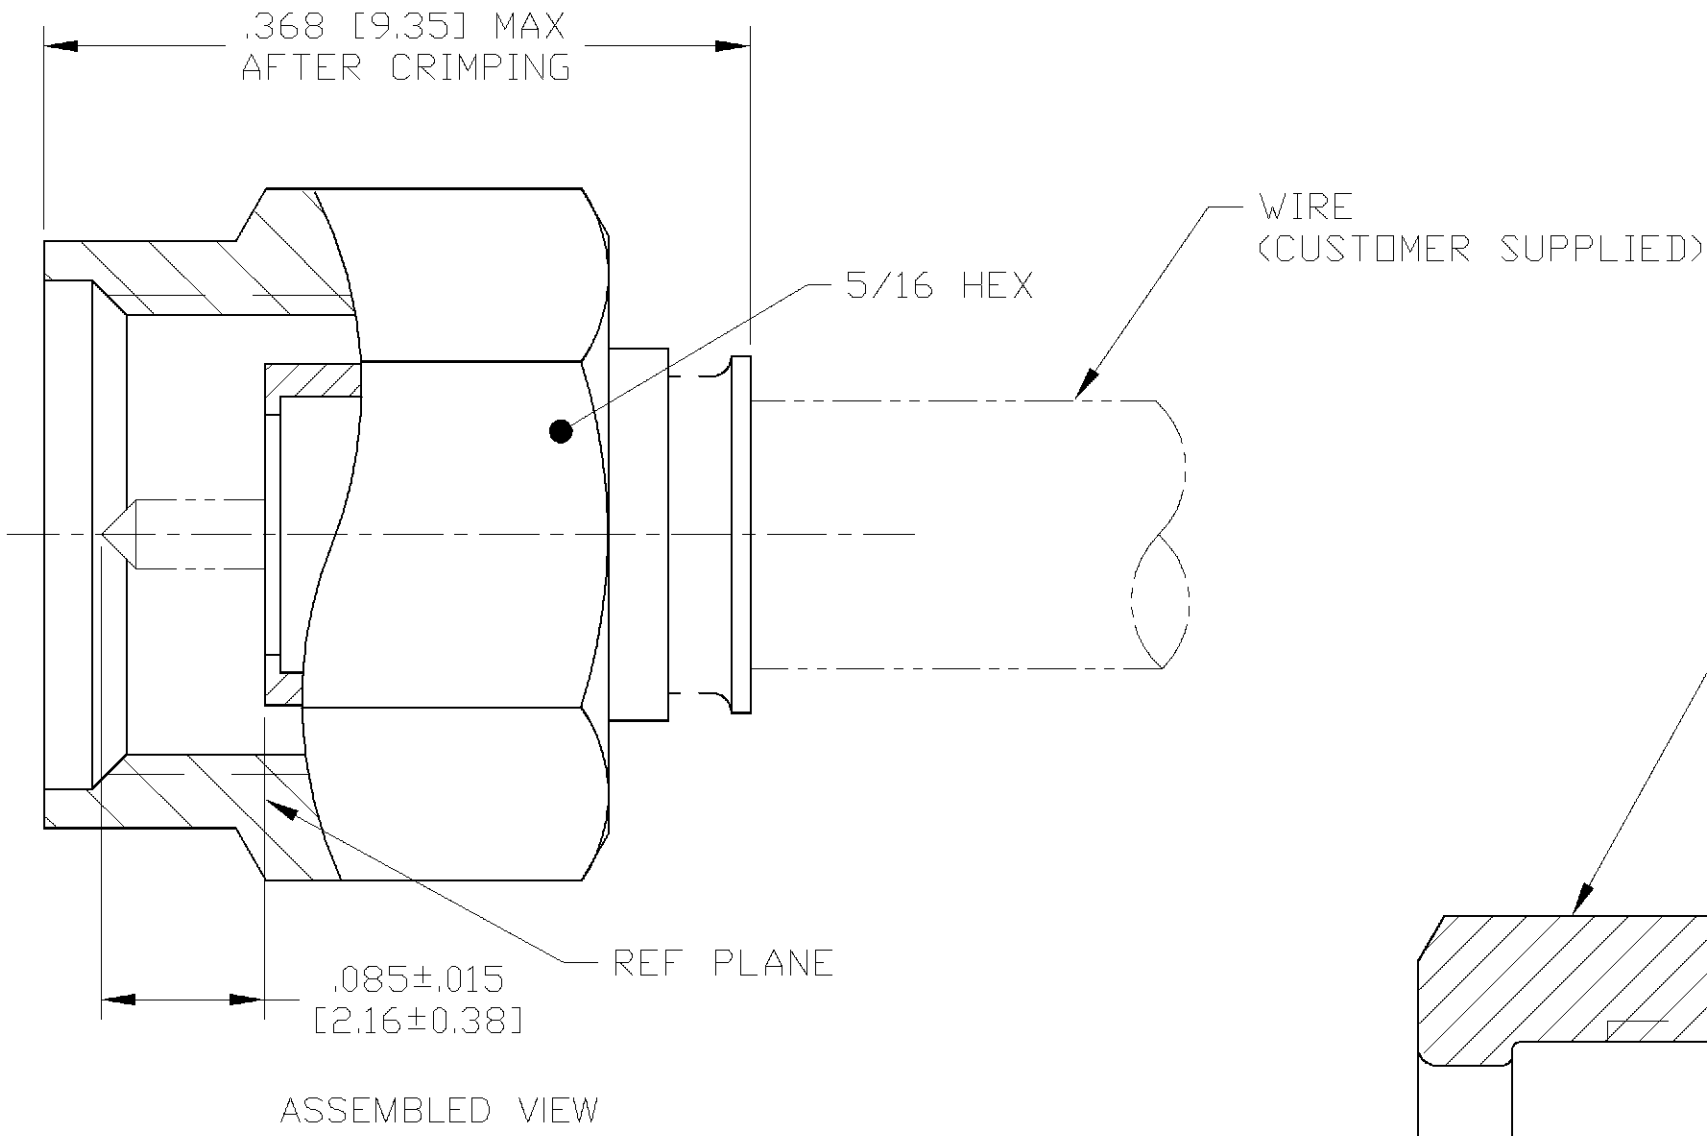

- FOR USE WITH RG-402/U, .141 [3.58] SEMI-RIGID CABLE.
- SEE I.S. 6788.
- BRASS PER MIL-C-50.
- STAINLESS STEEL PER ASTM-A-582
- SILICONE RUBBER PER ZZ-R-765.
- LOCTITE SEALANT
- NICKEL PLATE PER QQ-N-290.
- PASSIVATION PER QQ-P-35.
- .500 [12.70] MIN LENGTH OF STRAIGHT CABLE REQUIRED TO APPLY THE CONNECTOR.
- FREQUENCY RANGE: 0 TO 26.5 GHZ.

|                                        |  |                                        |           |                            |  |            |                                                       |                  |  |
|----------------------------------------|--|----------------------------------------|-----------|----------------------------|--|------------|-------------------------------------------------------|------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  | DWN                                    | 10APR2002 | <b>tyco</b><br>Electronics |  |            | Tyco Electronics Corporation<br>Harrisburg, Pa. 17105 |                  |  |
| DIMENSIONS:<br>INCHES [mm]             |  | CHK                                    | 4-11-02   |                            |  |            | NAME                                                  |                  |  |
|                                        |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |           | J.MARKEY                   |  | 4-11-02    |                                                       | PRODUCT SPEC     |  |
|                                        |  | 0 PLC ± -                              |           | J.MARKEY                   |  | 4-11-02    |                                                       | APPLICATION SPEC |  |
|                                        |  | 1 PLC ± -                              |           | —                          |  | —          |                                                       | —                |  |
| MATERIAL                               |  | FINISH                                 |           | WEIGHT                     |  | —          |                                                       | —                |  |
| SEE CALLOUTS                           |  | SEE CALLOUTS                           |           | CUSTOMER DRAWING           |  | SCALE 10:1 |                                                       | SHEET 1 OF 1     |  |
|                                        |  |                                        |           |                            |  |            |                                                       | REV 0            |  |