

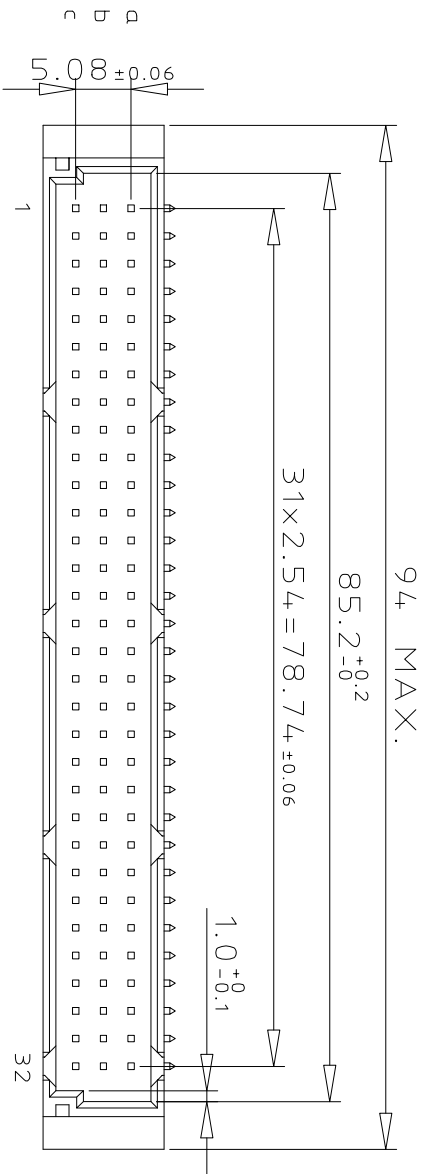


DIMENSIONS

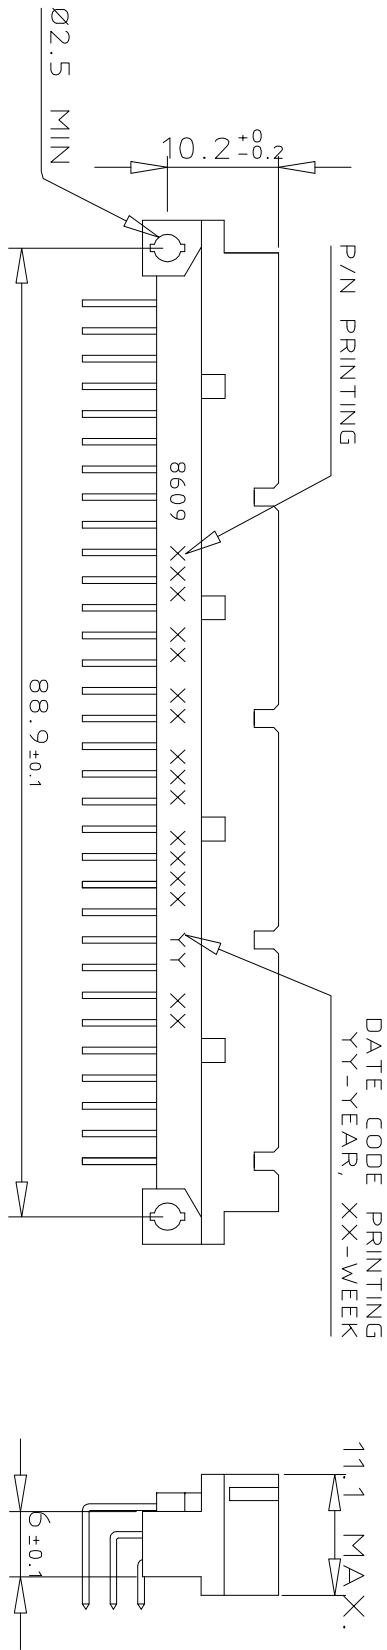


TERMINATION

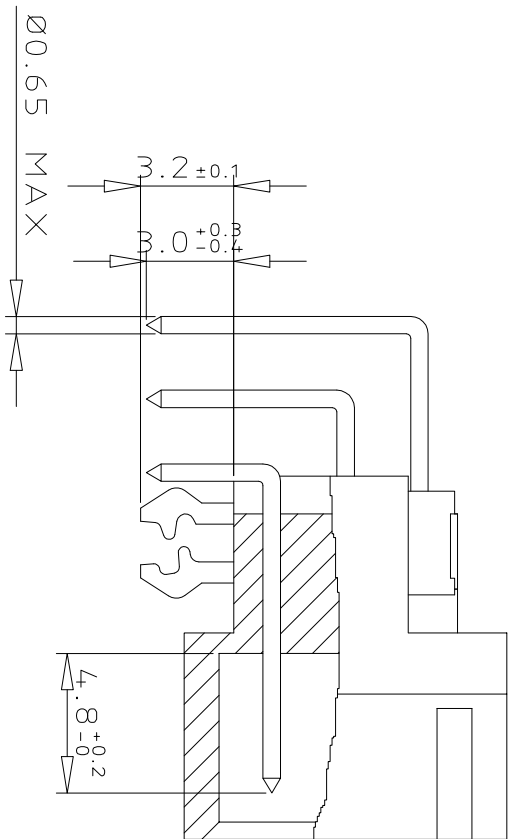

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS	ROW a	b	c	d	e	f	g	h	i	j
ROW a - c	3	4	6	7	8	9	10	11	12	13
NO. OF CONTACTS	3	4	6	7	8	9	10	11	12	13
TYPE OF INSULATOR	3	4	6	7	8	9	10	11	12	13
3 ROW MALE INSULATOR	3	4	6	7	8	9	10	11	12	13
METHOD OF MOUNTING	3	4	6	7	8	9	10	11	12	13
STANDARD MOUNTING - STYLE C	3	4	6	7	8	9	10	11	12	13
TERMINATION	3	4	6	7	8	9	10	11	12	13
ANGLED SPILL	3	4	6	7	8	9	10	11	12	13
OPTIONS	3	4	6	7	8	9	10	11	12	13
NO. OPTION	3	4	6	7	8	9	10	11	12	13
WITH HARPOONS	3	4	6	7	8	9	10	11	12	13
PERFORMANCE CLASS	3	4	6	7	8	9	10	11	12	13
DIN 4,1612 CLASS 3	3	4	6	7	8	9	10	11	12	13
DIN 4,1612 CLASS 2	3	4	6	7	8	9	10	11	12	13
DIN 4,1612 CLASS 1	3	4	6	7	8	9	10	11	12	13
AS PER MIL C 55302 / JSS 50808	3	4	6	7	8	9	10	11	12	13
PITCH PER ROW	3	4	6	7	8	9	10	11	12	13
2.54 mm	3	4	6	7	8	9	10	11	12	13
LEAD FREE VERSION	3	4	6	7	8	9	10	11	12	13
ELF	3	4	6	7	8	9	10	11	12	13

PCB LAYOUT

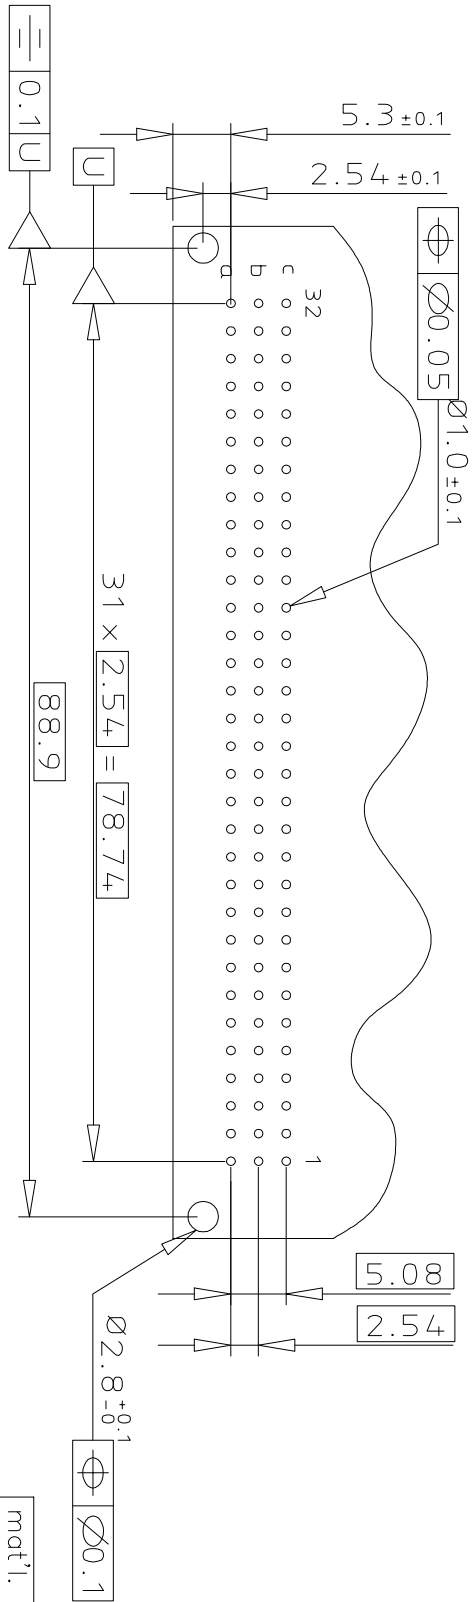

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code	surface	tolerance	projection	product family
SEE DRAWING C-8609-0000A	ISO 1302	ISO 406 ISO 1101	ISO 1101	8609
ltr	ecn	no	dr	ddte
A	104-0063	MINI	2004-09-16	angles
B	105-0042	MINI	2005-05-19	linear
C	106-0061	MINI	2006-05-31	0°±2°
D	107-0100	KR	2007-08-20	dr
E	108-0146	KR	2008-10-21	engr
				chr
				qppl
sheet index	revision	sheet	1	



dwg no	sheet 1 of 1	size
C-8609-2001	A3	
type	Product	Customer Drawing