

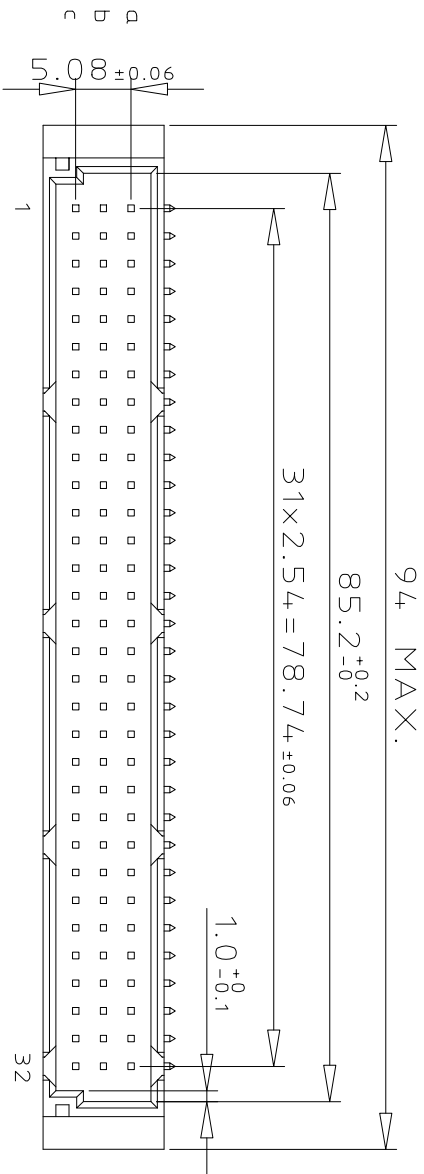



DIMENSIONS

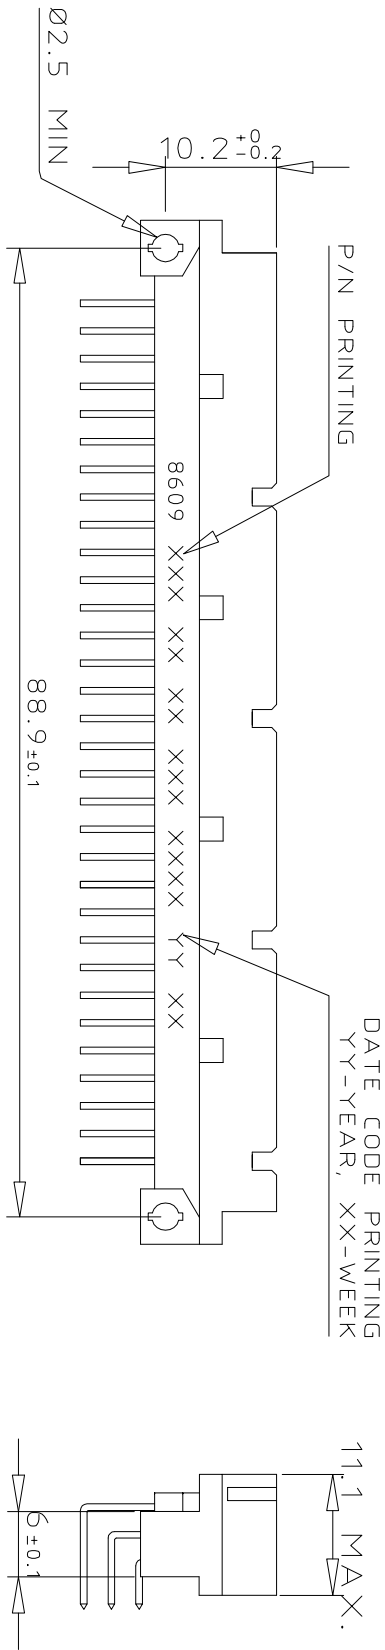

TERMINATION

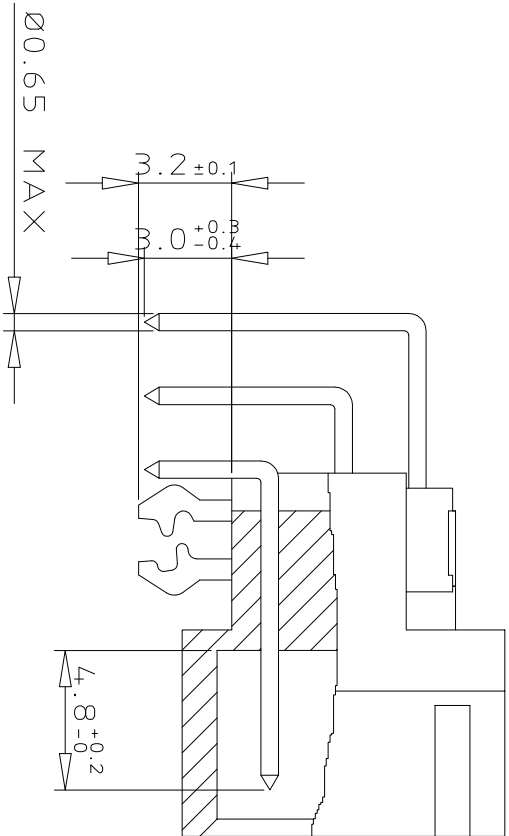

PCB LAYOUT

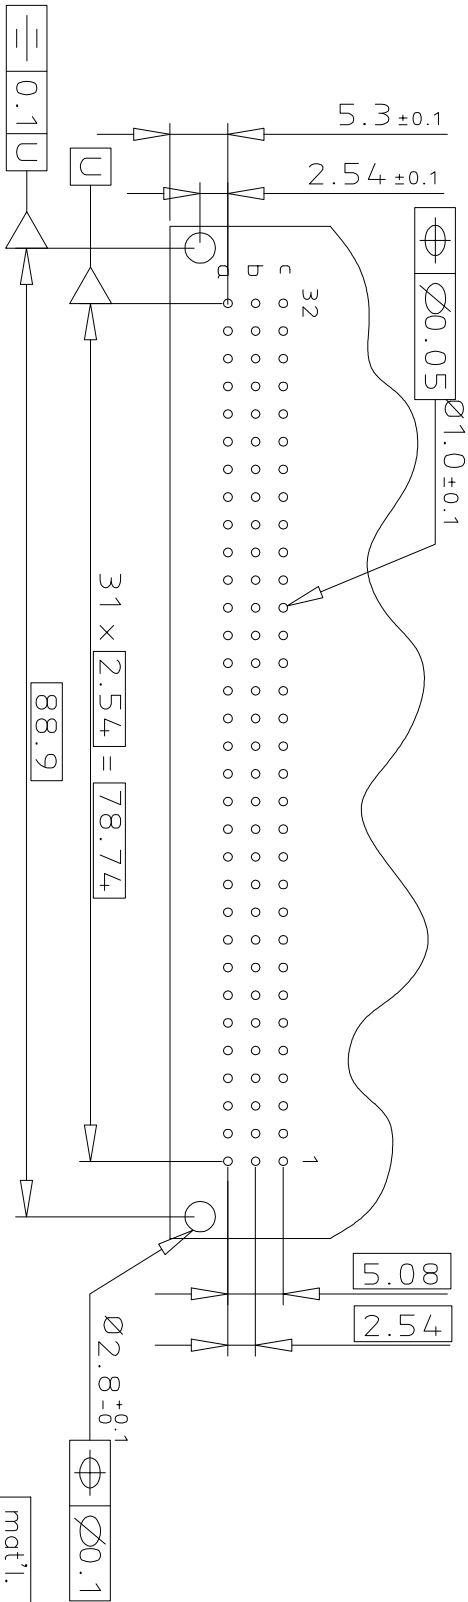

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	b	c								96
ROW a	b	c								64
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C										
TERMINATION										
ANGLED SPILL										
OPTIONS										
NO. OPTION										
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 4,1612 CLASS 3										
DIN 4,1612 CLASS 2										
DIN 4,1612 CLASS 1										
AS PER MIL C 55302 / JSS 50808										
PITCH PER ROW										
2.54 mm										
LEAD FREE VERSION										
ELF										

GENERAL CHARACTERISTICS & ROHS INFO	
REFER DRAWING C-8609-0000A	

mat'l. code				surface		tolerance		projection		product family									
SEE DRAWING C-8609-0000A				ISO 1302		ISO 406 ISO 1101				8609									
ltr	ecn	no	dr	date	tolerances unless otherwise specified		0.X	±0.1			title								
A	104-0063	MINI	2004-09-16	angles	linear		0.XX	±0.1			DIN STANDARD HEADER								
B	105-0042	MINI	2005-05-19				0.XX	±0.1			DIN 41612 STYLE C								
C	106-0061	MINI	2006-05-31	0°±2°	0.XXX		±0.1	Scale 3:2		dwg no									
D	107-0100	KR	2007-08-20	dr	MINI K V	2004-09-16				sheet 1 of 1									
E	108-0146	KR	2008-10-21	engr	RAKHEE G	2004-09-16				C-8609-2001									
				chr	KESAVAN R	2008-10-21				A3									
				qppd	KESAVAN R	2008-10-21				type Product Customer Drawing									
sheet index	revision	E																	
	sheet	1																	



Copyright FCI