



DIMENSIONS

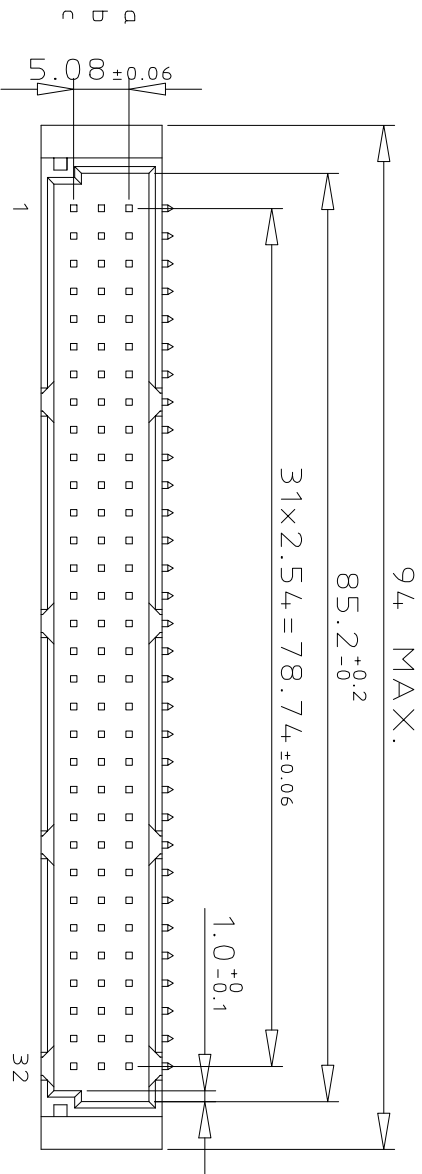


TERMINATION

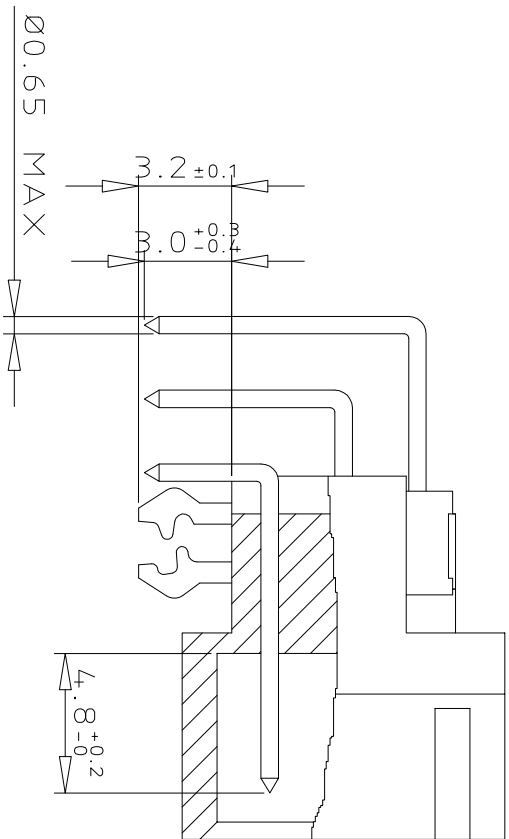

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS										
ROW a	b	c								96
ROW a	b	c								64
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR 7										
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C 1										
TERMINATION										
ANGLED SPILL 13										
OPTIONS										
NO. OPTION 7										
WITH HARPOONS H										
PERFORMANCE CLASS										
DIN 4,1612 CLASS 3 4										
DIN 4,1612 CLASS 2 5										
DIN 4,1612 CLASS 1 6										
AS PER MIL C 55302 / JSS 50808 8										
PITCH PER ROW										
2.54 mm 5										
LEAD FREE VERSION ELF										

PCB LAYOUT

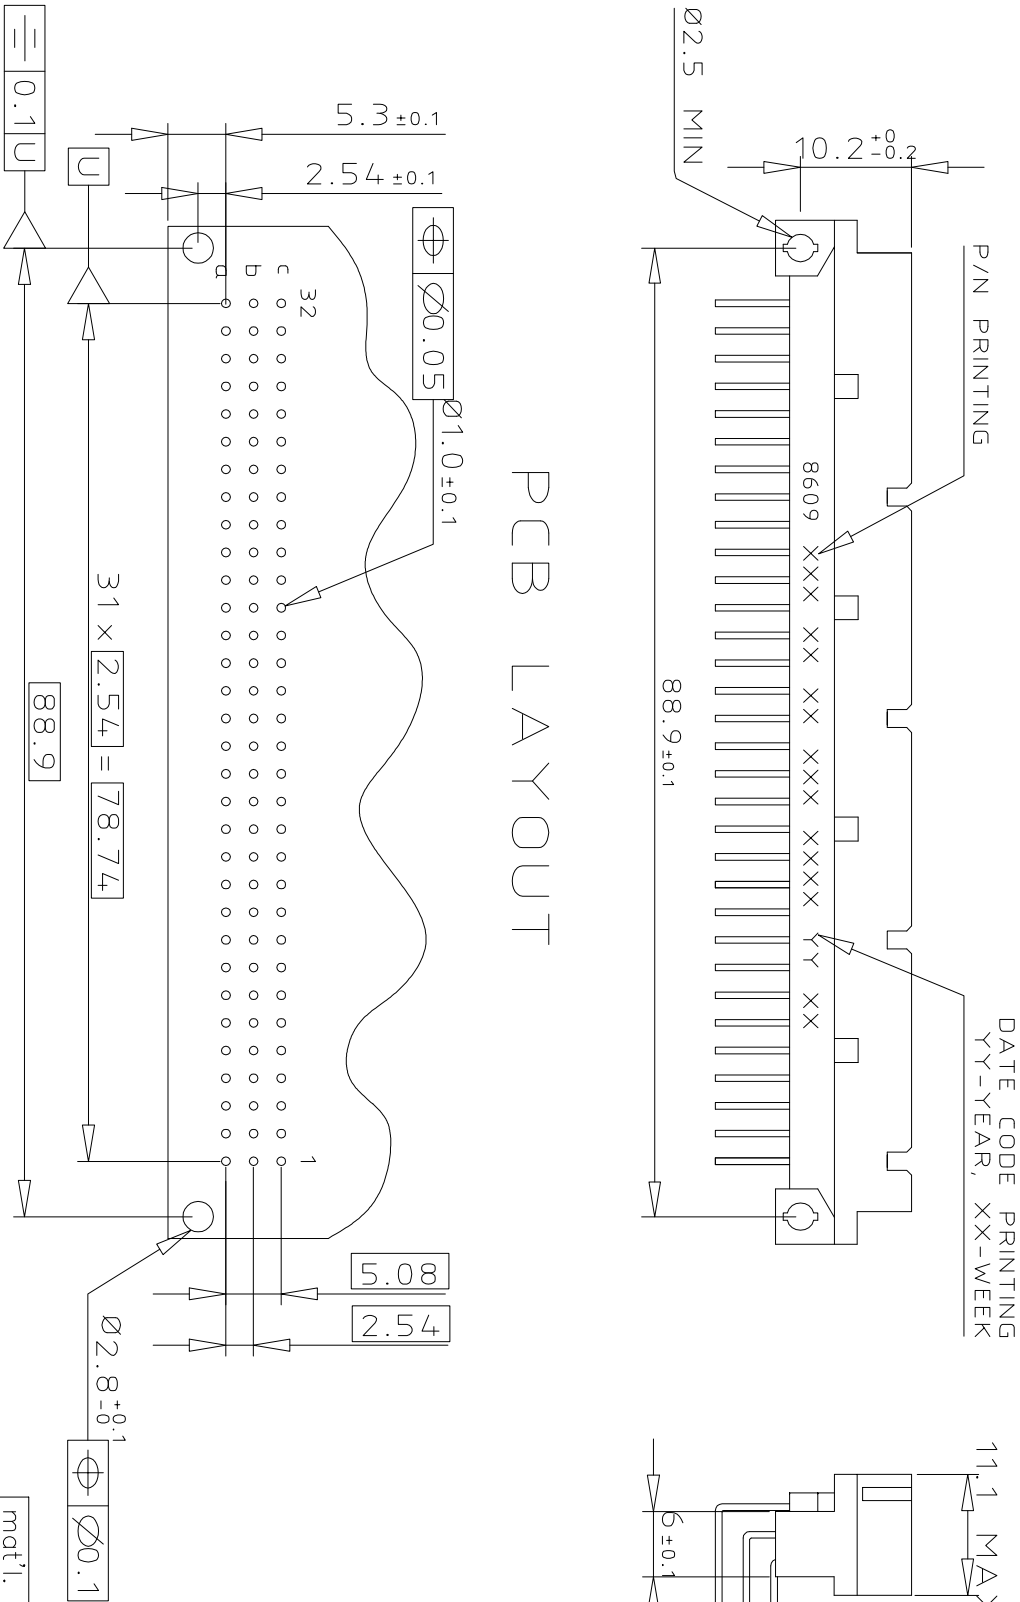

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code				surface		tolerance		projection		product family	
SEE DRAWING C-8609-0000A				ISO 1302		ISO 406 ISO 1101				8609	
ltr	ecn	no	dr	date	tolerances unless otherwise specified		mm		title		
A	104-0063	MINI	2004-09-16		angles	linear	0.X	±0.1	DIN STANDARD HEADER		
B	105-0042	MINI	2005-05-19				0.XX	±0.1	DIN 41612 STYLE C		
C	106-0061	MINI	2006-05-31		0°±2°		0.XXX	±0.1	dwg no		
D	107-0100	KR	2007-08-20	dr	MINI K V				sheet 1 of 1		
E	108-0146	KR	2008-10-21	engr	RAKHEE G				size		
				chr	KESAVAN R				A3		
				qppd	KESAVAN R				type Product Customer Drawing		
sheet index	revision	E									
	sheet	1									