

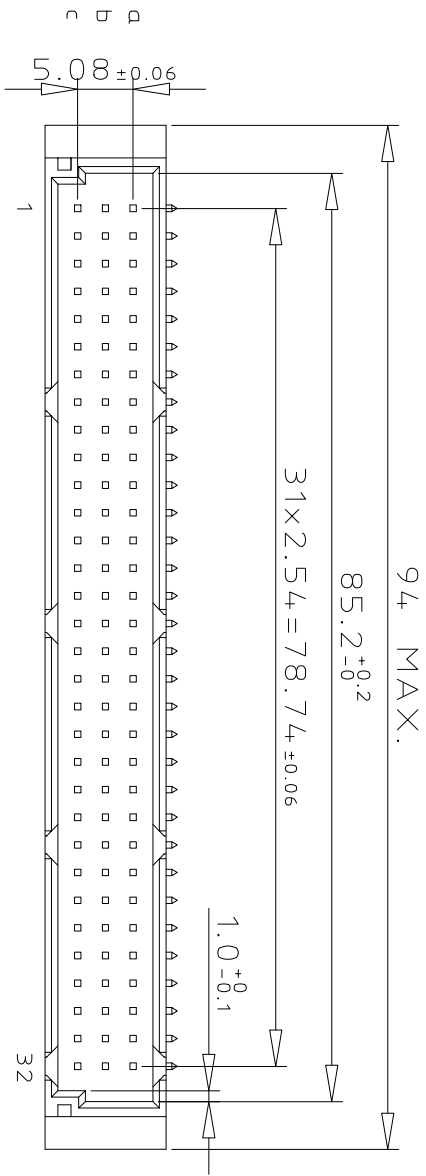



DIMENSIONS

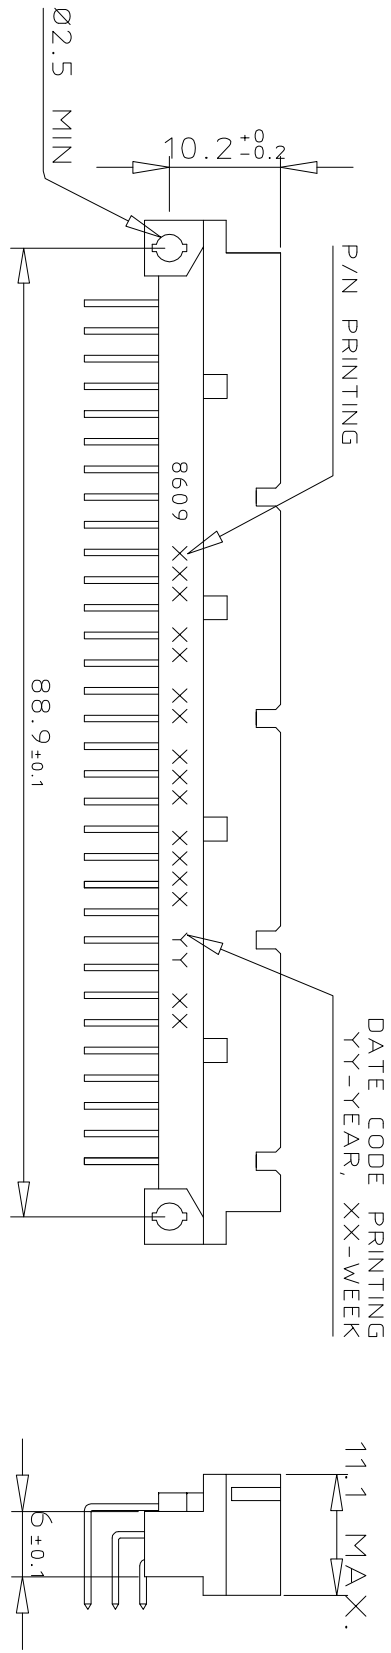

TERMINATION

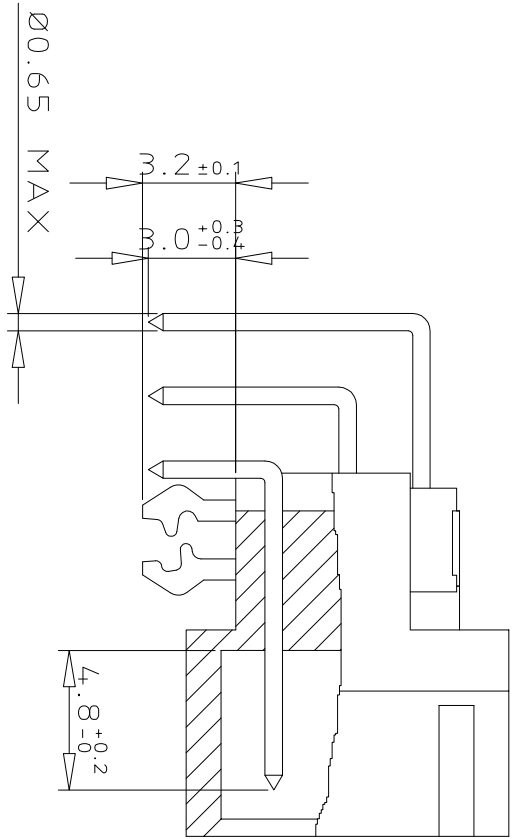

PCB LAYOUT

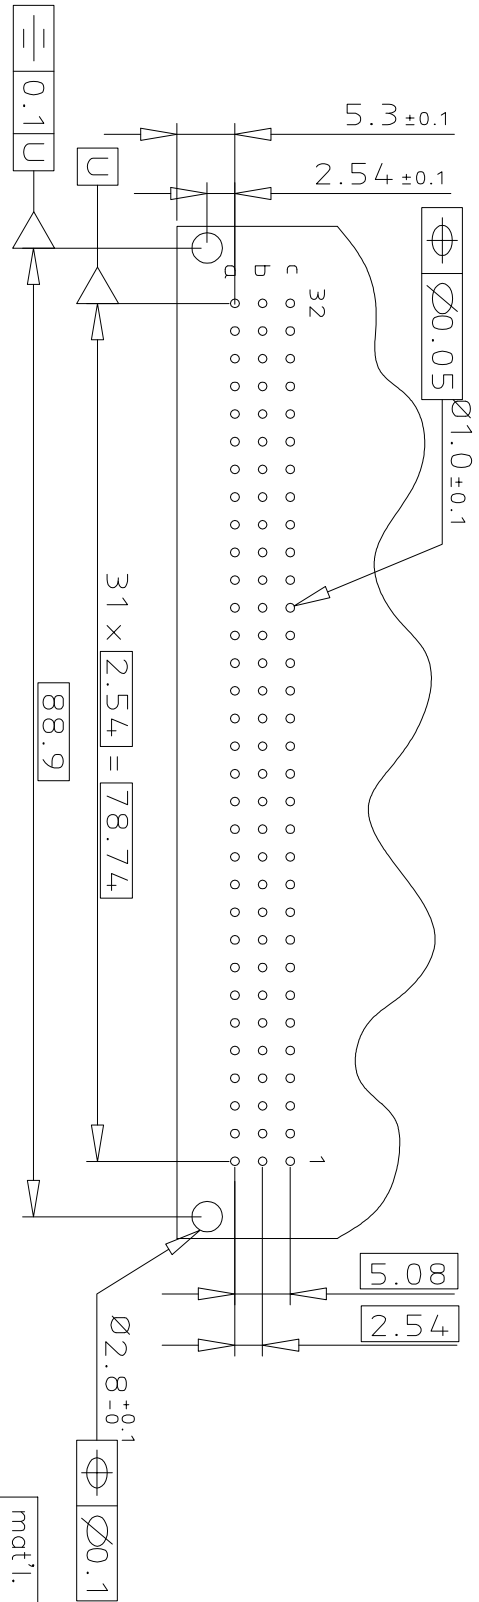

ORDERING INFORMATION

SERIES	8609	3	96	7	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS	ROW a	b	c							96
ROW a - c										64
NO. OF CONTACTS										
TYPE OF INSULATOR										
3 ROW MALE INSULATOR										7
METHOD OF MOUNTING										
STANDARD MOUNTING - STYLE C										1
TERMINATION										
ANGLED SPILL										13
OPTIONS										
NO. OPTION										7
WITH HARPOONS										
PERFORMANCE CLASS										
DIN 4,1612 CLASS 3										4
DIN 4,1612 CLASS 2										5
DIN 4,1612 CLASS 1										6
AS PER MIL C 55302 / JSS 50808										8
PITCH PER ROW										
2.54 mm										5
LEAD FREE VERSION										ELF

GENERAL CHARACTERISTICS & ROHS INFO
REFER DRAWING C-8609-0000A

mat'l. code	SEE DRAWING C-8609-0000A	surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family	8609
tr	ecn	no	dr	ddte	angles	linear	0.X	±0.1	title
A	104-0063	MINI	2004-09-16		0°±2°		0.XX	±0.1	DIN STANDARD HEADER
B	105-0042	MINI	2005-05-19				0.XX	±0.1	DIN 4,1612 STYLE C
C	106-0061	MINI	2006-05-31				0.XXX	±0.1	scale 3:2
D	107-0100	KR	2007-08-20	dr	MINI K V				dwg no
E	108-0146	KR	2008-10-21	engr	RAKHEE G				sheet 1 of 1
				chr	KESAVAN R				size
				qppd	KESAVAN R	2008-10-21			A3
sheet index	revision	E	1						type Product Customer Drawing



C-8609-2001

DIN STANDARD HEADER
DIN 4,1612 STYLE C

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A