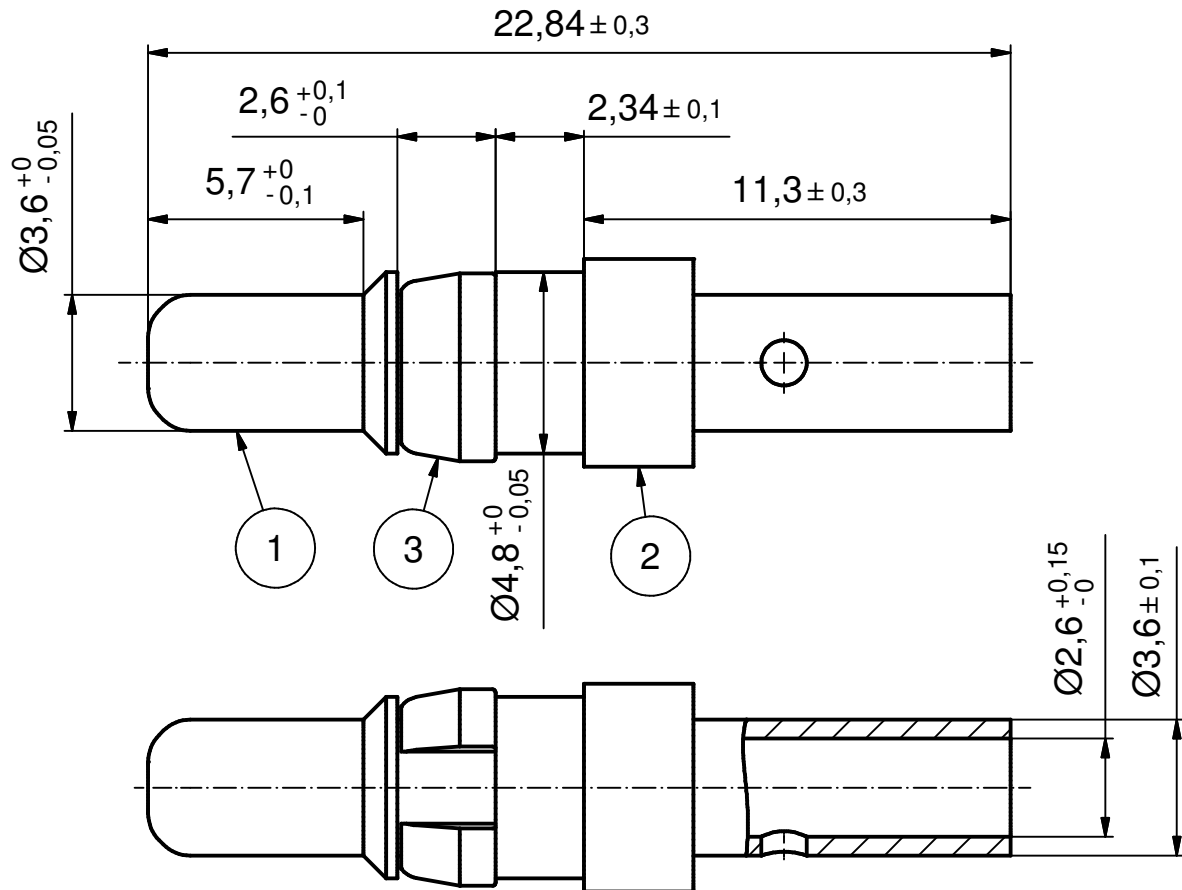


STRIPPING DIMENSIONS

Directive 2002/95/EC RoHS compliant

(b)

NOTES:

1. MATERIAL: COPPER ALLOY

2. PLATING:

ITEM 1: SEE TABLE

ITEM 2: GOLD FLASH over NICKEL

ITEM 3: NICKEL PLATED

3. CRIMPING: USE CRIMP TOOL 360X10409X

WITH TOOL INSERT 360X20029X

SELECTOR SETTINGS: 5 FOR AWG 12

4 FOR AWG 14

(b)

PLATING ITEM 1	PART-NO.
GOLD FLASH over NICKEL	131A11029X
min. 30µin HARD GOLD over min. 50µin NICKEL	131C11029X
min. 50µin HARD GOLD over min. 50µin NICKEL	131J11029X

(b)

THIS DRAWING MAY NOT BE COPIED OR
REPRODUCED IN ANY WAY, AND MAY NOT
BE PASSED ON TO A THIRD PARTY WITHOUT
WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish:			
SEE NOTES			
4 x b	Ä3854	19.01.11	K.H.
a	Origin		
rev.	description	date	name

CONEC®

scale:	5:1	
material:	SEE NOTES	
title:	HIGH POWER CONTACT MALE CRIMP VERSION 20A D-SUB COMBINATION	
dwg no:	13K1ID2A	DIN-A4
part no:	SEE TABLE	
		sh: 1