



REV.	DATE	DESCRIPTION
NC	05/24/05	INITIAL RELEASE
A	04/09/07	UPDATE DRAWING FORMAT



RECOMMENDED
CABLE STRIPPING DIM'S

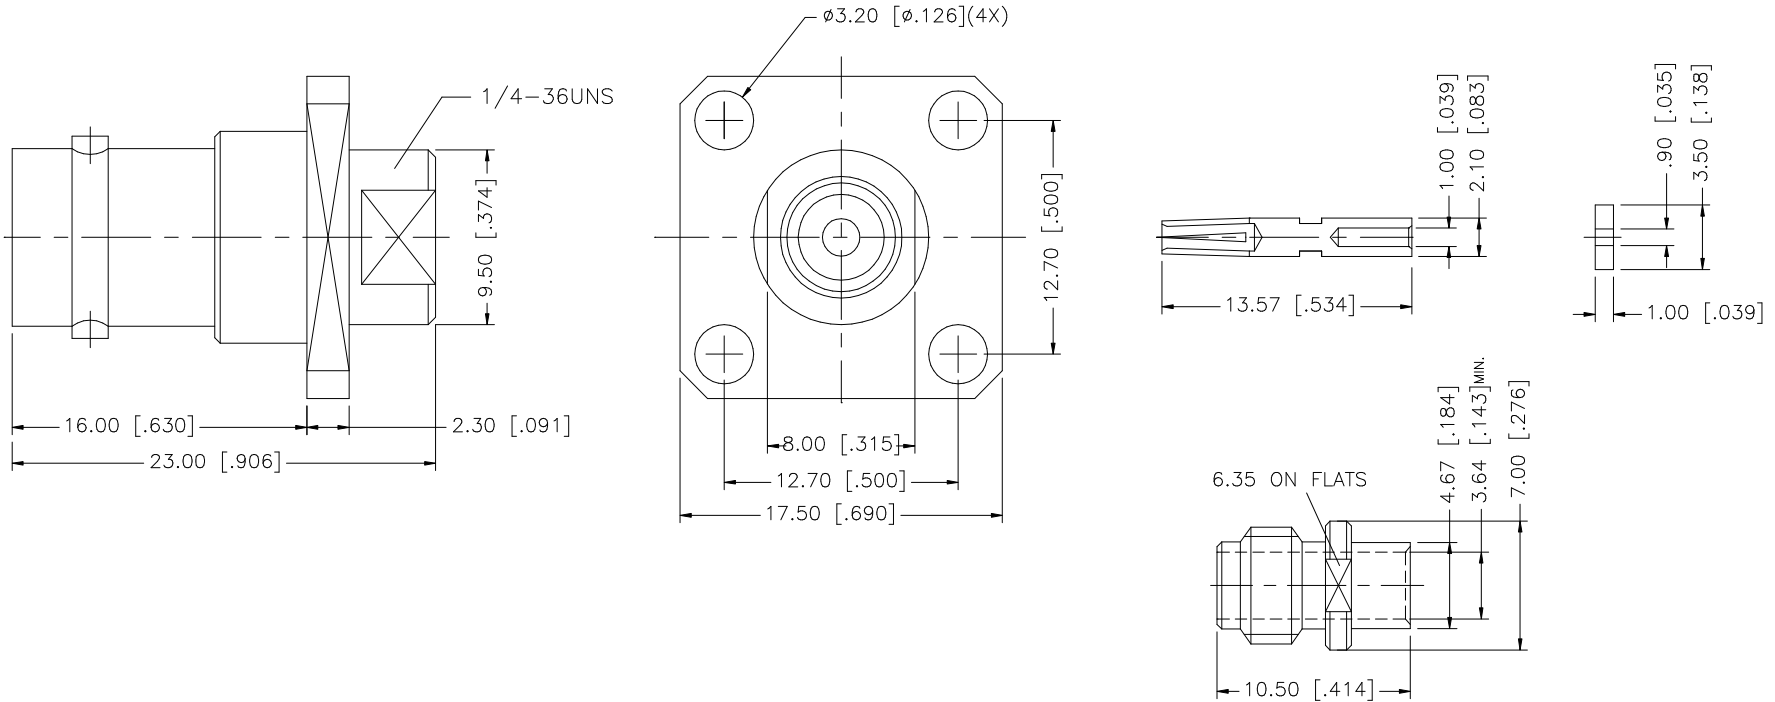

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						04/09/07
6						CHECKED			PART DESCRIPTION BNC PANEL DIRECT SOLDER JACK (FOR .141” SEMI RIGID CABLE)				
5						ISSUED							
4	SOLDER NUT	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 112619				
3	CONTACT PIN	PHOS. BRONZE	GOLD	1	CAD FILE C:/112/112619.DWG			DWG. NO. 112619.DWG					
2	INSULATOR	TEFLON	NATURAL	1							REV. A	SIZE A	SCALE NA
1	BODY	BRASS	NICKEL	1									
	DESCRIPTION	MATERIAL	FINISH	QTY									