
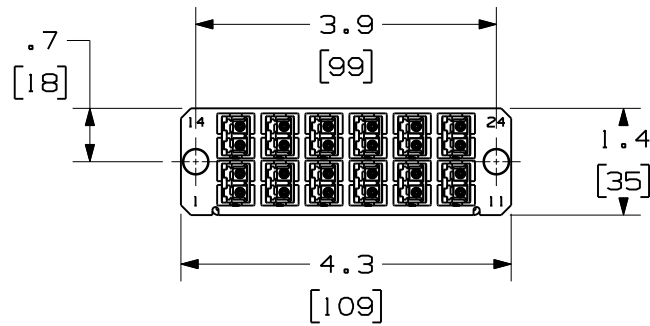


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

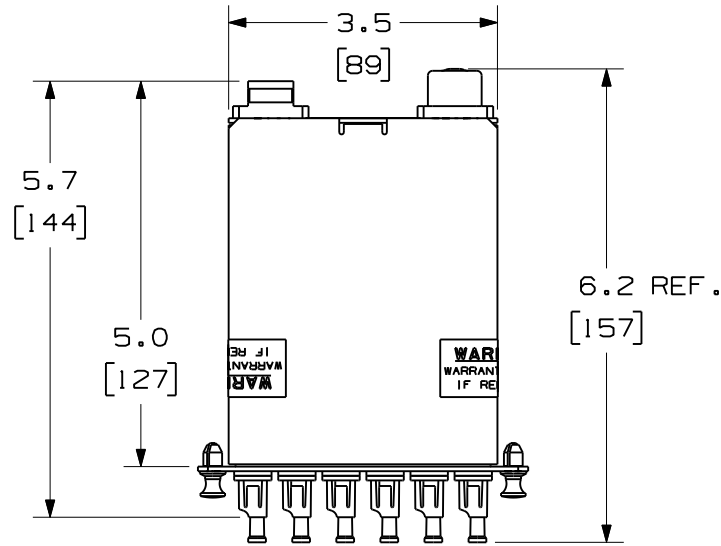


**FRONT VIEW**  
SHOWN W/O DUSTCAPS

PANDUIT P/N	DESCRIPTION
FCXO-24-10Y	OPTIMIZED 50/125 10GbE MULTIMODE 24 FIBER, MTP TO LC CASSETTE MODULE
FCX-24-10Y	50/125 10GbE MULTIMODE 24 FIBER, MTP TO LC CASSETTE MODULE
FCZO-24-10Y	OPTIMIZED 50/125 10GbE OM4 MULTIMODE 24 FIBER, MTP TO LC CASSETTE MODULE
FCZ-24-10Y	50/125 10GbE OM4 MULTIMODE 24 FIBER, MTP TO LC CASSETTE MODULE
FC6-24-10Y	62.5/125 MULTIMODE 24 FIBER, MTP TO LC CASSETTE MODULE
FC5-24-10Y	50/125 MULTIMODE 24 FIBER, MTP TO LC CASSETTE MODULE
FC9-24-10Y	9/125 SINGLEMODE 24 FIBER, MTP TO LC CASSETTE MODULE


**NOTES:**


1. SEE CURRENT CATALOG FOR PART NUMBER SUFFIXES TO INDICATE COLOR AND/OR PACKAGE QUANTITIES.
2. SEE CATALOG FOR COMPLETE LIST OF PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
3. MATERIALS:  
A. BOX AND LID: POWDER COATED ALUMINUM  
B. ADAPTER: COMPOSITE PLASTIC
4. CASSETTE MODULE WEIGHT: 7.25oz (205.6g)
5. DIMENSIONS IN BRACKETS ARE METRIC.



**PORT DESIGNATIONS**

AS VIEWED FROM THE FRONT  
WITH THE ADAPTERS REMOVED FOR CLARITY

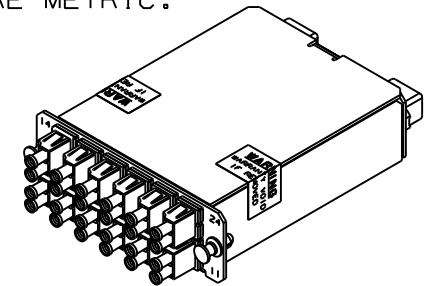

										FIBER OPTIC CASSETTE MODULE 24 FIBER MTP TO DUPLEX LC CONFIGURATION CUSTOMER DRAWING		
										 <b>PANDUIT</b> ™ CORP. TINLEY PARK, ILL 60477		
										ALL DIMENSIONS ARE GIVEN IN INCHES, UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.010 (0.3) (.XX) ±.03 (0.8) ANGLES		
										DRAWING FILENAME MO2068AA_DC/00G		
										SCALE NONE		
										PART NO. SEE TABLE		
										DRAWING NO. 02068-36		
										SIZE A		
02	09-17-09	EFK		RELEASED TO PRODUCTION	02068-36						DRAWN BY MC DATE 10/26/04 CHK'D MTV	THIRD ANGLE PROJECTION
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH			