

REV. 0

DCO 15961

TOLERANCES = ±.010


COIL: @ 25°C	RESISTANCE	27 OHMS ±10%
	NOMINAL VOLTAGE	5.0 VDC
	MUST OPERATE	2.7 VDC
	MUST RELEASE	1.65 VDC MAX, 0.29 VDC MIN.

ENVIRONMENT:

VIBRATION	10	CPS TO	3000	CPS @	30	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE & RELEASE 4 MS MAX.  
 CONTACT BOUNCE 2.0 MS MAX.  
 CONTACT STABILIZATION 2.0 MS MAX.  
 ALL OTHER REQUIREMENTS TO MIL-R-39016 LEVEL M

CUSTOMER DATA SHEET

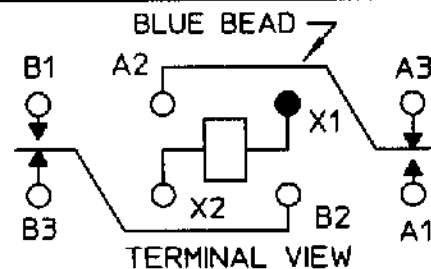

CONTACT RATING: LOW LEVEL TO 2A  
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 12/6/99 CK. SAH 12/6/99



CUST. QPL  
 CUST. NO. M39016/6-147M REV. ----

"HFW" RELAY

HFW1230L03M