




PRODUCT PARTNUMBER
10142333-1XXXXXL

PARTNO &
DATECODE


#AI IDENTIFIER

A PIN #1

B PIN #1

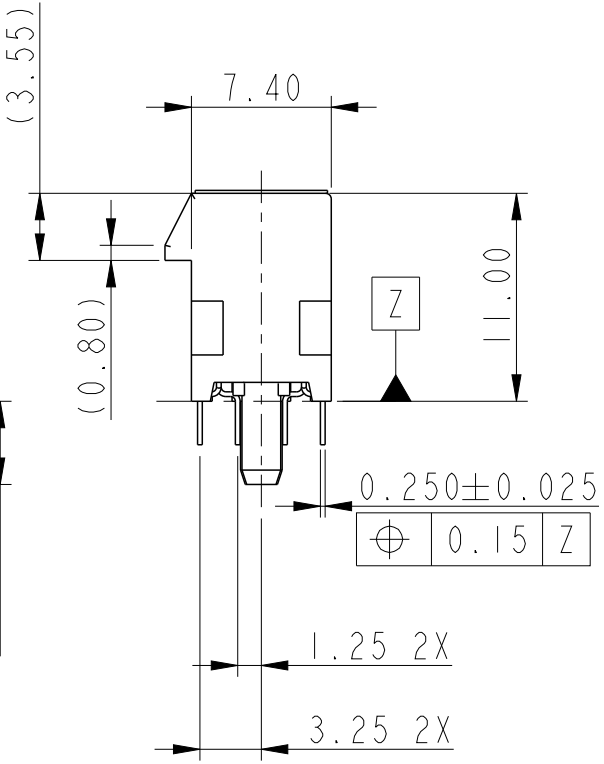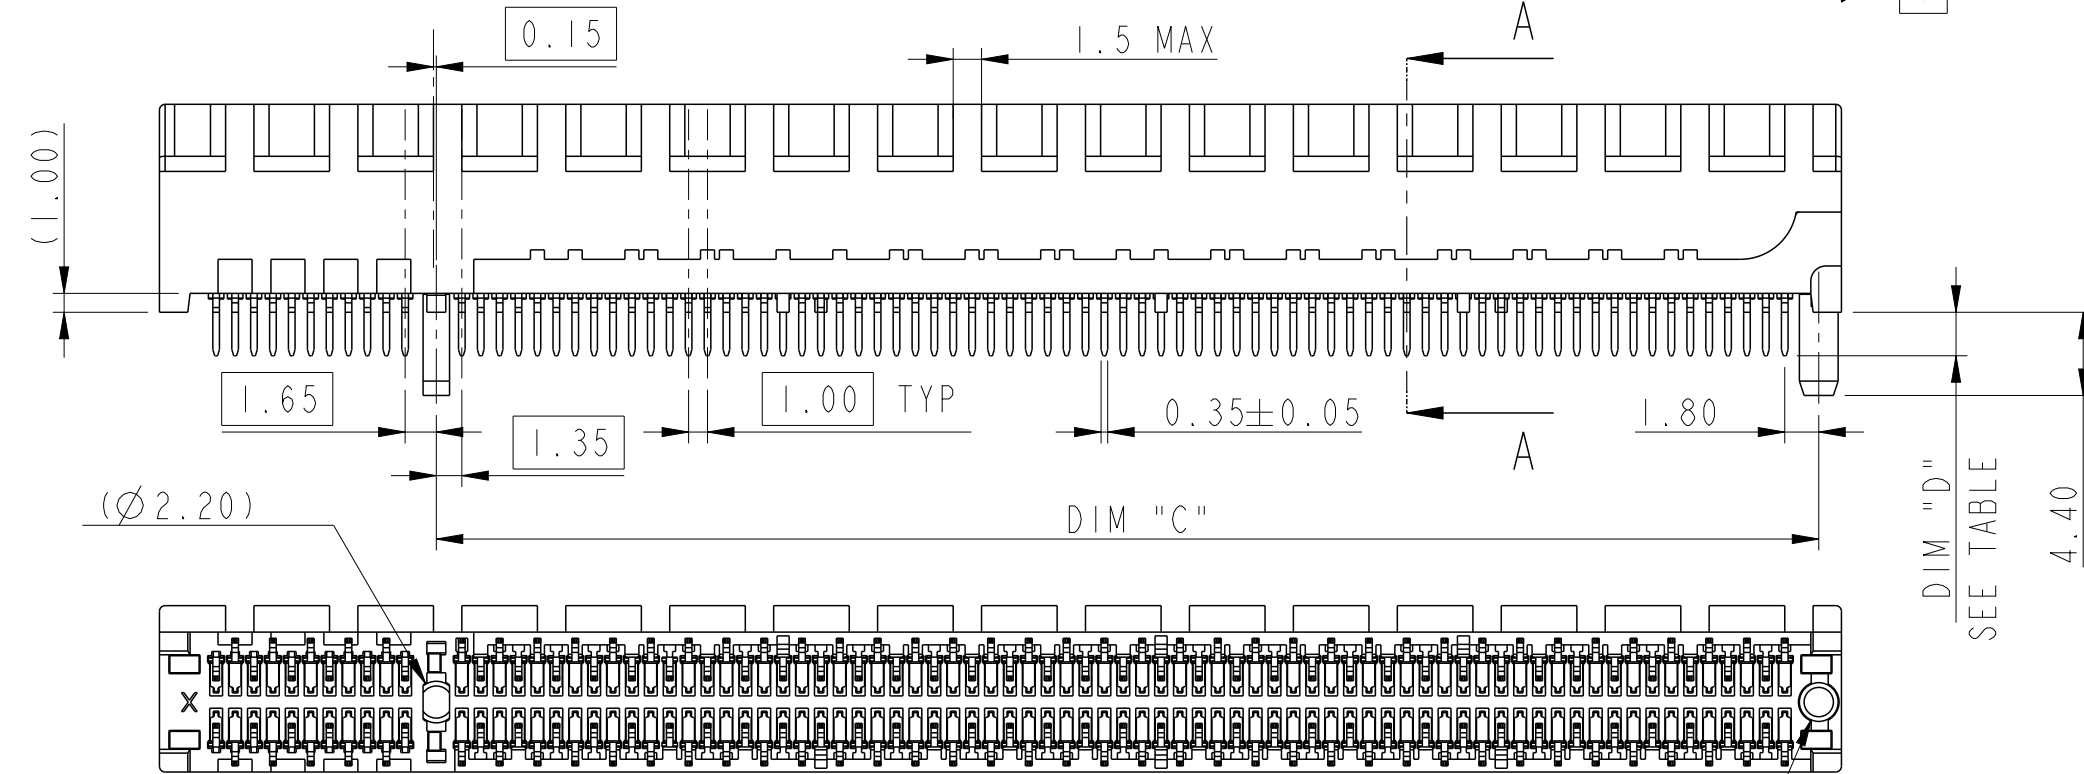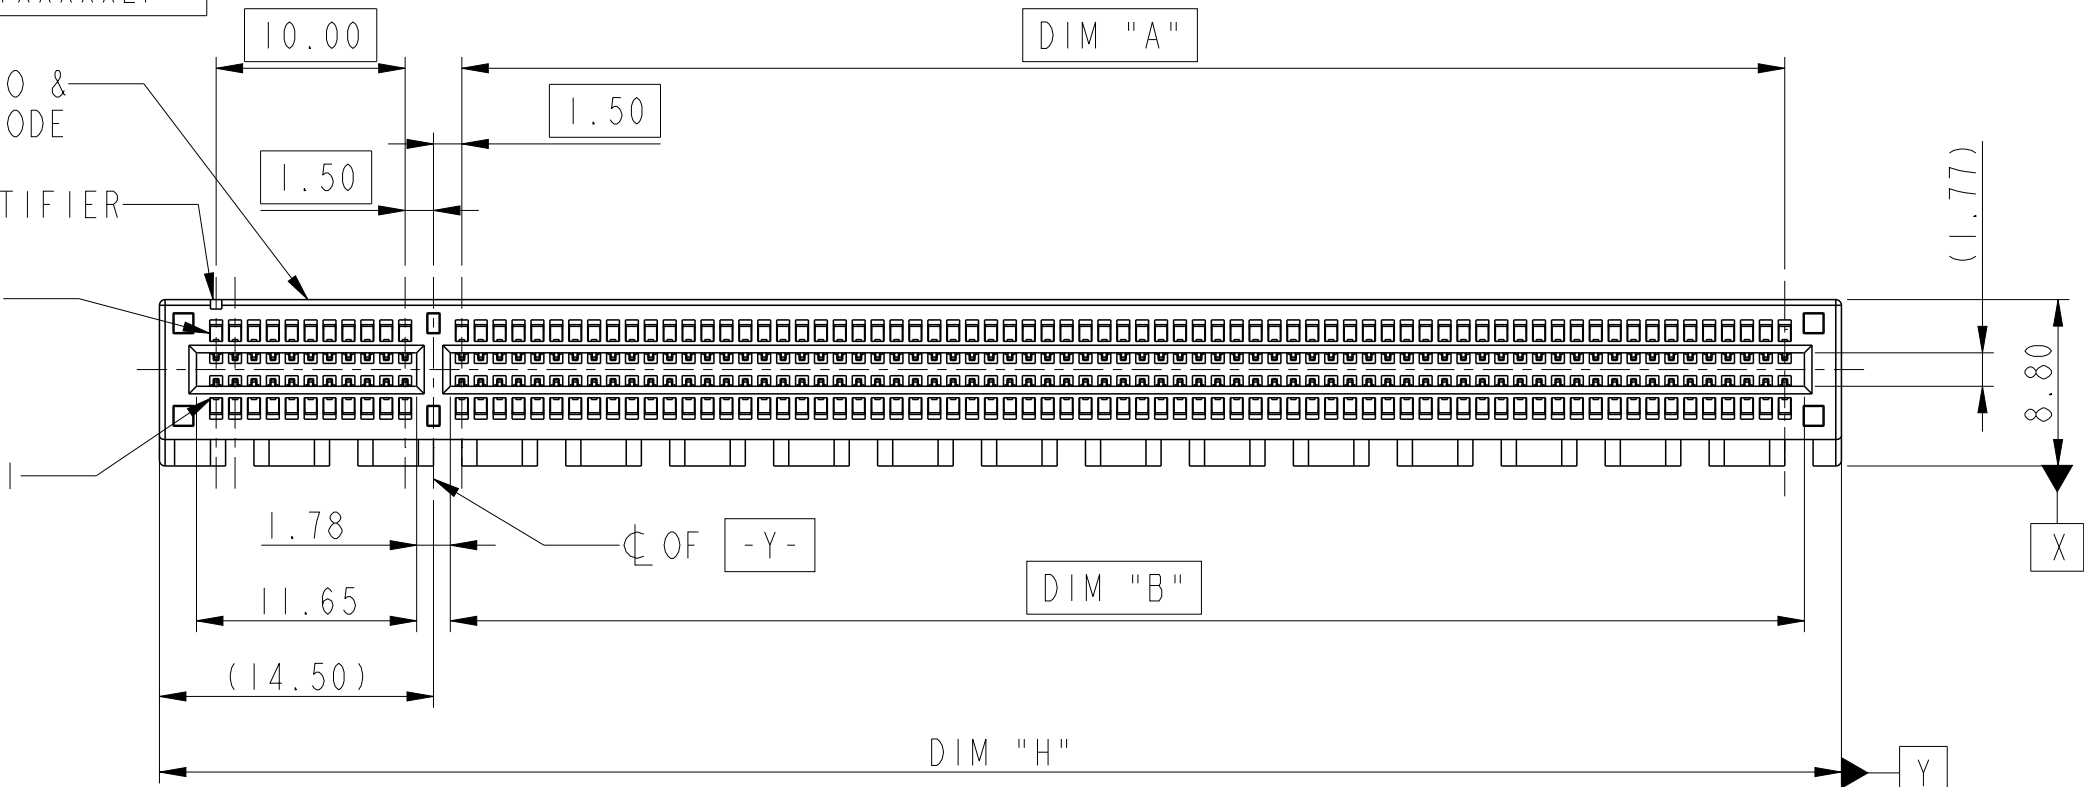



spec ref	-	dr	Cheong, Matthe	2017/09/18	projection	mm	size	A3	scale	1:1
tolerance std	ISO 406 ISO 1101	eng	Cheong, Matthe	2018/09/11			ecn no			ELX-S-31215-1
TOLERANCES UNLESS OTHERWISE SPECIFIED				chr	-		rel level			Released
surface	linear	0.X	±0.3	appr	Koon-Poh Tay	2018/09/24	product family			-
ISO 1302	angular	0°	±2°	Amphenol FCI			PCI EXPRESS 4.0			rev
							TH Type Ass'y			C
				cat. no.			-			Product - Customer Drw
							sheet 1 of 4			


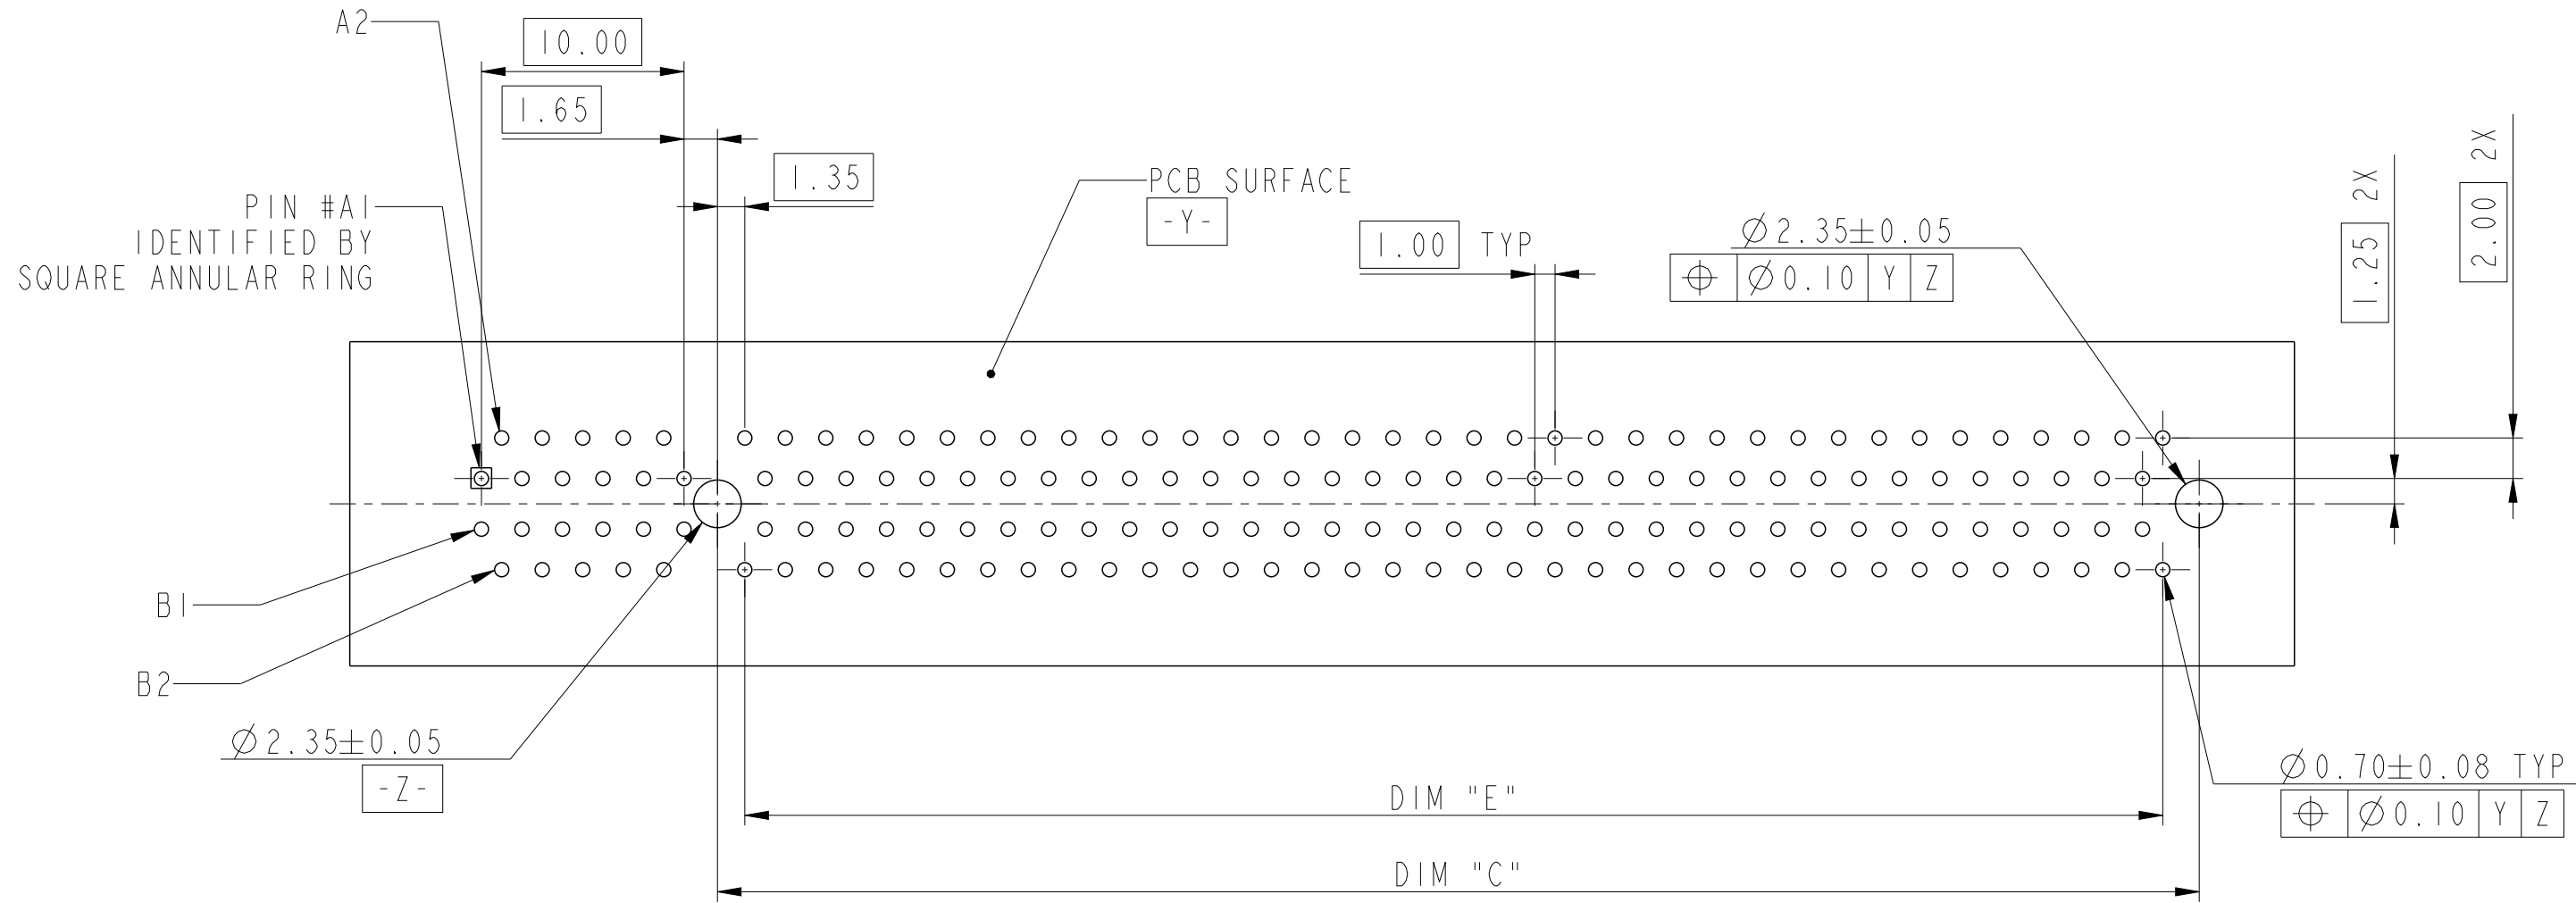


← I/O PANEL DIRECTION
RECOMMENDED PCB LAYOUT


DIMENSIONS					
POSITION	A	B	C	E	H
36	6.00	7.65	9.15	6.00	25.00
64	20.00	21.65	23.15	20.00	39.00
98	37.00	38.65	40.15	37.00	56.00
164	70.00	71.65	73.15	70.00	89.00

spec ref		-		dr	Cheong, Matthe	2017/09/18			size	A3	scale	1:1
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Cheong, Matthe	2018/09/11			ecn no ELX-S-31215-1			
				chr	-	-			rel level Released			
				appr	Koon-Poh Tay	2018/09/24			product family -			
surface  ISO 1302	linear	0.X	±0.3	Amphenol FCi	title PCI EXPRESS 4.0 TH Type Ass'y				dwg no 10142333	rev C		
		0.XX	±0.20									
		0.XXX	±0.1									
	angular	0°	±2°	cat. no.	-	Product - Customer Drw					sheet 2 of 4	




CONNECTOR LINK WIDTH	POSITION	N	DIM "G"	DIM "F"	PIN "L"
X1	36	6	8.15	6.00	B17
X4	64	20	22.15	20.00	B31
X8	98	37	39.15	37.00	B48
X16	164	70	72.15	70.00	B81

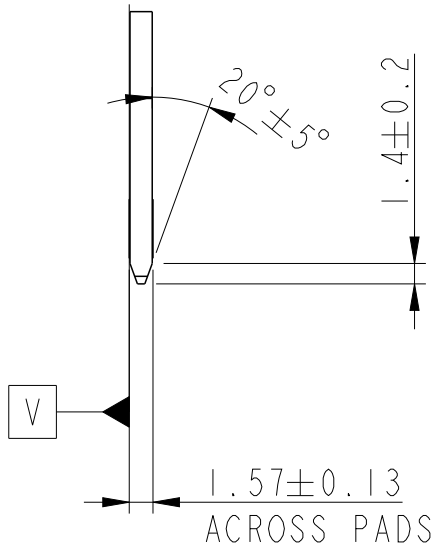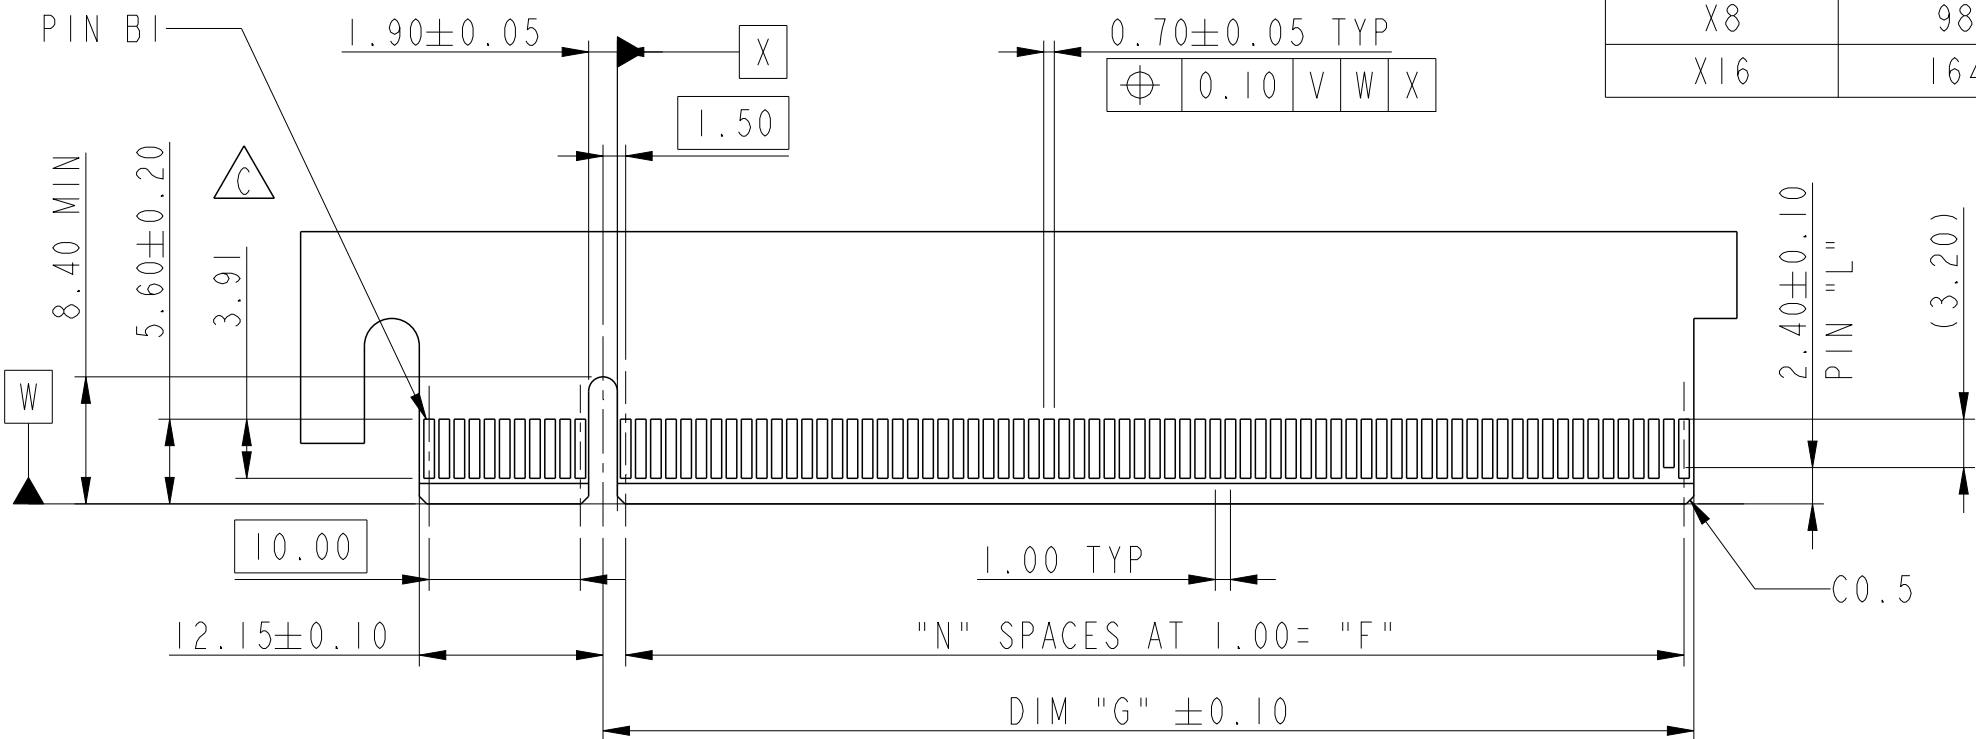

I/O PANEL DIRECTION
PRIMARY (COMPONENT) SIDE

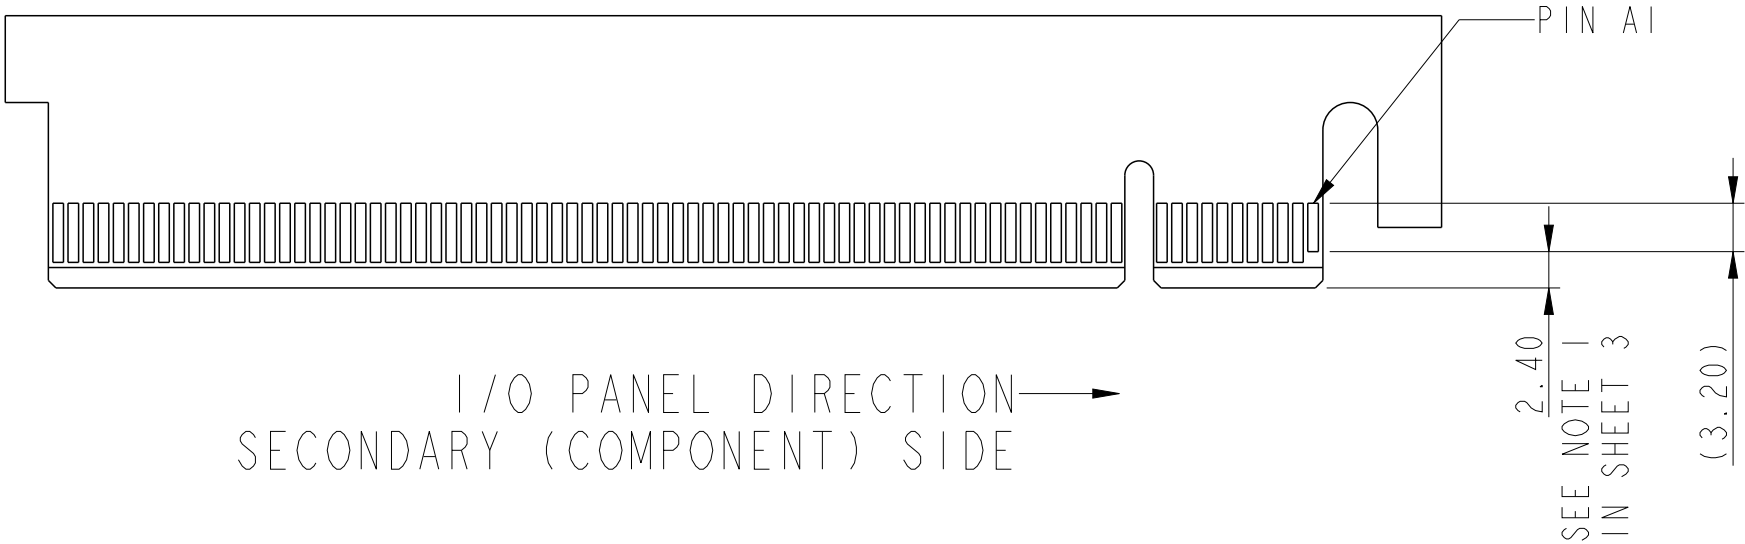

I/O PANEL DIRECTION
SECONDARY (COMPONENT) SIDE

spec ref		-		dr	Cheong, Matthe	2017/09/18	projection 	mm 	size	A3	scale	1:1
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Cheong, Matthe	2018/09/11			ecn no	ELX-S-31215-1		
				chr	-	-			rel level Released			
				appr	Koon-Poh Tay	2018/09/24	product family					-
surface  ISO 1302	linear	0.X	±0.3	Amphenol FCi	title PCI EXPRESS 4.0 TH Type Ass'y			dwg no 10142333	rev C			
		0.XX	±0.20									
		0.XXX	±0.1									
	angular	0°	±2°	cat. no.	-	Product - Customer Drw			sheet 3 of 4			

PRODUCT NUMBER CODE

10142333-□□□□□LF

HOUSING COLOUR OPTIONS

1: BLACK

PEGS OPTION

0: PLASTICS PEGS

CONTACT PLATING OPTIONS

0: 50u" Ni UNDERPLATE
30u" Au CONTACT AREA
100u" TIN TAIL AREA
1: 50u" Ni UNDERPLATE
15u" Au CONTACT AREA
100u" TIN TAIL AREA


PACKAGING

M: SOFT TRAY (DIM 317.5 x 235 x 18) WITH KAPTON TAPE, 22MM
Q: HARD TRAY (DIM 323 x 136 x 19) (164 POS)



NO. OF POSITION


0: 36 POS
1: 64 POS
2: 98 POS
3: 164 POS

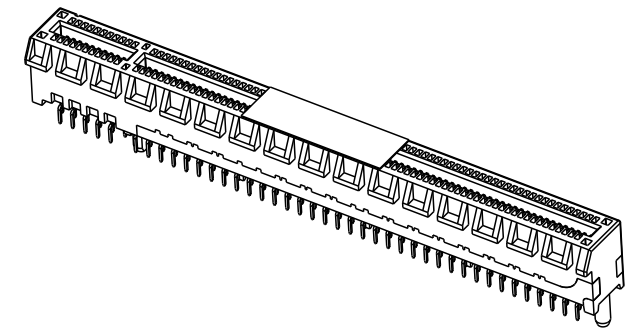

TAIL LENGTH OPTION



	DIM "D"	PCB THICKNESS
0	2.30	1.56
1	3.10	2.36
2	2.54	1.56
3	1.90	1.56

POSITION OF KAPTON TAPE

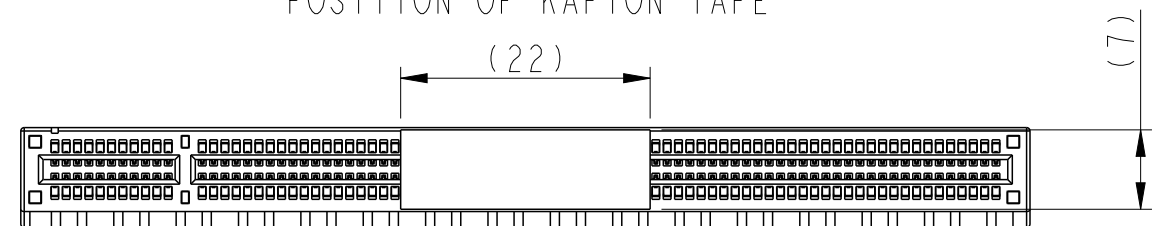

NOTES:

- MATERIAL:
HOUSING: HIGH PERFORMANCE RESIN, UL94V-0
CONTACT: COPPER ALLOY
- PLATING:
SEE TABLE
- PRODUCT SPECIFICATION: GS-12-1406
- PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRIES REGULATIONS AS DESCRIBED IN GS-22-008
- DIMENSION APPLIES TO THE TIP OF TERMINAL.
- DATE CODE B PRINTED ON THIS SURFACE.
DATE CODE "MMDDYYL", MMDDYY IS ASSEMBLY DATE.
L IS AFCI PRODUCTION SITE.
- "M" DENOTES MALAYSIA
- THE HOUSING WITH WITHSTAND EXPOSURE TO 260°
PEAK TEMPERATURE FOR 10SECONDS IN A
CONVECTION, INFRA-RED OR VAPOR PHASE
REFLOW OVEN

spec ref -				dr	Cheong, Matthe	2017/09/18	projection 	mm 	size	A3	scale	1:1
tolerance std ISO 406 ISO 1101	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Cheong, Matthe	2018/09/11			ecn no	ELX-S-31215-1		
				chr	-	-						
				appr	Koon-Poh Tay	2018/09/24	product family -			rel level	Released	
surface ISO 1302	linear	0.X	±0.3	Amphenol FCi	title PCI EXPRESS 4.0 TH Type Ass'y			dwg no	10142333			rev C
		0.XX	±0.20									
		0.XXX	±0.1									
	angular	0°	±2°		cat. no. -				Product - Customer Drw			