

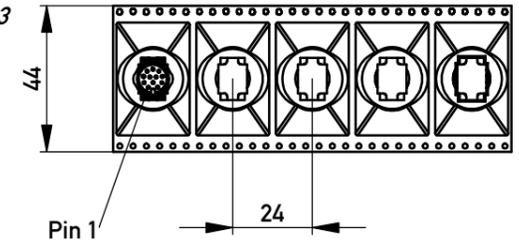
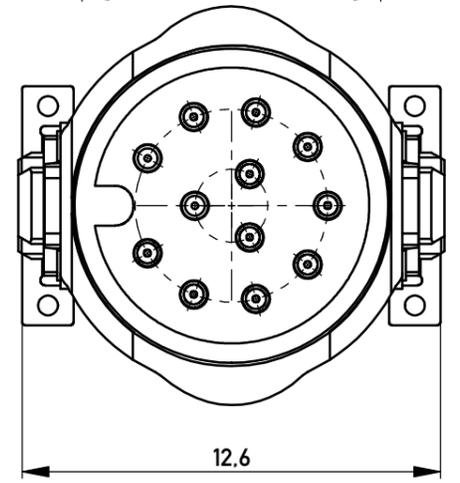
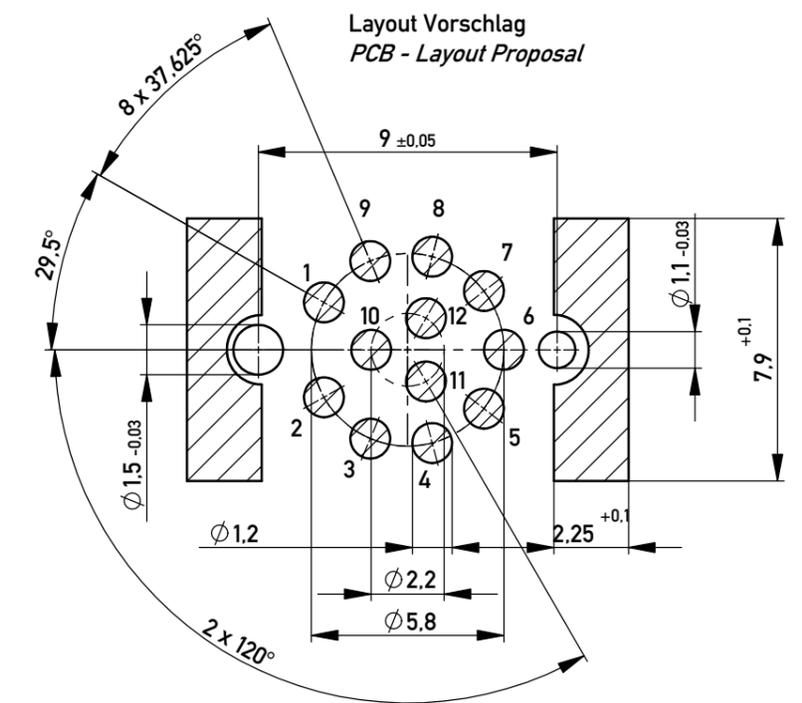

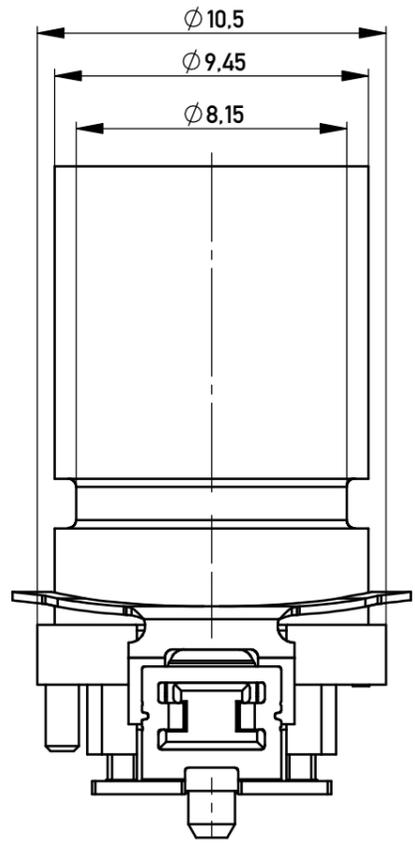


Verpackt im Gurt in Anlehnung an DIN IEC 60286-3
 tape on reel packaging according to DIN IEC 60286-3
 Verpackungseinheit: 75 Stück
 packaging unit: 75 pcs

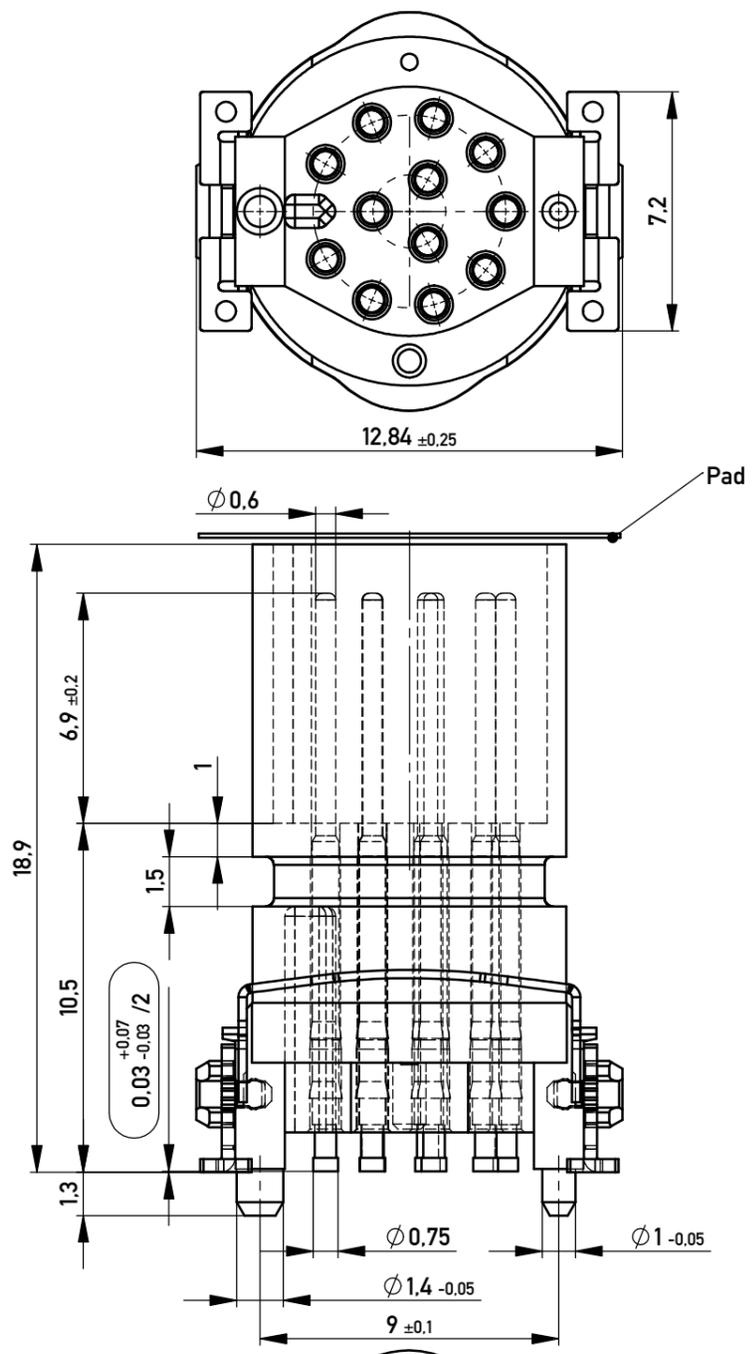

Abspulrichtung - Reel off direction

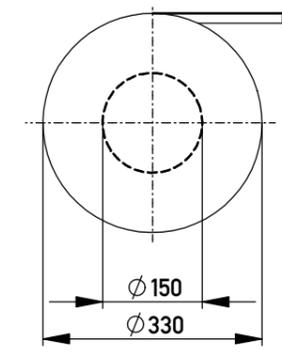

- SPC-Maß: Prüfmerkmale der Kategorie /1
 /1 Für SPC-Maße muss eine x/s Regelkarte geführt werden mit Nachweis der Prozessfähigkeit in der Serie (Cpk) oder 100% - Prüfung
- Prüfmerkmal: Prüfmerkmale der Kategorie /2 und /3
 /2 Für Prüfmerkmale muss eine x/s Regelkarte geführt werden
 /3 Prüfmerkmale werden serienbegleitend geprüft
- Inspection level 1: control chart required
 /1 Proof of process capability or 100% test if process capability is not achieved
- Inspection level 2 and 3: control chart required
 /2 Proof of mean value, standard deviation and machine capability
 /3 Proof of values or proof of attributive test

Haltekraft Kontakt >20N
 retention force contact >20N
 Koplanarität aller Kontakte und Clip <=0.1mm
 coplarity of contacts and clips <=0.1mm

494518	12 Pol A Cod.	Gutverpackung 75 St. mit Pad Tape on Reel 75 pcs with Pad
454643	12 Pol A Cod.	Gutverpackung 75 St. Tape on Reel 75 pcs
part no.	Typ / type	Bemerkung / remark

Information:	Tolerances	Scale 5:1
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	All Dimensions in mm	Designation
Subject to modification without prior notice. Drawing will not be updated.	www.ERNI.com	male connector M12 12 pole A Cod SMD 10,5 mm
a	25.10.2016	454642
Index	Date	Class M12
		A3

Copyright by ERNI GmbH
 Proprietary notice pursuant to ISO 16016 to be observed.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[454643](#) [494518](#)