



SIDE VIEW

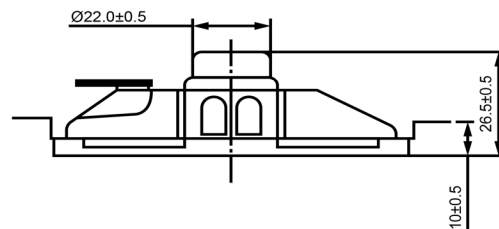

BOTTOM VIEW

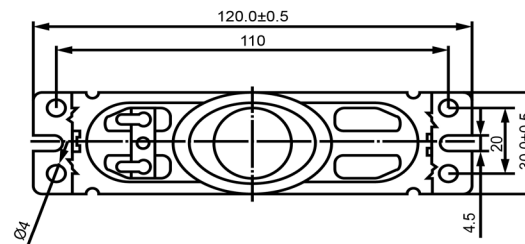

| Specifications        |             |       | Notes                                                                               | Revision History |                           |            |             |             |            |
|-----------------------|-------------|-------|-------------------------------------------------------------------------------------|------------------|---------------------------|------------|-------------|-------------|------------|
| Description           | Value       | Unit  |                                                                                     | Version          | Description               |            |             | Date        | Approved   |
| Shape                 | Rectangle   |       | 1) All dimensions are in mm unless otherwise noted<br>2) All parts meet RoHS        | 1                | Released from Engineering |            |             | 10/21/2013  | J.S        |
| Resonant Frequency    | 320         | (Hz)  |                                                                                     |                  |                           |            |             |             |            |
| Frequency Range       | 320 ~ 7,000 | (Hz)  |                                                                                     |                  |                           |            |             |             |            |
| SPL @ 10cm            | 84          | (dBA) |                                                                                     |                  |                           |            |             |             |            |
| Impedance             | 8           | (Ohm) |                                                                                     |                  |                           |            |             |             |            |
| Cone Material         | Paper       |       |                                                                                     |                  |                           |            |             |             |            |
| Nominal Power         | 5           | (W)   |                                                                                     |                  |                           |            |             |             |            |
| Max Power             | 8           | (W)   |                                                                                     |                  |                           |            |             |             |            |
| Mount Type            | Frame       |       |                                                                                     |                  |                           |            |             |             |            |
| Operating Temperature | -25 ~ +55   | °C    |                                                                                     |                  |                           |            |             |             |            |
| Storage Temperature   | -25 ~ +55   | °C    |  | Drawn by         | Date                      | Checked by | Date        | Approved by | Date       |
| Weight                | 41          | (g)   |                                                                                     | A.B.             | 10/21/2013                | C.E.       | 10/21/2013  | J.S         | 10/21/2013 |
|                       |             |       | DB UNLIMITED                                                                        | Dynamic Speaker  |                           |            | SP1200308-1 |             |            |