

| SPECIFICATIONS | | | | | |
|-----------------------------|--------------|-------|--|--|--|
| PARAMETERS | VALUES | UNITS | | | |
| RATED INPUT POWER | 4 | W | | | |
| MAX INPUT POWER | 5 | W | | | |
| IMPEDANCE | 8 ± 15% | OHM | | | |
| OUTPUT SPL @ 1W/0.5M | 05 + 2 | dBA | | | |
| (AT 1.0, 1.4, 1.7, 2.0 kHz) | 95 ± 3 | | | | |
| DISTORTION (MAX.) | 5% | - | | | |
| RESONANT FREQUENCY | 230 ± 20% | Hz | | | |
| FREQUENCY RANGE | 230 ~ 12,000 | Hz | | | |
| HOUSING MATERIAL | METAL | - | | | |
| CONE MATERIAL | PAPER | _ | | | |
| MAGNET MATERIAL | FERRITE | _ | | | |
| OPERATING TEMPERATURE | -20 ~ +50 | °C | | | |
| WEIGHT | 204 | grams | | | |

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

| REVISION HISTORY | | | | | | | |
|------------------|--|-----------|----------|--|--|--|--|
| LTR | DESCRIPTION | DATE | APPROVED | | | | |
| _ | RELEASED FROM ENGINEERING | 9/12/2005 | | | | | |
| Α | REVISED TO INVENTOR 3-D DRAWING TEMPLATE | 1/19/2009 | B.R. | | | | |
| В | REVISED HOLE TO HOLE DIMENSION | 9/13/2013 | M.L. | | | | |
| С | REVISED ROHS STATUS | 9/13/2013 | M.L. | | | | |

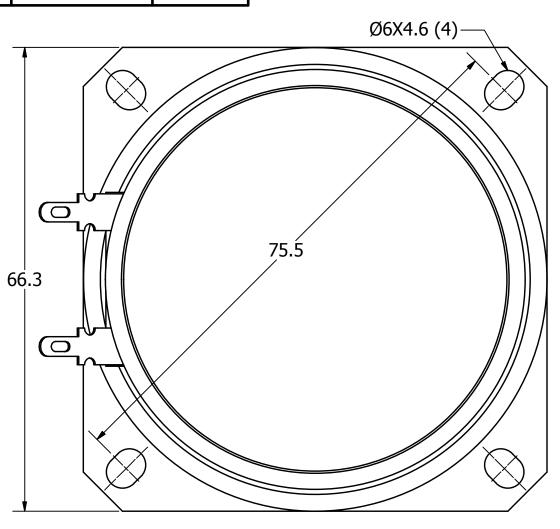

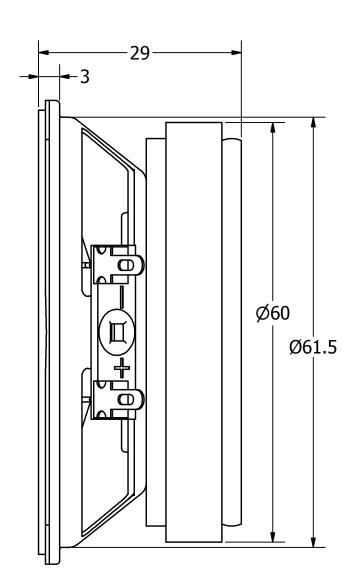



NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2011/65/EU COMPLIANT.

| | UNLESS OTHERWISE SPECIFIED: |
|----------|---|
| SIZE | DIMENSIONS ARE IN MILLIMETERS. |
| A3 | TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. |
| DS D idw | AS06608F |

| | | , | Date | Approved by | Date | Drawn Date |
|--------|-----------|------|-----------|-------------|-----------|------------|
| J.A.F. | 9/12/2005 | B.R. | 9/12/2005 | E.P. | 9/12/2005 | 1/19/2009 |



AS06608PS-R

Speaker

Sheet - 1 / 1