

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20



© COPYRIGHT 20

BY -




ALL RIGHTS RESERVED.

REVISIONS


| P | LTR | DESCRIPTION     | DATE      | DWN | APVD |
|---|-----|-----------------|-----------|-----|------|
|   | A   | INITIAL RELEASE | 30AUG2017 | YC  | CW   |
|   |     |                 |           |     |      |
|   |     |                 |           |     |      |
|   |     |                 |           |     |      |

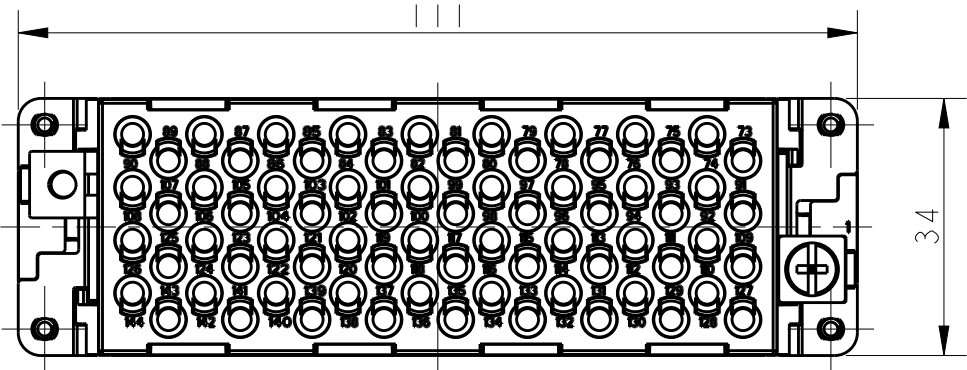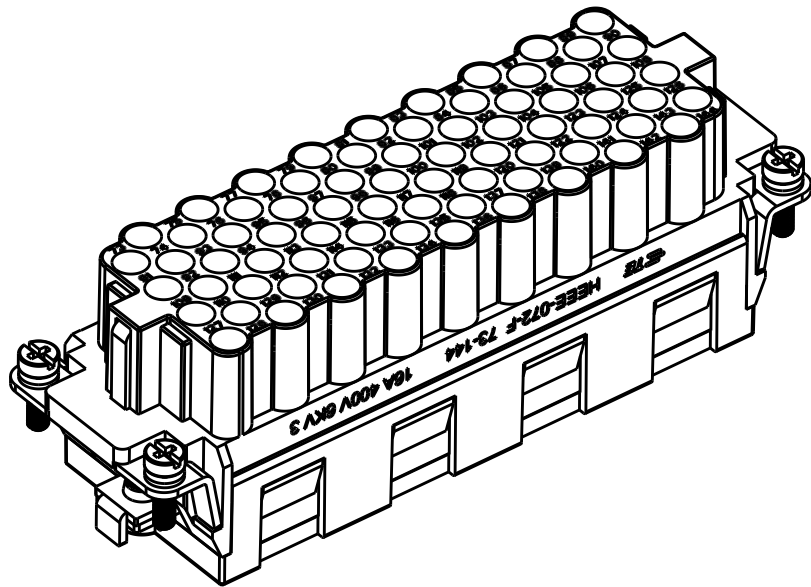

M4 SCREW, RECOMMENDED  
TIGHTENING TORQUE 1.2N.m  
M4 螺丝, 推荐拧紧力矩1.2N.m

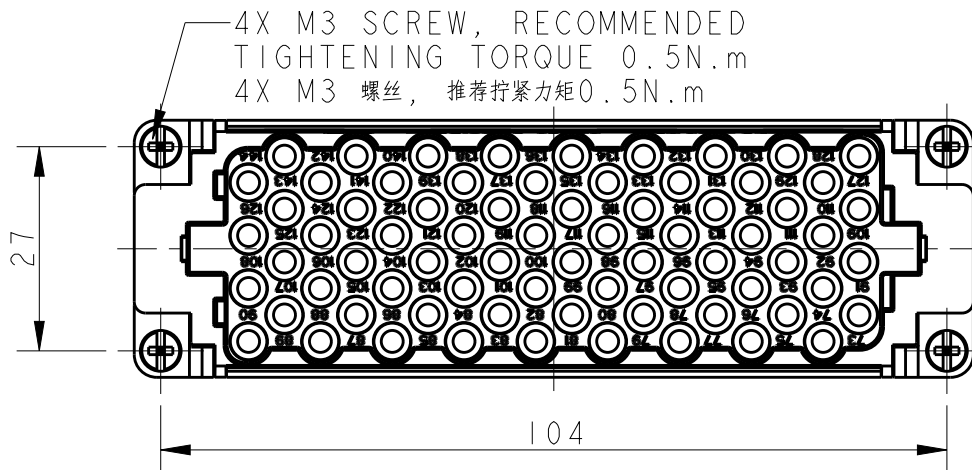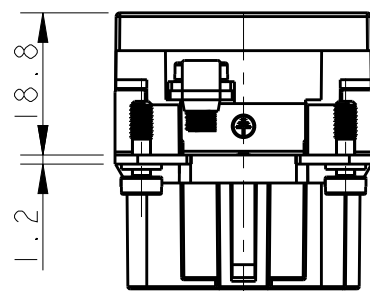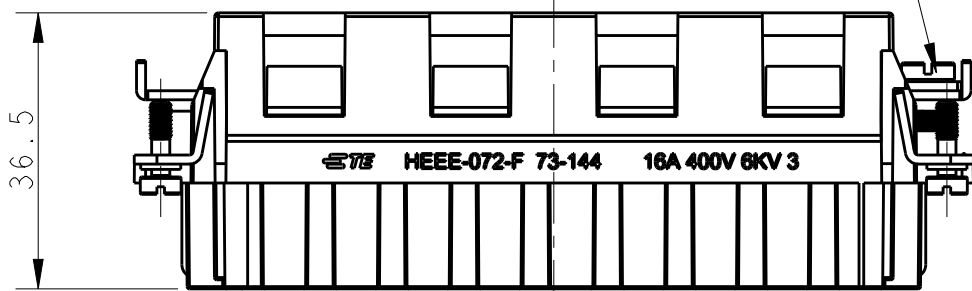

4X M3 SCREW, RECOMMENDED  
TIGHTENING TORQUE 0.5N.m  
4X M3 螺丝, 推荐拧紧力矩0.5N.m

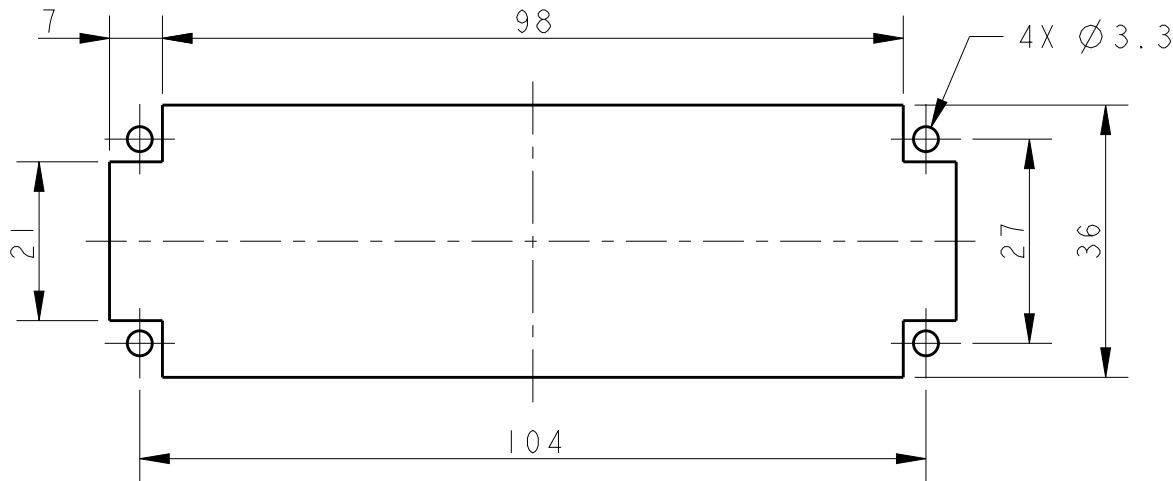

PANEL CUT FOR INSERTS FOR USE  
WITHOUT HOODS/ HOUSINGS  
不使用防护外壳时芯件安装平面开孔图

NOTES:

- TECHNICAL CHARACTERISTICS:  
INSULATION MATERIAL: PC  
RATED VOLTAGE: 400V  
RATED CURRENT: 16A  
INSULATION RESISTANCE:  $\geq 400M\Omega$   
RATED IMPULSE VOLTAGE: 6KV  
POLLUTION DEGREE: 3  
FLAMMABILITY: UL94V-0  
MATING CYCLES: 500 CYCLES  
WIRE RANGE:  $0.14mm^2 \sim 4mm^2$  (AWG26-AWG12)  
CONTACT TYPE: CRIMP CONTACT
- CONTACTS NEED TO BE ORDERED SEPARATELY.  
(ORDER No. REFER TO DRAWING: T20300X20XX000)

注释:

- 技术参数:  
绝缘材料: PC  
额定电压: 400V  
额定电流: 16A  
绝缘电阻:  $\geq 400M\Omega$   
脉冲电压: 6KV  
污染等级: 3  
阻燃等级: UL94V-0  
插拔次数: 500次  
接线范围:  $0.14mm^2 \sim 4mm^2$  (AWG26-AWG12)  
接线类型: 冷压接
- 端子需要单独订购.  
(订货号参考图面: T20300X20XX000)

|                   |                          |                                                     |
|-------------------|--------------------------|-----------------------------------------------------|
| T2051442201-007   | HEEE-072-F<br>73-144     | HEEE-072 FEMALE INSERT 73-144<br>HEEE-072 母插 73-144 |
| PART NUMBER<br>料号 | PART DESCRIPTION<br>产品描述 |                                                     |

|                                                                 |  |                                 |                                                                                                       |                    |                              |
|-----------------------------------------------------------------|--|---------------------------------|-------------------------------------------------------------------------------------------------------|--------------------|------------------------------|
| THIS DRAWING IS A CONTROLLED DOCUMENT.                          |  | DWN<br>YORK CHEN<br>30AUG2017   |  TE Connectivity |                    |                              |
| DIMENSIONS:<br>mm                                               |  | CHK<br>GINO YAO<br>30AUG2017    |                                                                                                       |                    |                              |
| TOLERANCES UNLESS OTHERWISE SPECIFIED:                          |  | APVD<br>CHRIS WANG<br>30AUG2017 |                                                                                                       |                    |                              |
| 0 PLC ±<br>1 PLC ±<br>2 PLC ±<br>3 PLC ±<br>4 PLC ±<br>ANGLES ± |  | PRODUCT SPEC<br>108-137068      |                                                                                                       |                    |                              |
| MATERIAL<br>-                                                   |  | APPLICATION SPEC<br>114-137068  | NAME<br>HEEE-072-F 73-144                                                                             |                    |                              |
| FINISH<br>-                                                     |  | WEIGHT<br>-                     | SIZE<br>A3                                                                                            | CAGE CODE<br>00779 | DRAWING NO<br>T2051442201007 |
| CUSTOMER DRAWING                                                |  | SCALE<br>1:1                    | SHEET<br>1                                                                                            | OF<br>1            | REV<br>A                     |