



LOC		DIST		REVISIONS					
FX		00		P	LTR	DESCRIPTION	DATE	DWN	APVD
				D		REVISED PER ECO-09-011983	19MAY2009	DLD	WTW


KEYING OPTIONS
SCALE 2:1

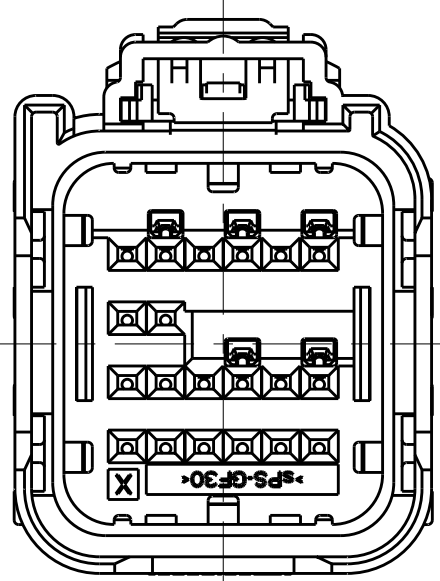


OPTION "A"

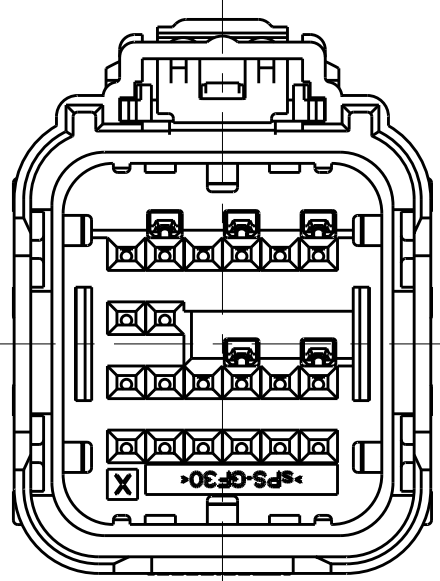


OPTION "B"

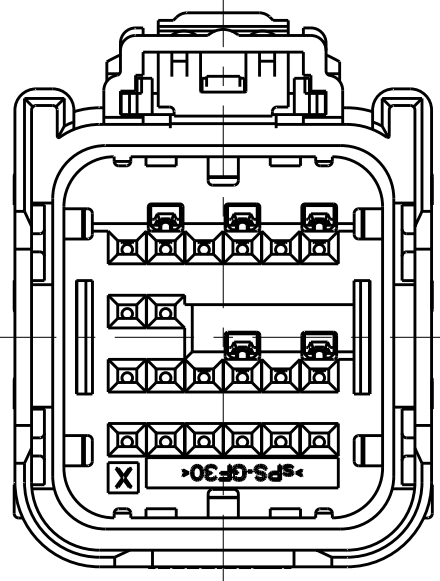


OPTION "C"

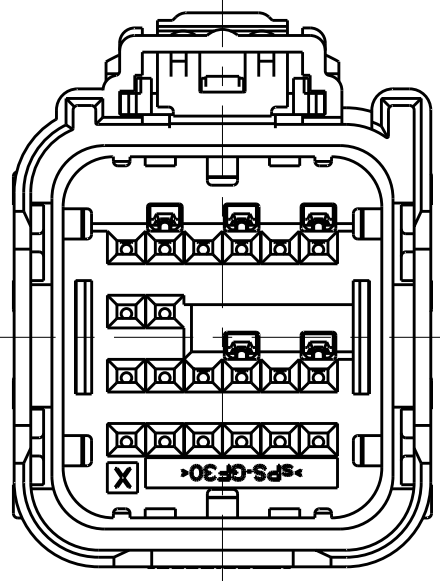



OPTION "D"

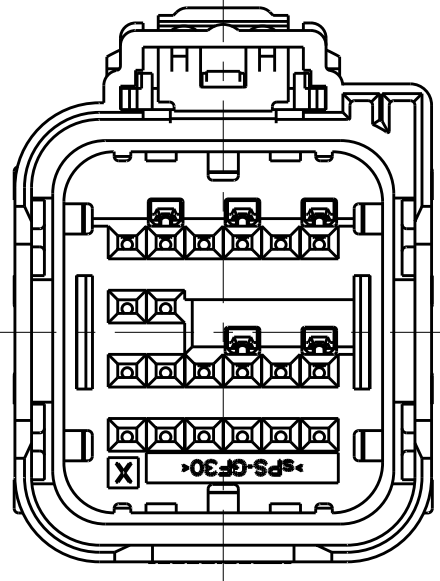

OPTION "E"

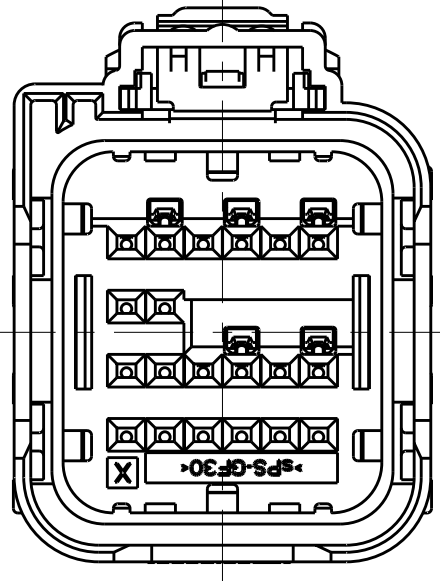



OPTION "F"

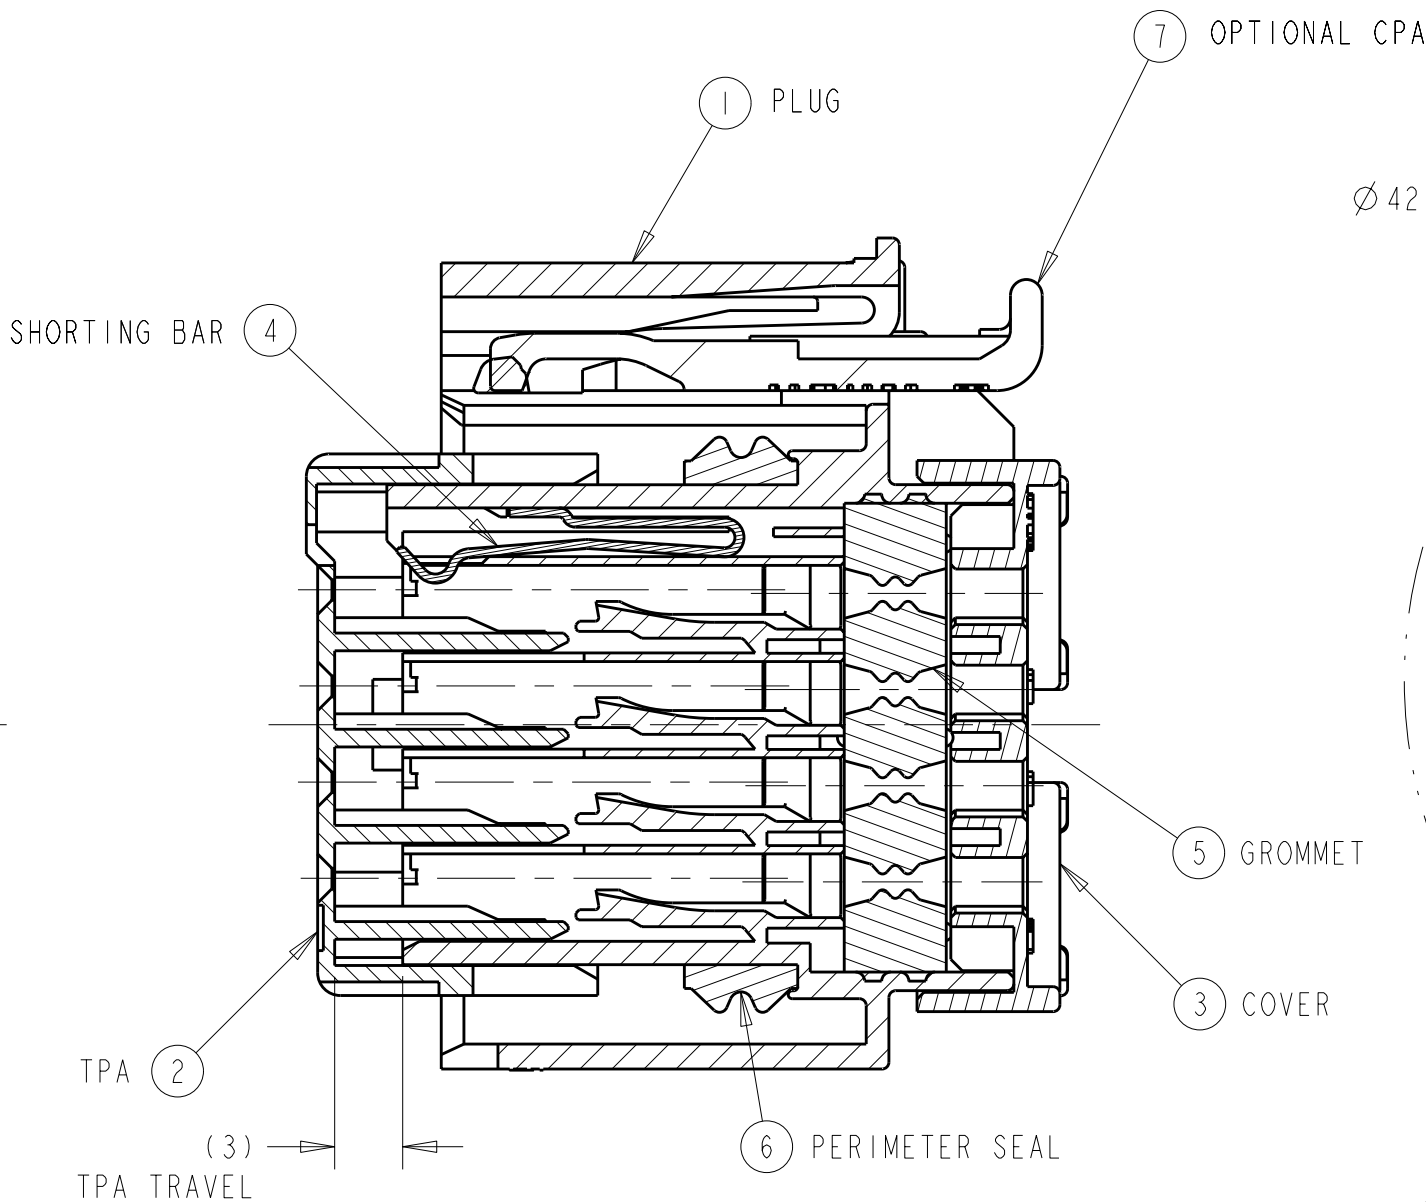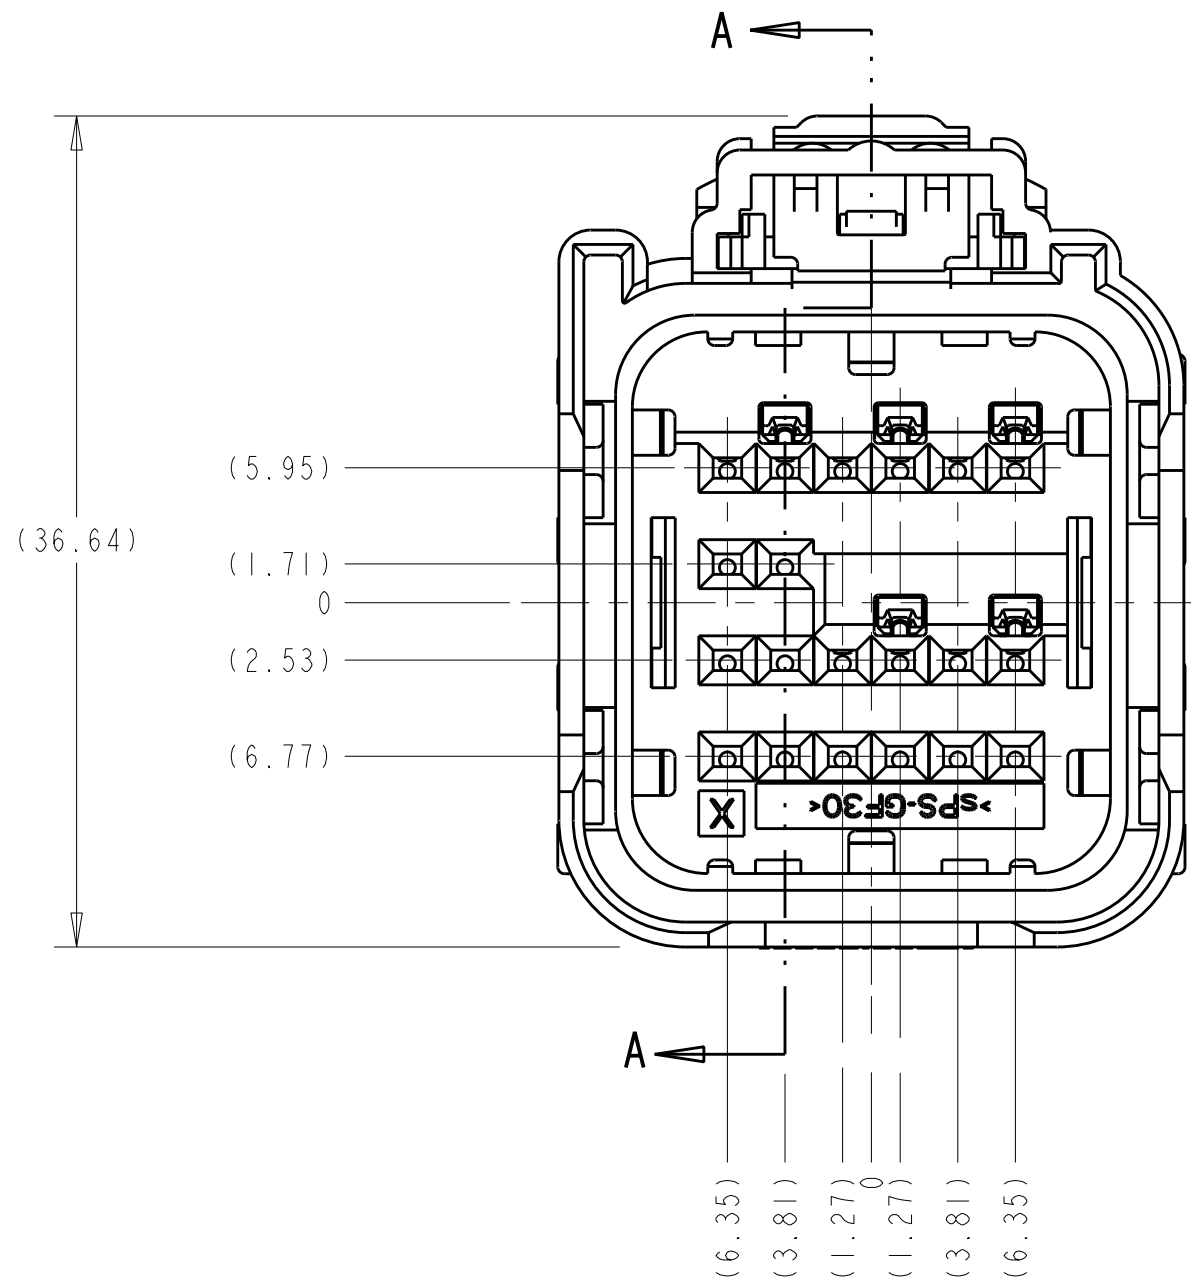


SECTION A-A
SHOWN WITH TPA IN
IT'S PRE-LOADED POSITION
(DELIVERY CONDITON)

MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND


MINIMUM FEED THROUGH CONDITION
WITH 1mm CLEARANCE ALL AROUND
SHOWN WITH OPTION WIRESHIELD

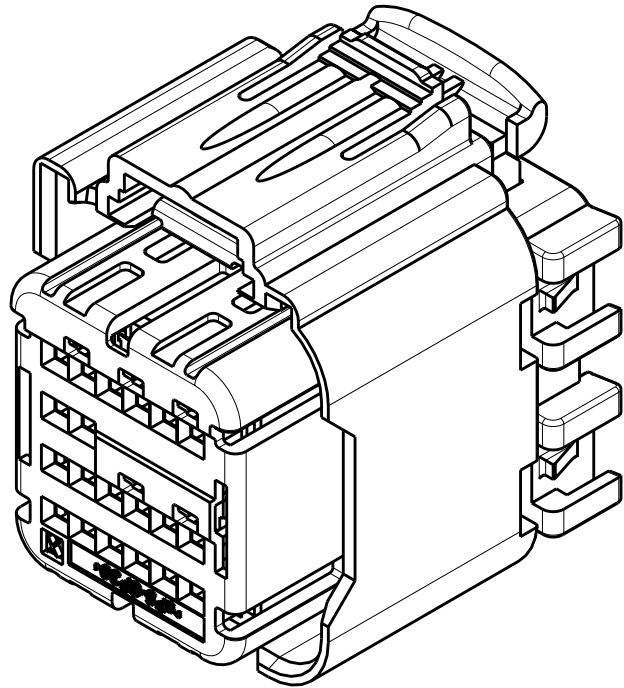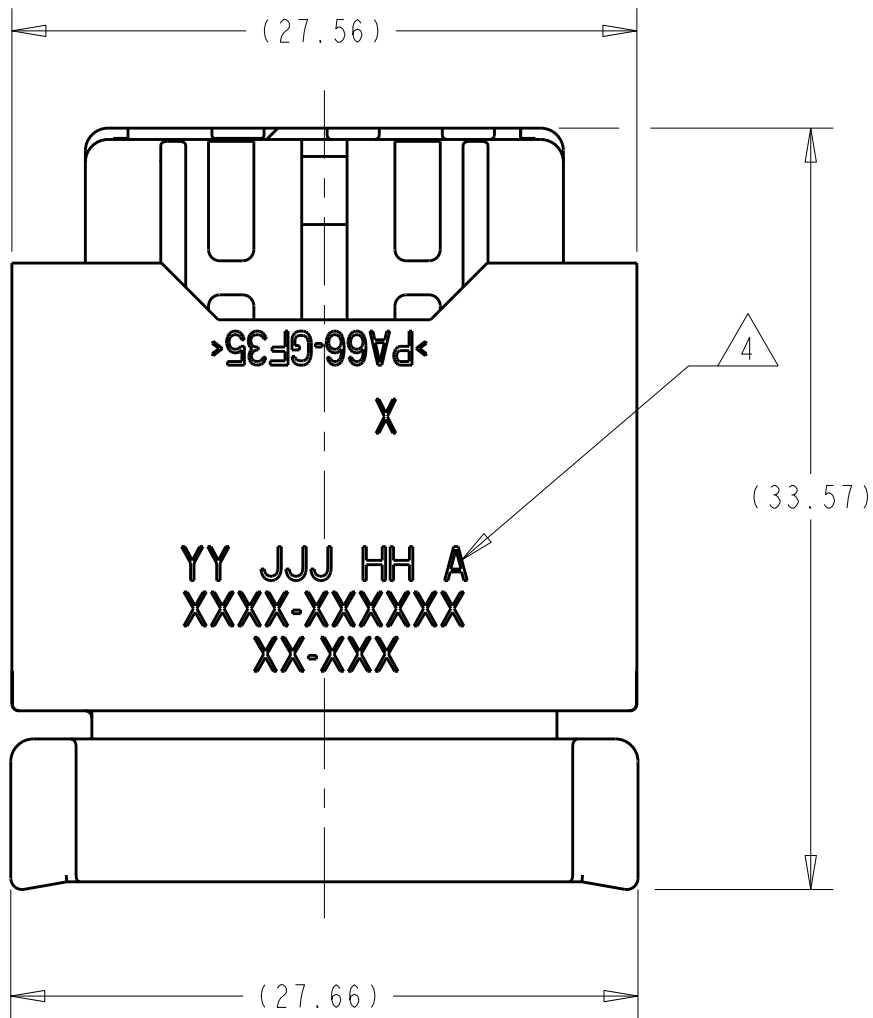

SCALE 2:1

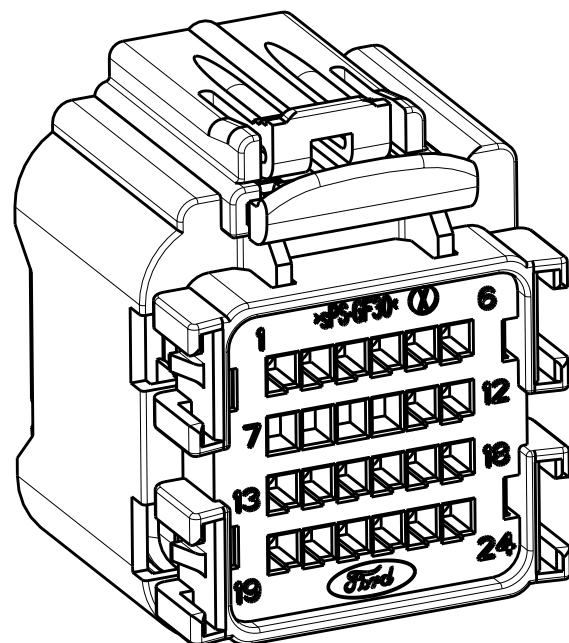

SCALE 2:1

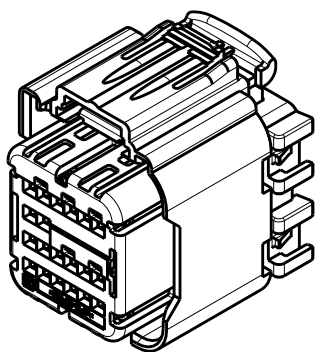

SCALE 1:1

KEYING OPTION "A" SHOWN

		ITEM		DESCRIPTION		MATERIAL		FINISH/COLOR	
				CPA		PBT-GF15		RED	
				PERIMETER SEAL		SILICONE		GREEN	
				GROMMET		SILICONE		BROWN	
				SHORTING BAR		S.S.		SEE COMPONENT DRAWING	
				COVER		PA66 35% GF		BLACK	
				SPACER FOR SHORTING BAR APPLICATIONS		sPS 30% GF		NATURAL	
				PLUG WITH KEYING OPTION "D" AND 5 SHORTING BAR POSITIONS CONFIGURATION		PA66 35% GF		BLACK	
				PLUG WITH KEYING OPTION "C" AND 5 SHORTING BAR POSITIONS CONFIGURATION		PA66 35% GF		BLACK	
				PLUG WITH KEYING OPTION "B" AND 5 SHORTING BAR POSITIONS CONFIGURATION		PA66 35% GF		BLACK	
				PLUG WITH KEYING OPTION "A" AND 5 SHORTING BAR POSITIONS CONFIGURATION		PA66 35% GF		BLACK	

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN		23JUL2007		Tyco Electronics		Tyco Electronics Harrisburg, PA 17105-3608	
mm		0 PLC ±.3		CHK		W. VESTAL		NAME		24 WAY ARM PLUG ASSEMBLY WITH SHORTING BARS CUSTOMER SPEC.	
		1 PLC ±0.10		APVD		W. WELLINSKY		PRODUCT SPEC		SIZE	
		2 PLC ±.3						APPLICATION SPEC		CAGE CODE	
		3 PLC ±.3						WEIGHT		DRAWING NO	
		4 PLC ±.3						SEE NOTE 5		A1 00779	
		5 PLC ±.3						CUSTOMER DRAWING		SCALE	
		6 PLC ±.3								SHEET	
		7 PLC ±.3								OF	
		8 PLC ±.3								REV	
		9 PLC ±.3								D	

