

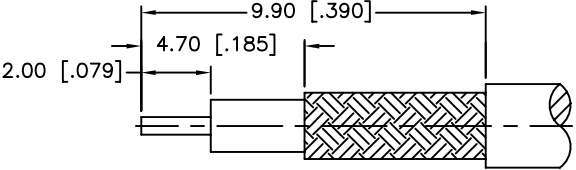
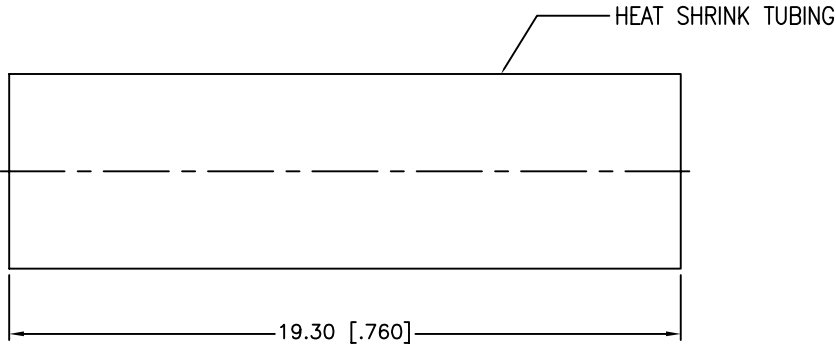
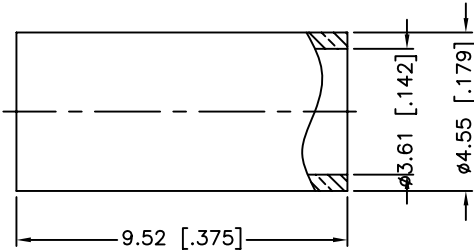


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/17/09	XXXXXX	INITIAL RELEASE

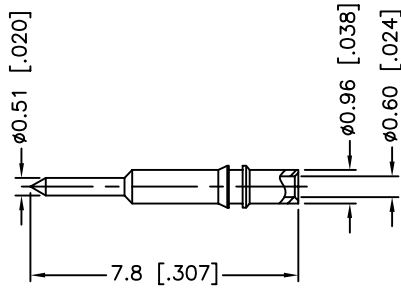

RECOMMENDED
CABLE STRIPPING DIM'S

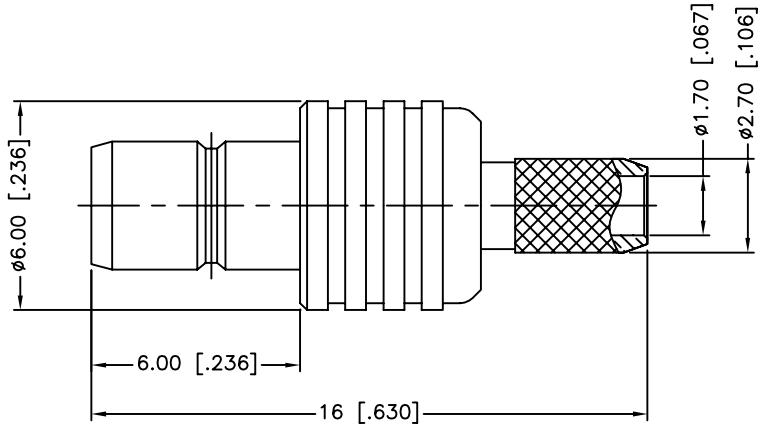

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

9				1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8				1		DRAWN	C.WANG							12/17/09	
7	HEAT SHRINK TUBING		BLACK	1		CHECKED									
6	FERRULE	COPPER	GOLD	1		ISSUED			PART DESCRIPTION SMB CRIMP JACK (FOR RG-316U/D)						
5	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1								
4	BARREL	BRASS	GOLD	1					PART NO. 142190						
3	INSULATOR	PTFE	NATURAL	1		CAD FILE C:/CONNEX/142190.DWG									
2	INSULATOR	PTFE	NATURAL	1					DWG. NO. 142190.DWG				REV. NC	SIZE A	SCALE NA
1	BODY	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY											