

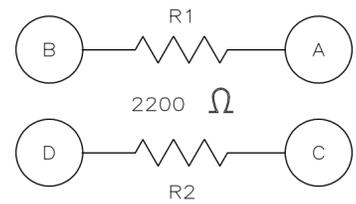


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT - By -		ALL RIGHTS RESERVED.	
DESCRIPTION	MATERIAL	FINISH	
MODULE ASSEMBLY	D.A.P. PER MIL-M14 TYPE SDG-F	COLOR: GREEN	
GROMMET	FLOURSILICONE RUBBER 70/30 BLEND	COLOR: GREEN	
CONTACT SOCKET	BERYLLIUM COPPER ASTM-B194	GOLD PLATE PER MIL-G-45204	
RETAINING CLIP	BERYLLIUM COPPER ASTM-B194 OR STAINLESS STEEL PER QQ-S-766	NONE	
RESISTOR	RLR07C2201JS	NONE	
SEALING PLUGS QTY 2	F.E.P. PER MIL-P-19468	COLOR: RED	
PIN CONTACT QTY = 4 P/N M39029/1-101	COPPER ALLOY PER MIL-C-39029	GOLD PLATE PER MIL-G-45204	

LOC	DIST	REVISIONS					
DF	A0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		E		REVISED PER ECO-15-010636	26AUG2015	RS	CT

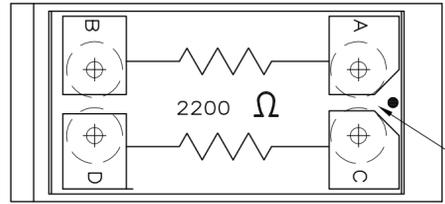

SCHEMATIC DIAGRAM  
(2) 2200 OHM, 1/4 WATT, ±5%  
RLR07C2201JS

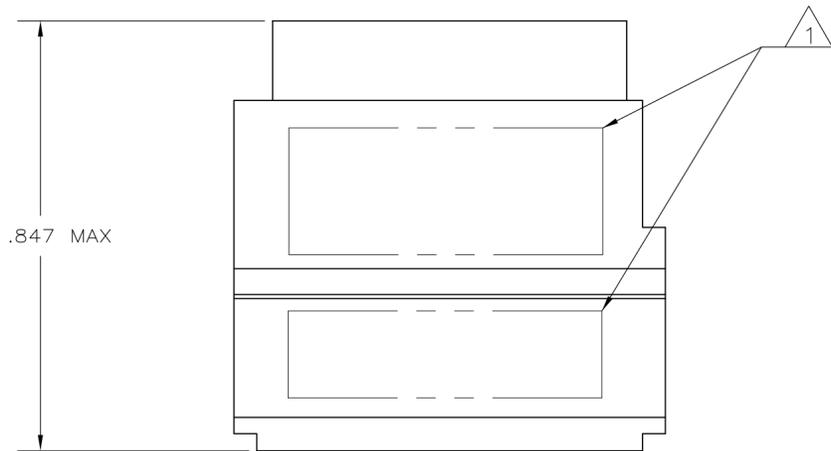

1 MARK MODULE ASSEMBLY WITH "AMP", TE PART NO., AND DATE CODE .060 MIN HIGH.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	16AUG99	<b>TE</b> TE Connectivity	
DIMENSIONS: INCHES		CHK	8-20-99		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		D.MILLER		NAME	
0 PLC ± -		8-20-99		MODULE FEED-BACK ASSEMBLY	
1 PLC ± -		D.MILLER		SIZE 20 TJ WITH	
2 PLC ± -		PRODUCT SPEC		TWO RCR07G222JS RESISTORS	
3 PLC ± .005		APPLICATION SPEC		SIZE	CAGE CODE
4 PLC ± -		WEIGHT		A2	00779
ANGLES ± -		CUSTOMER DRAWING		DRAWING NO	RESTRICTED TO
FINISH		SCALE		C=591871	-
SEE TABLE		4:1		SHEET 1 of 1	
SEE TABLE		REV		E	