


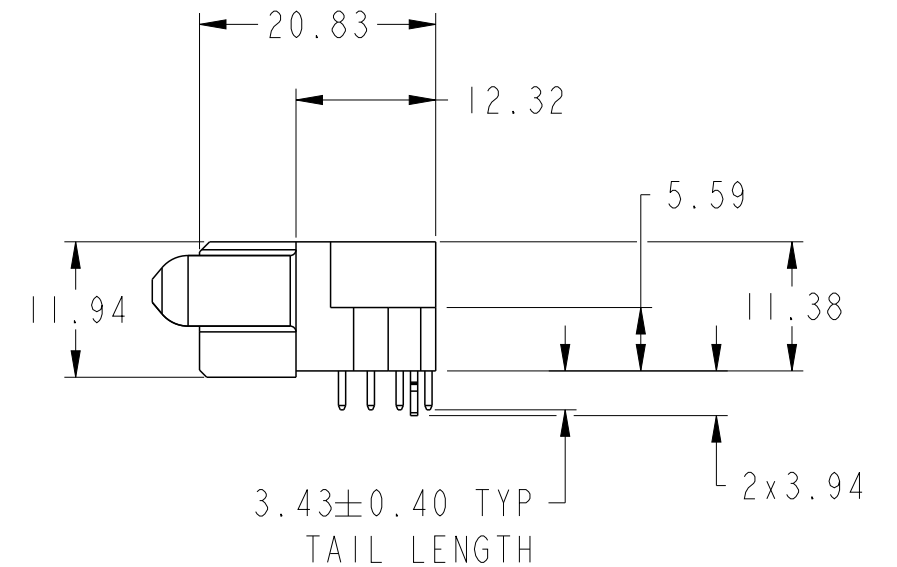
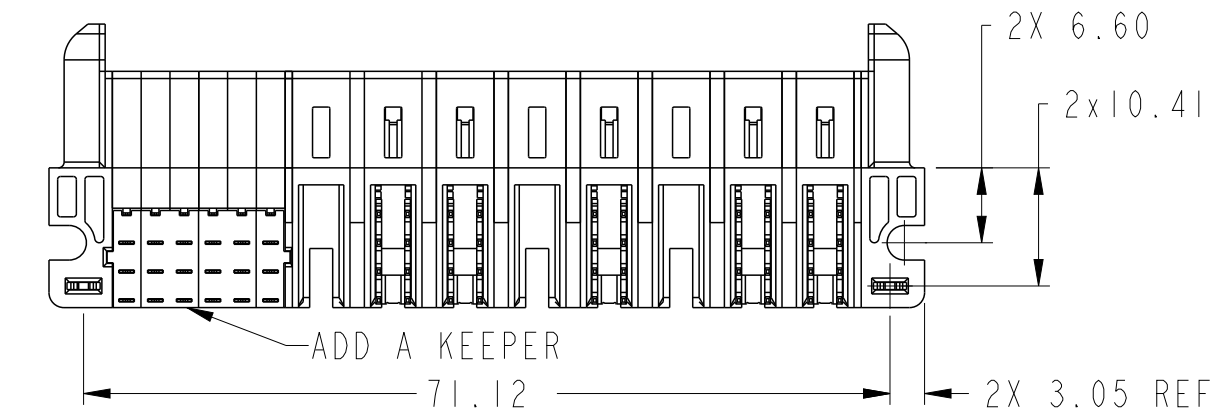
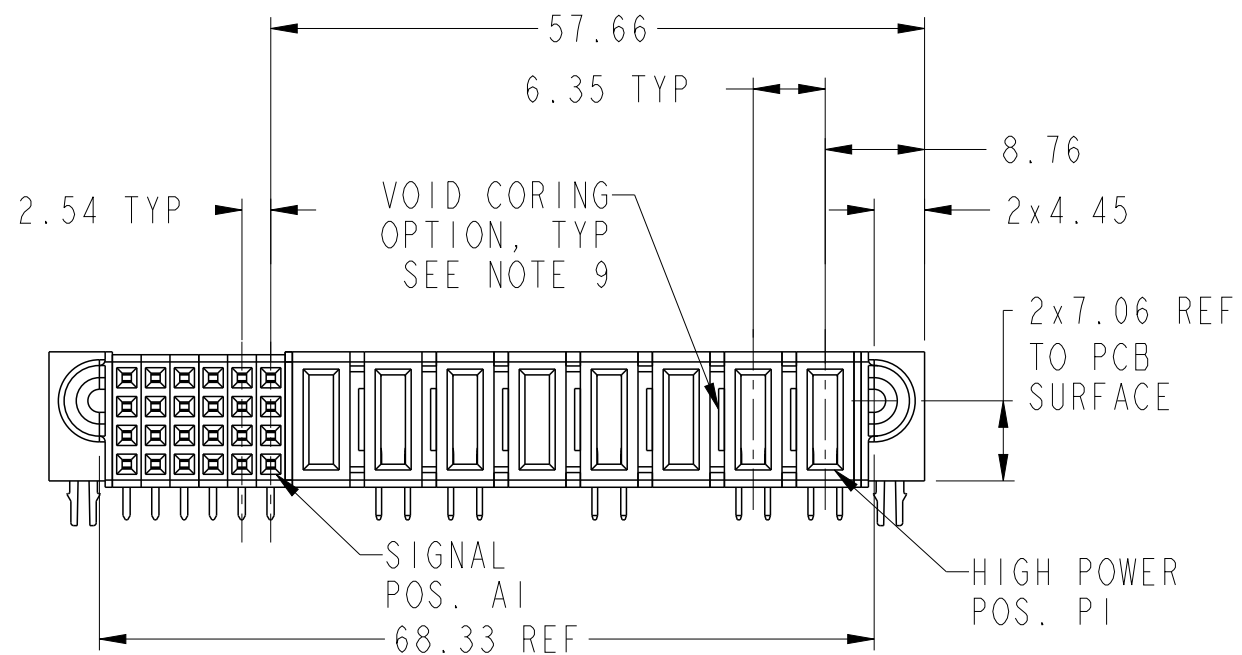


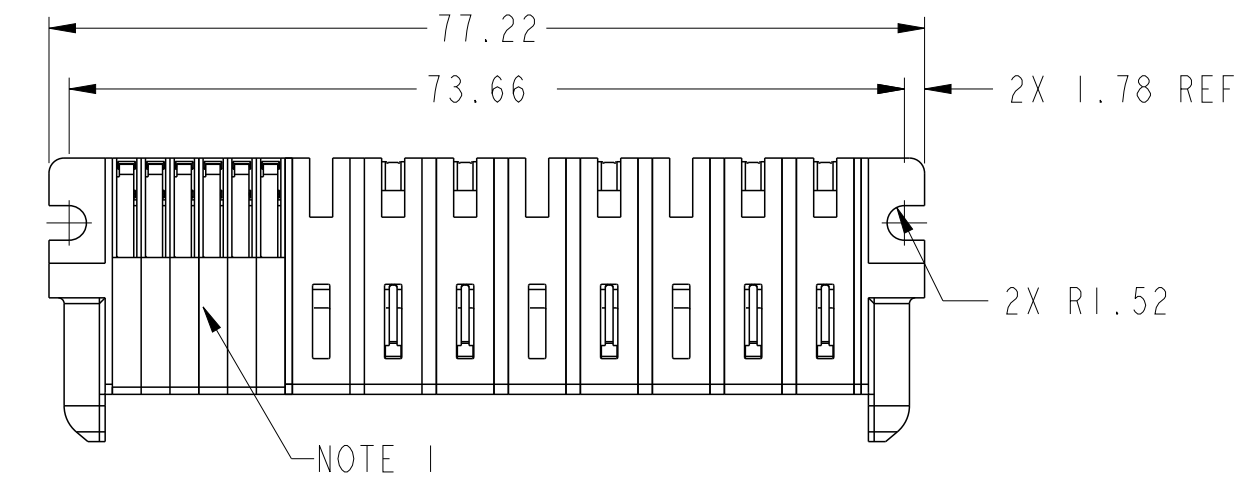
































PRODUCT NUMBER SEE SHEET 2



spec ref		*		dr		Vicking Liu		2015/09/06		projection				MM		size		A3		scale		3:2	
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED		eng		Vicking Liu		2015/10/21						ecn no		-							
ASME Y14.5				chr		Fancy Zhang		2015/10/21															
				appr		Pei-Ming Zheng		2015/10/21															
										product family		PwrBlade+		rel level		Released							
surface		✓		linear		0.X		±0.5				title		24S + 8HP		dwg no		10106126-8006004		rev		A	
				0.XX		±0.25																	
				0.XXX		±0.10																	
ASME Y14.5				angular		0°		±2°		www.fci.com		cat. no.		Product - Customer Drw		sheet 1 of 3							

PRODUCT NO.	ROW S	SIGNAL							HIGH POWER												
		E1	6	5	4	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1	E2				
10106126-8006004LF	D C B A		H	H	H	H	H	H													
		G	G	G	G	G	G														
		F	F	F	F	F	F														
		E	E	E	E	E	E														
																					

CODE	DESCRIPTION
E	STD SIGNAL CONTACT, ROW A
F	STD SIGNAL CONTACT, ROW B
G	STD SIGNAL CONTACT, ROW C
H	STD SIGNAL CONTACT, ROW D
H3	STD HIGH POWER CONTACT(3.43)
HA	METAL HOLD DOWN
X	OMITTED

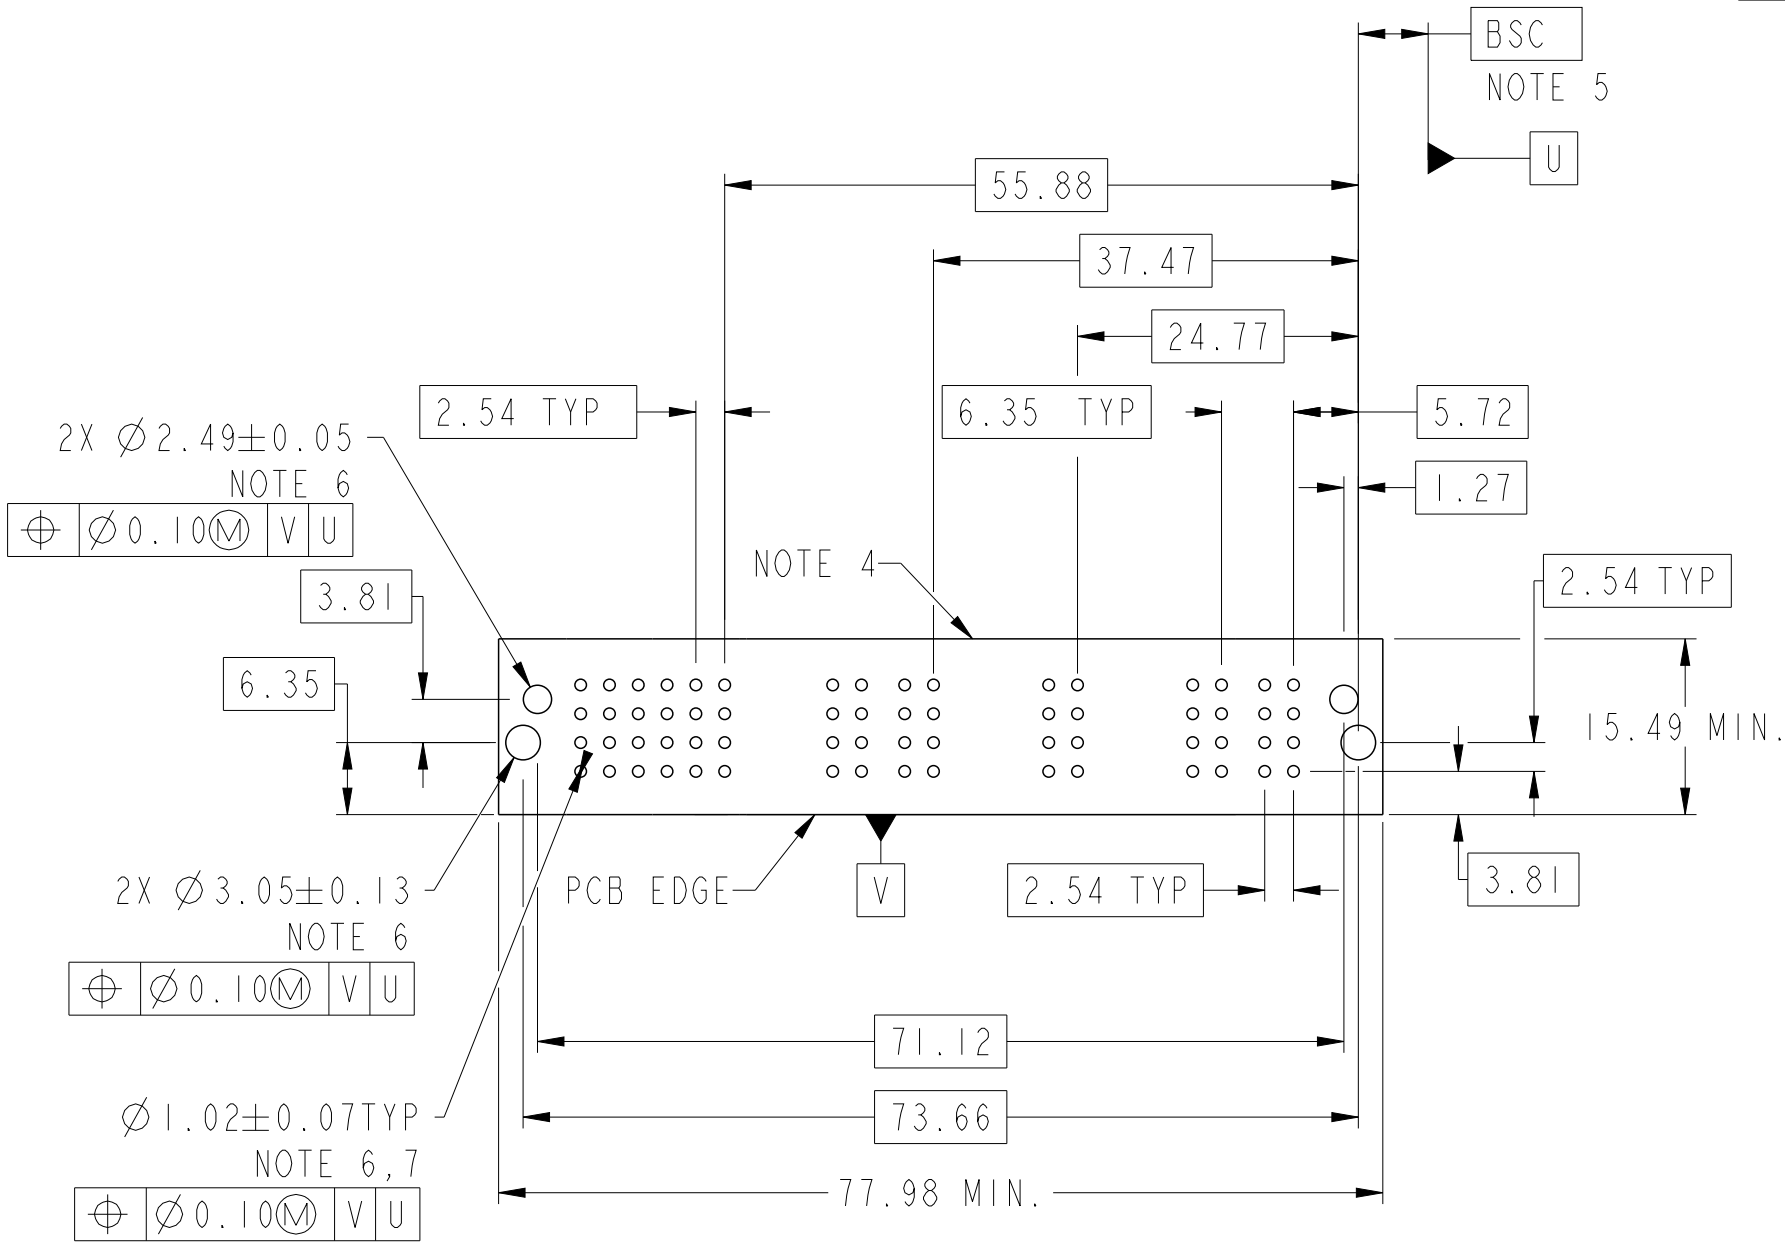




dr	Vicking Liu	2015/09/06	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2
eng	Vicking Liu	2015/10/21			ecn no	-	rel level	Released
chr	Fancy Zhang	2015/10/21						
appr	Pei-Ming Zheng	2015/10/21						
product family			PwrBlade+					
<div></div>			title			rev		
24S + 8HP			dwg no			10106126-8006004		
RA STB RECEPTACLE						A		
www.fci.com			cat. no.			Product - Customer Drw		
						sheet 2 of 3		



Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
-SIGNAL CONTACT - COPPER ALLOY.
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION: 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION: GS-12-658.
APPLICATION SPECIFICATION: GS-20-141.
PRODUCT PACKAGED IN TRAYS: GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZING THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Vicking Liu	2015/09/06	<div>projection</div> <div></div>	<div>MM</div> <div></div>	size	A3	scale	3:2			
eng	Vicking Liu	2015/10/21			ecn no				-		
chr	Fancy Zhang	2015/10/21			rel level				Released		
appr	Pei-Ming Zheng	2015/10/21	product family			PwrBlade+					
<div></div>			title			24S + 8HP RA STB RECEPTACLE		dwg no	10106126-8006004	rev	A
www.fci.com			cat. no.			Product - Customer Drw			sheet 3 of 3		



Copyright FCI.