
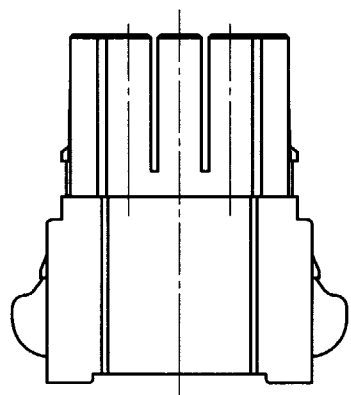



DRAWING FOR REFERENCE: This is subject to change without notice
08/11/2012

TO
Q1

A
B
C
D
E
F

12345678

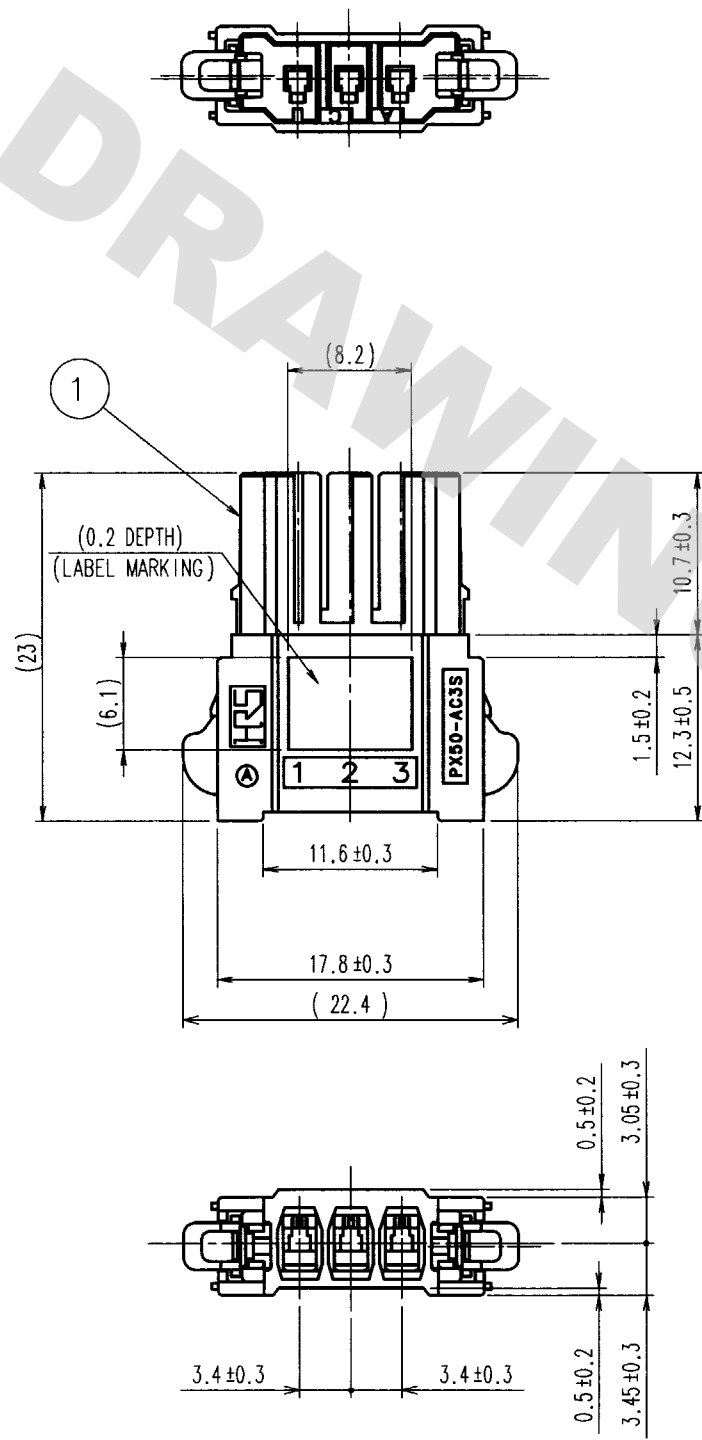

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

TABLE 1

CONTACT CODE	APPLICABLE WIRE	RATED CURRENT
PX50-SC-*31	AWG #16	10A
(*→1 LOOSE PIECE CONTACT)	AWG #18	8A
(*→2 STRIP CONTACT)		

- NOTES 1. APPLICABLE CONTACT, APPLICABLE WIRE AND RATED CURRENT ARE SHOWN IN TABLE 1. SPECIFIED CURRENTS ARE RATED VALUE PER CONTACT. (30A PER 3 CONTACTS FOR AWG #16 WIRE)
2. PLEASE DO NOT USE FOR THE PURPOSE OF INTERRUPTING THE CURRENT.
3. PLEASE ORDER TO BE MADE PER 100 PCS.

NO.	MATERIAL	FINISH, REMARKS	1	PBT	(COLOR:BLACK) UL94V-0
CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED
		13.5.9	13.5.9	13.5.10	13.5.10
SCALE	DRAWING NO.	PART NO.	CODE NO.		
2 : 1	EDC3-121810	PX50-AC3S	CL236-0010-0		
UNITS	HRS	HIROSE ELECTRIC CO., LTD			

A
B
C
D
E
F