



TOP VIEW




Silk Screen
Marking
"7 G"
Year | Month
7=2007 G=Jul.

SIDE VIEW

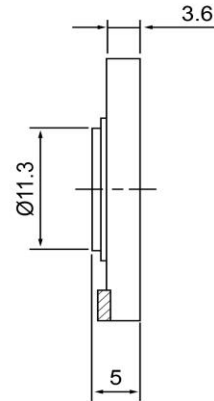

BOTTOM VIEW

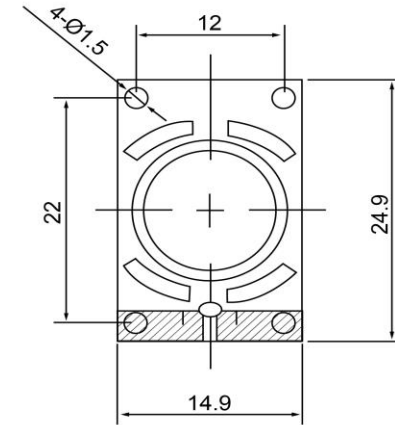

Specifications

Description	Value	Unit
Shape	Rectangle	
Resonant Frequency	900	(Hz)
Frequency Range	900 ~ 20,000	(Hz)
SPL @ 10cm	82	(dBA)
Impedance	8	(Ohm)
Cone Material	Cloth	
Nominal Power	0.5	(W)
Max Power	1	(W)
Mount Type	Frame	
Operating Temperature	-20 ~ +55	°C
Storage Temperature	-20 ~ +55	°C
Weight	2	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
- 2) All parts meet RoHS



DB UNLIMITED

Dynamic Speaker

Revision History

Version	Description			Date	Approved
1	Released from Engineering			10/21/2013	J.S

SC240908-1