


REVISIONS		
LTR	DESCRIPTION	DATE
H	REVISED PER DCR NO R060222	10/13/2006

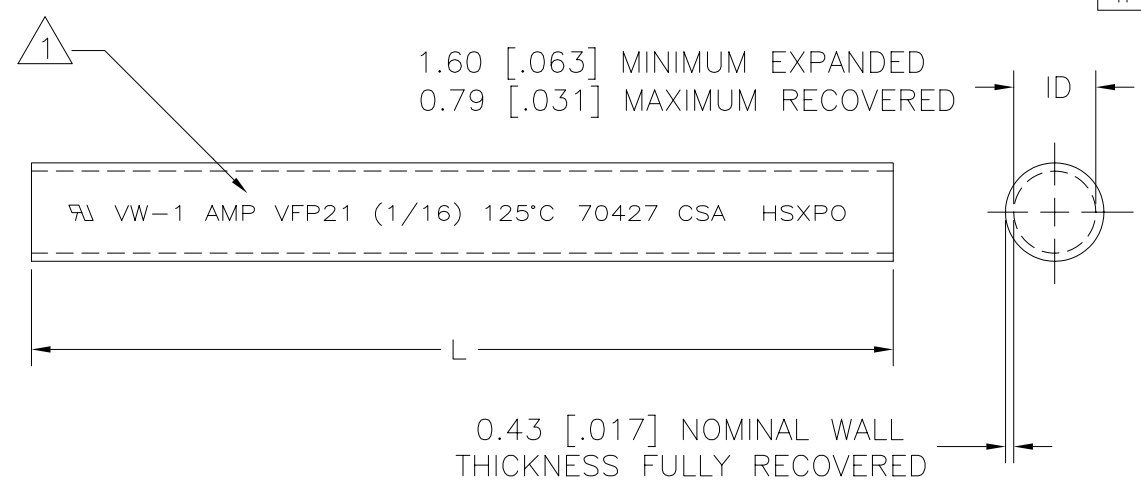

- 1. TUBING VFP21 MARKED AS SHOWN IN WHITE CHARACTERS ON SURFACE INDICATED.
- 2. TUBING VFP21 IS UL RECOGNIZED, IS RATED 125°C [257°F], 600 V AND MEETS VW-1 FLAME TEST.
- 3. TUBING VFP21 IS CSA CERTIFIED AND MEETS VW-1 FLAME TEST.
- 4. TUBING FP21 IS UNMARKED AND MEETS REQUIREMENTS OF AMS-DTL-23053/5-102-0

If this document is printed it becomes uncontrolled. Check for the latest revision

4	4	304.8 m [1000 ft] MINIMUM	1-603322-2
		1.22 m [4 ft] MINIMUM	1-603322-1
1	2 3	304.8 m [1000 ft] MINIMUM	603322-3
		1.22 m [4 ft] MINIMUM	603322-1
MARKING	NOTES	LENGTH L	PART NUMBER

- 5. WEIGHT PER LINEAR FOOT/304.8 mm:  
.51 g/.001 lbs.
- 6. MATERIAL: BLACK POLYOLEFIN

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN mm. INCH DIMENSIONS ARE IN BRACKETS.  DECIMALS .XX ± .01 [.0004 in] .X ± .1 [.004 in]  ANGLES .X ± 0.5 DEG	DRAWN UNGUYEN	DATE 10/13/2006	Tyco Electronics Corporation 300 Constitution Drive Menlo Park, CA. USA 94025 
	RPN		
	CAD NAME R060222		THIRD ANGLE PROJECTION 
DD NOT SCALE THIS DRAWING			SHEET 1 OF 1