
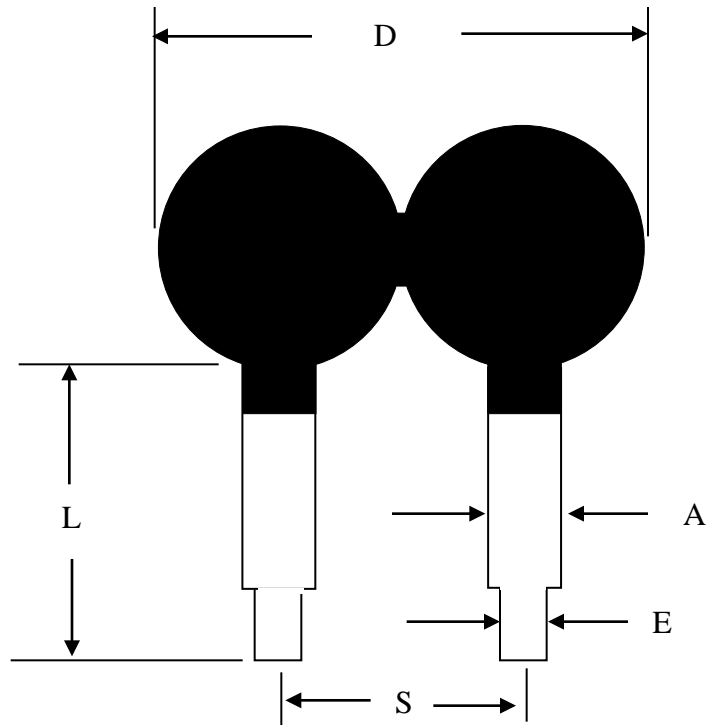


Part Number: MM35 1R550-DIN

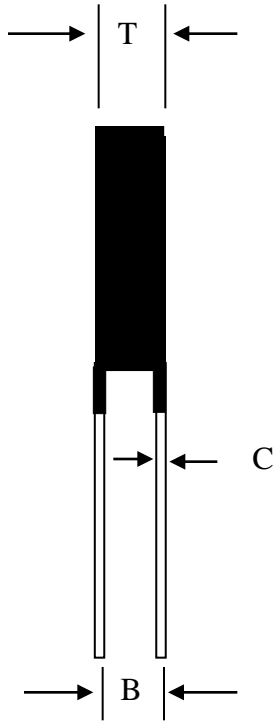

Electrical Specifications:

Mechanical Specifications:

| | |
|--|---------------|
| Resistance @ 25°C | 1.5 Ω ± 25 % |
| Max Steady State Current Up to 65°C | 50.0 A |
| Max recommended energy rating (Joules) | 1200.0 Joules |
| Rhot @100% Steady State Current | 0.010Ω |
| Rhot @75% Steady State Current | 0.015Ω |
| Rhot @50% Steady State Current | 0.030Ω |
| Rhot @25% Steady State Current | 0.095Ω |
| Body Temperature @ 100% Current rating | 208°C |
| Max Recommended Voltage | 680V |
| Material Type | B |
| Max Power | 38.4W |

| | |
|--------------------|-------------|
| D | 68.0mm Max |
| T | 8.5mm Max |
| S | 34.0mm Nom |
| L | 38.5 mm Nom |
| A (Lead Width) | 9.6mm Nom |
| B | 6.0mm Nom |
| C (Lead Thickness) | 0.8mm Nom |
| E | 5.7mm Nom |

Note: 35DM3R0-X

Ametherm, Inc. 961 Fairview Drive Carson City, NV 89701
Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670
www.ametherm.com