



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		D	REVISED PER ECO-13-015151	16DEC2013	FL	FY

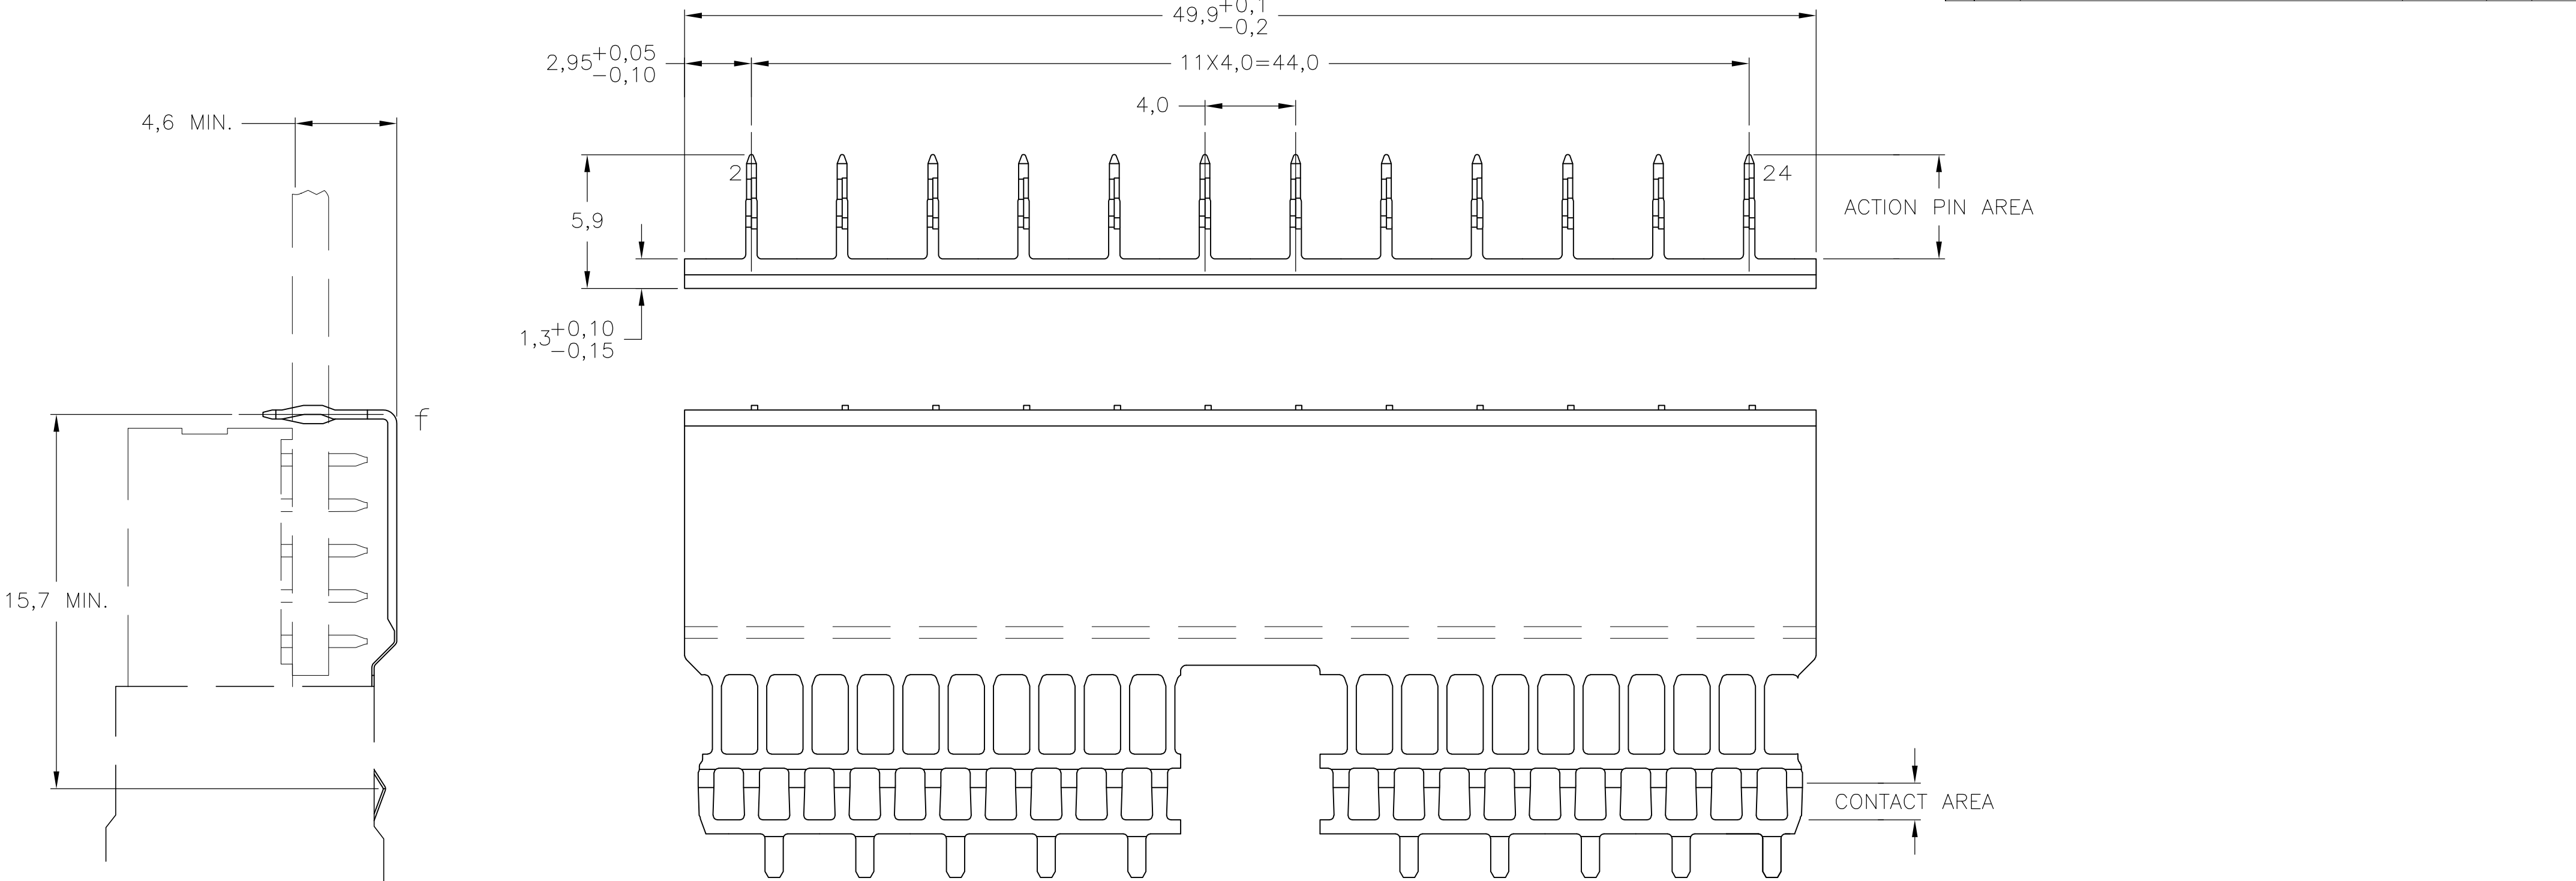

- NOTES:
- GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN.AND ACTION PIN: 0,5µm TIN MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
 - MATERIAL; PHOSPHORBRONZE.
 - ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
 - HOLE PATTERN FOR FEMALE CONNECTOR TYPE A WITH UPPERSHIELD, 110+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
 - MAX. BOARD THICKNESS 3,5 mm.
 - SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
 - CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
 - CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III,CENTRAL OFFICE APPLICATIONS.
 - 0.76µm MIN GOLD PLATING AT MATING SURFACE.

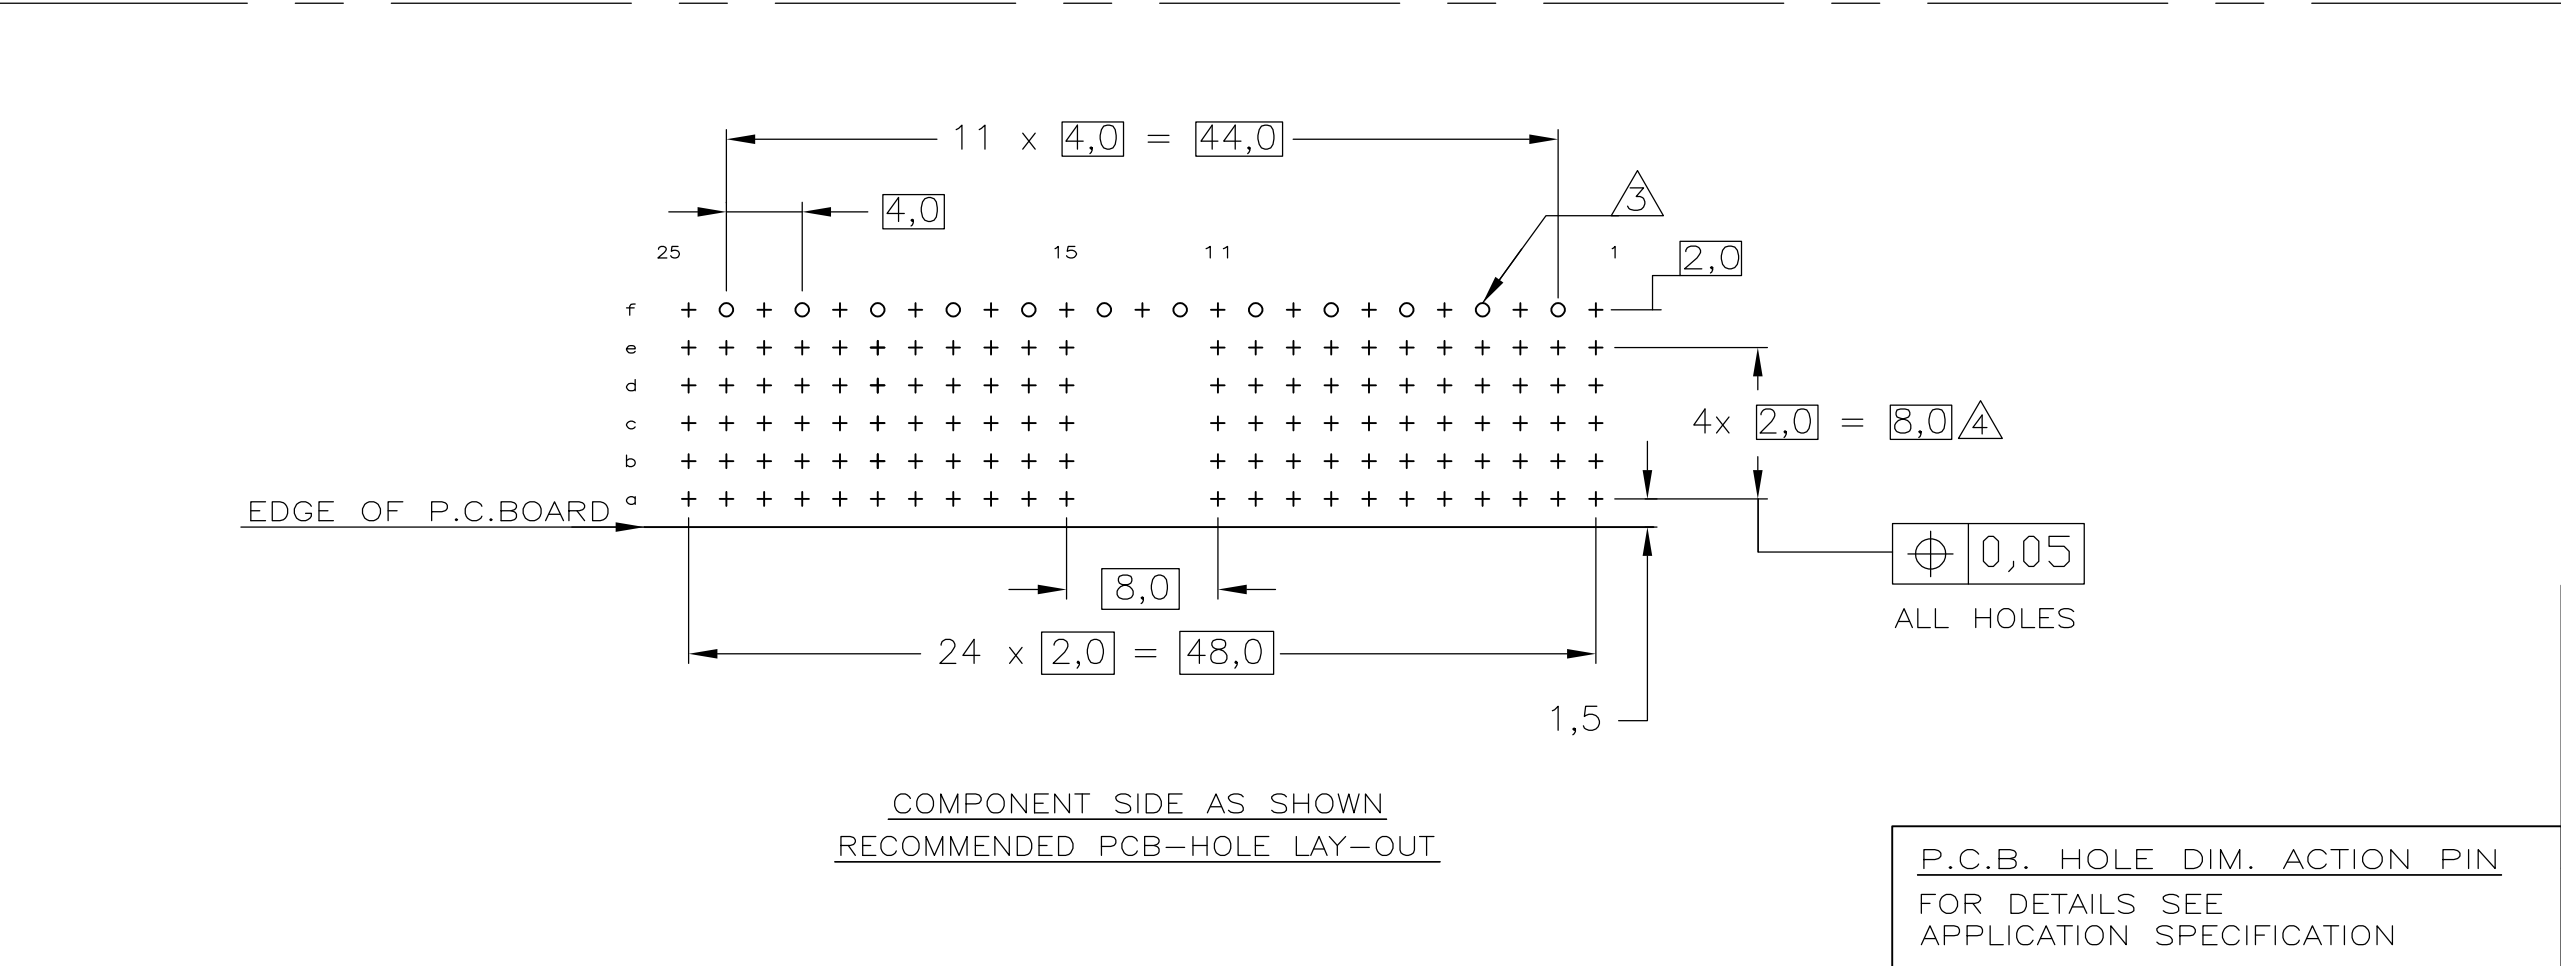

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN	13AUG04	TE Connectivity	
DIMENSIONS: mm		CHK B.MOOIJ	25MAR05		
		APVD B.MOOIJ	25MAR05	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE A	
		PRODUCT SPEC 108-19082			
MATERIAL -		APPLICATION SPEC 114-19029		SIZE A2	CAGE CODE 00779
		FINISH -		DRAWING NO C=5338108	RESTRICTED TO -
		CUSTOMER DRAWING		SCALE 5:1	SHEET 1 of 1
				REV D	