

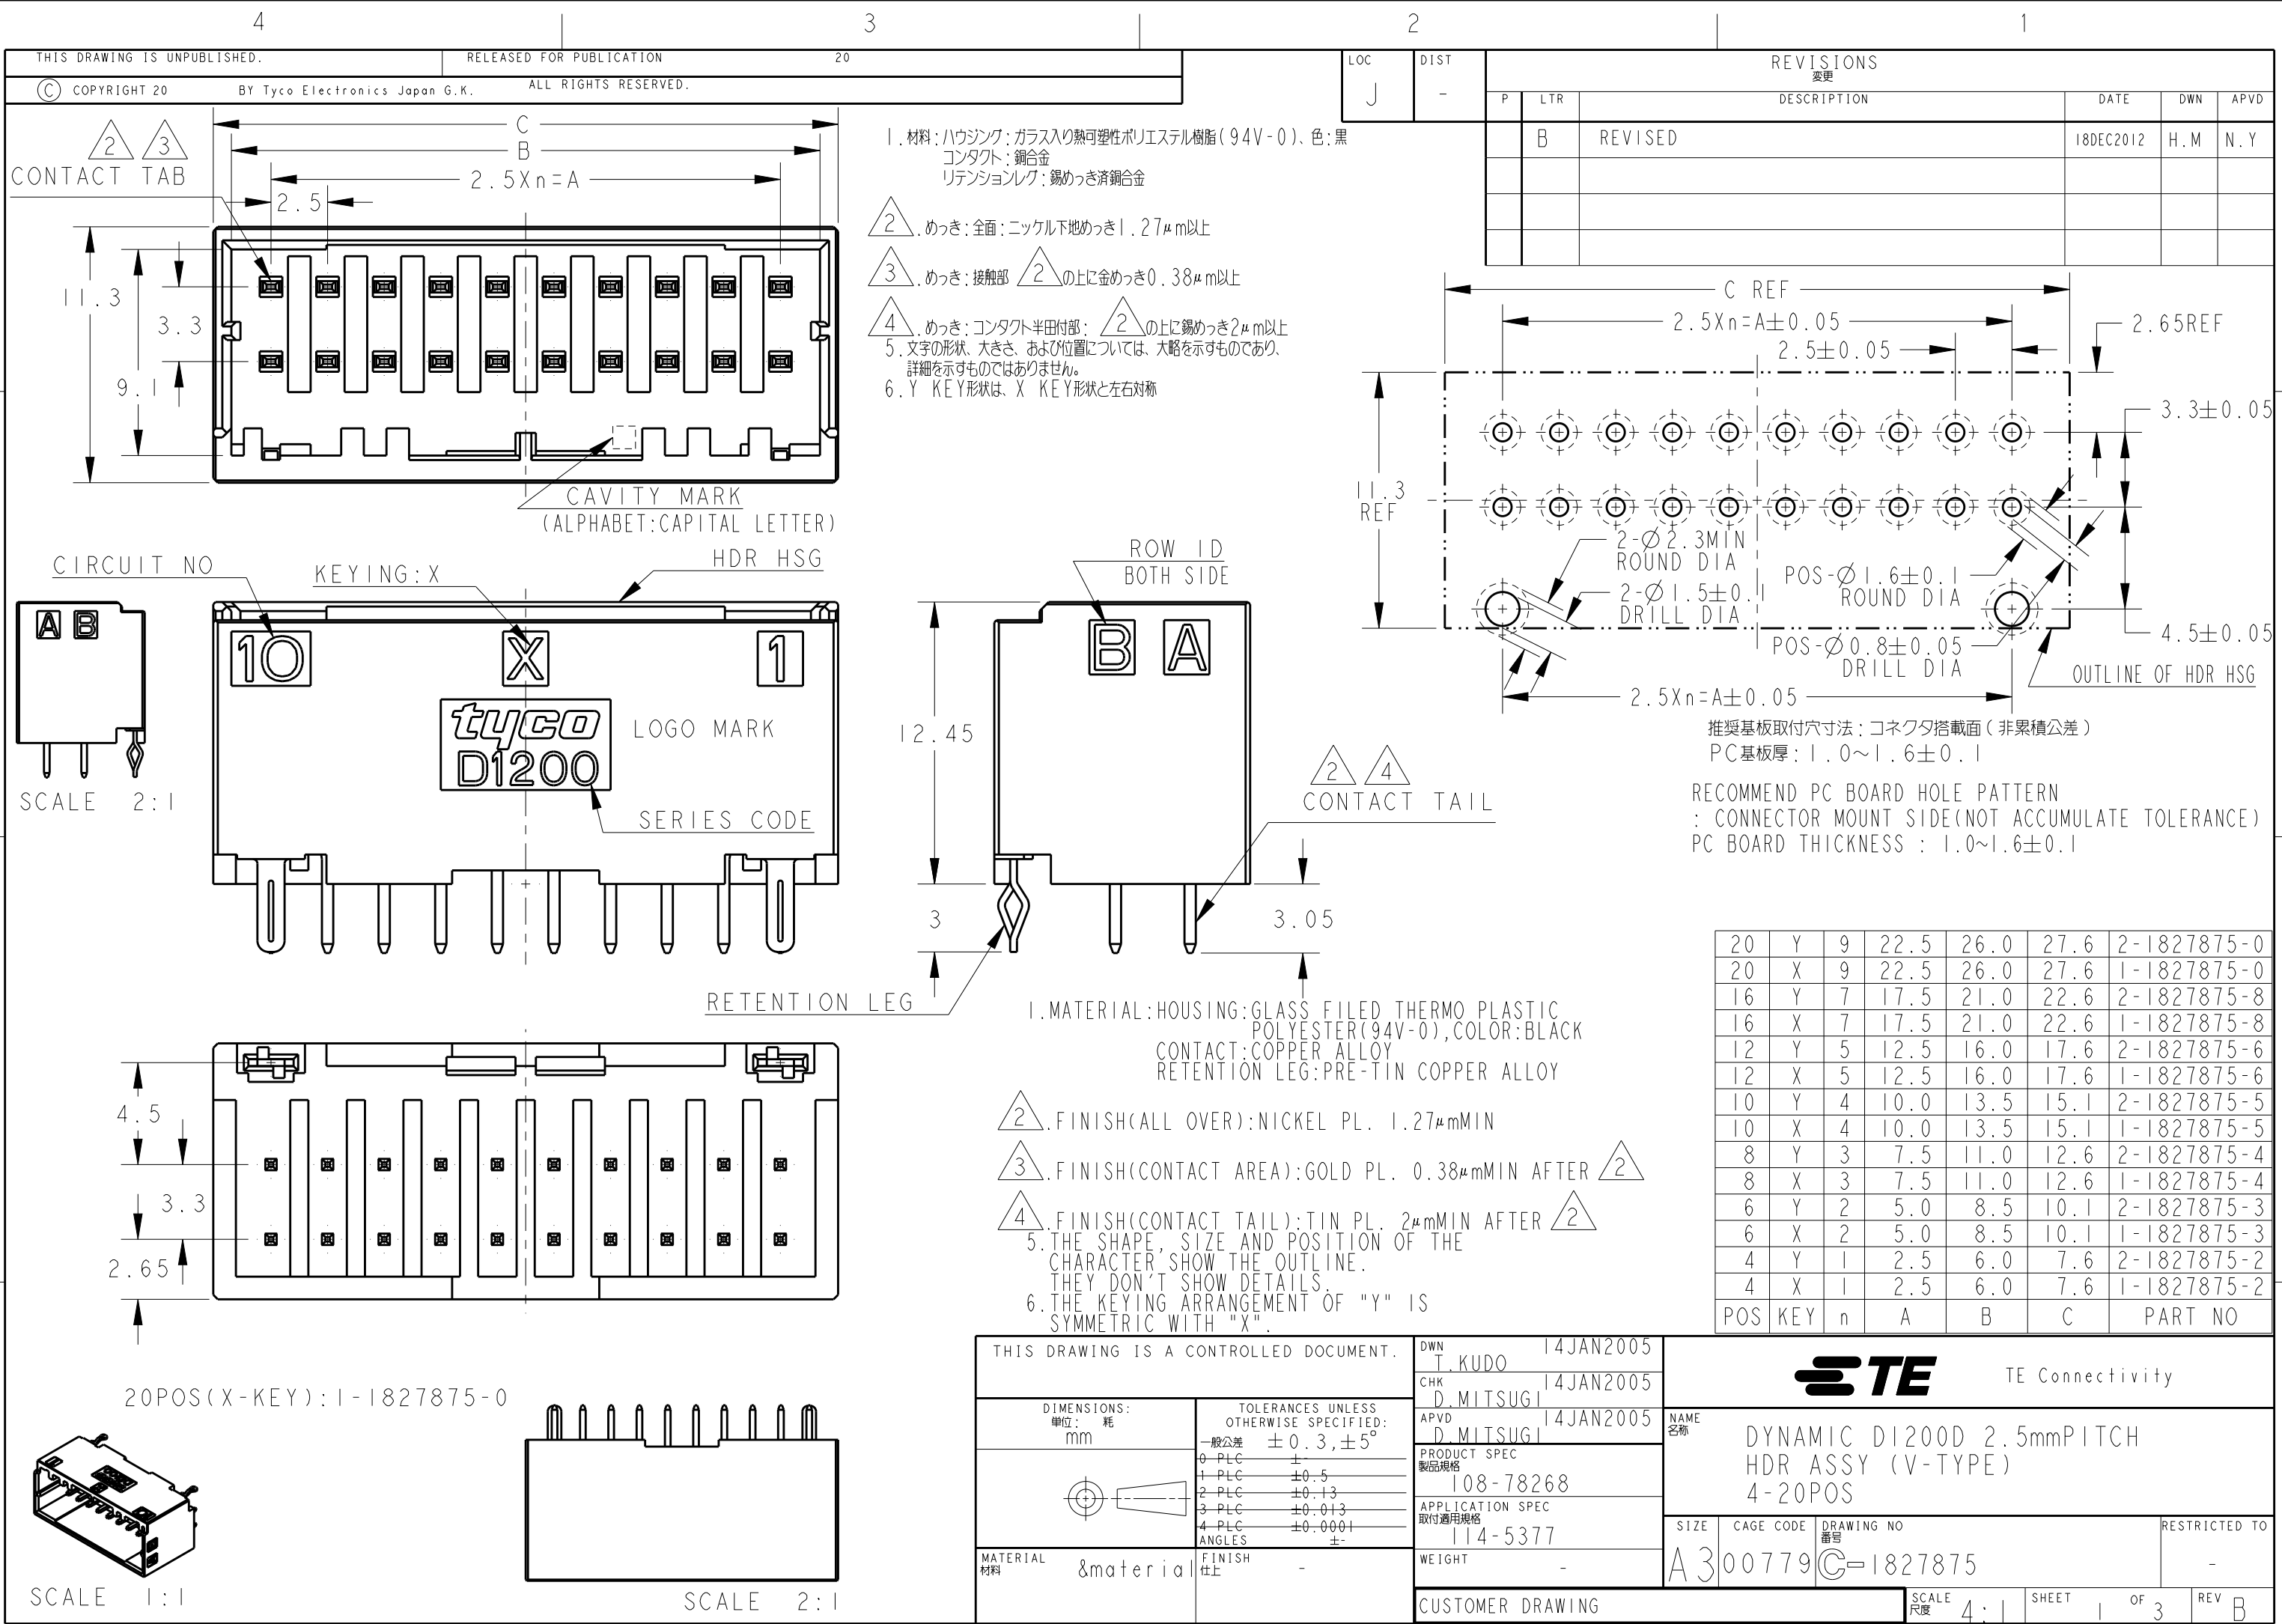


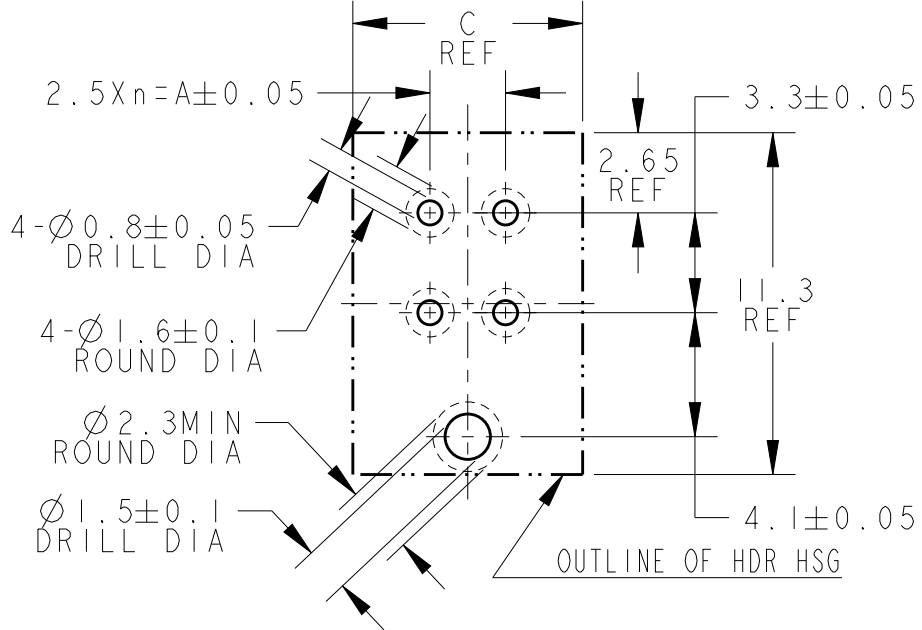





THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
© COPYRIGHT 20 BY Tyco Electronics Japan G.K. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
J	-			SEE SHEET 1 OF 3		

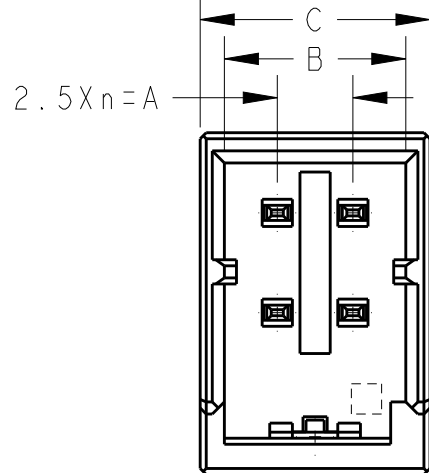







推奨基板取付穴寸法: コネクタ搭載面 (非累積公差)
PC基板厚: 1.0~1.6±0.1
RECOMMEND PC BOARD HOLE PATTERN
: CONNECTOR MOUNT SIDE (NOT ACCUMULATE TOLERANCE)
PC BOARD THICKNESS : 1.0~1.6±0.1

ONLY 4POS

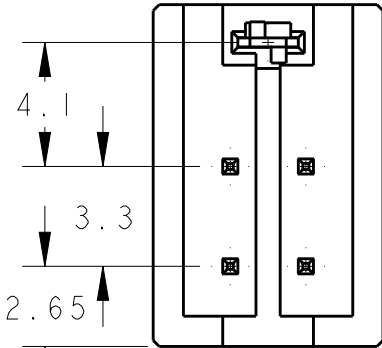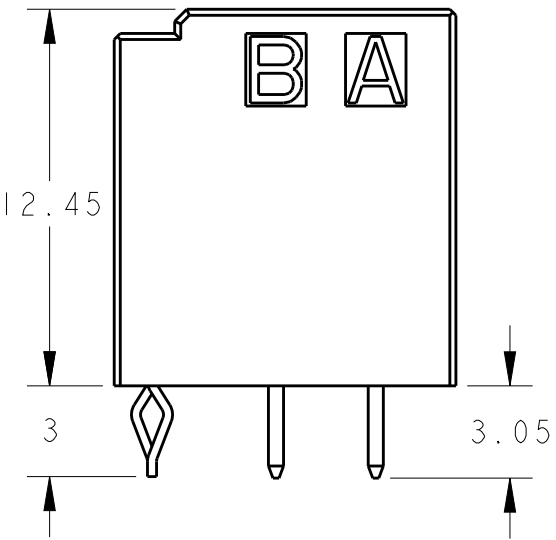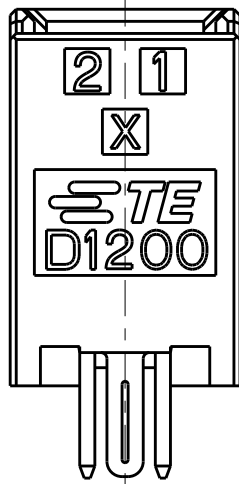


SCALE 2:1

4POS(X-KEY):1-1827875-2




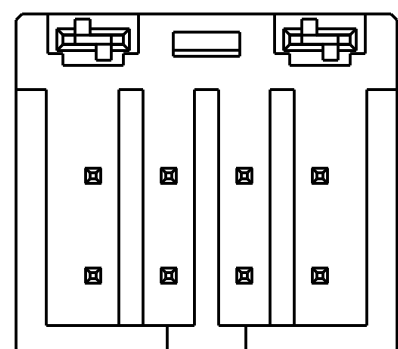

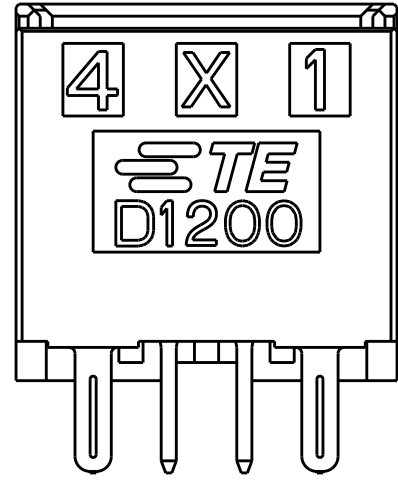
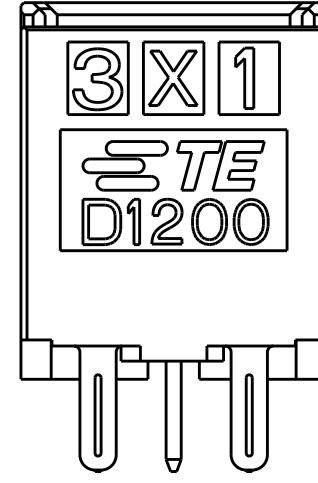
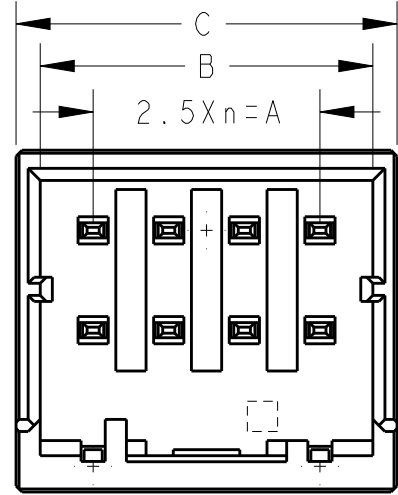
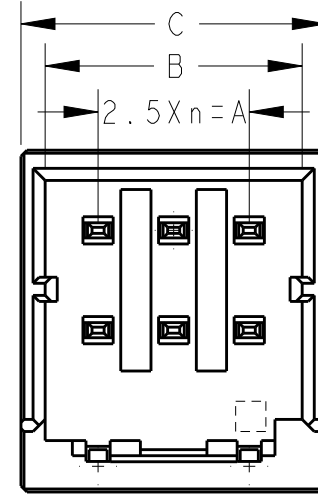


6POS(X-KEY):1-1827875-3

8POS(X-KEY):1-1827875-4

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. KUDO	14JAN2005	 TE Connectivity	
		CHK D. MITSUGI	14JAN2005		
DIMENSIONS: mm		APVD D. MITSUGI	14JAN2005	NAME DYNAMIC D1200D 2.5mmPITCH HDR ASSY (V-TYPE) 4-20POS	
		PRODUCT SPEC 108-78268			
		APPLICATION SPEC 114-5377			
		WEIGHT -			
		CUSTOMER DRAWING			
		SCALE 4:1			
MATERIAL &material		FINISH -		RESTRICTED TO -	
				SHEET 2 OF 3	
				REV B	


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	APVD
J	-			SEE SHEET 1 OF 3		

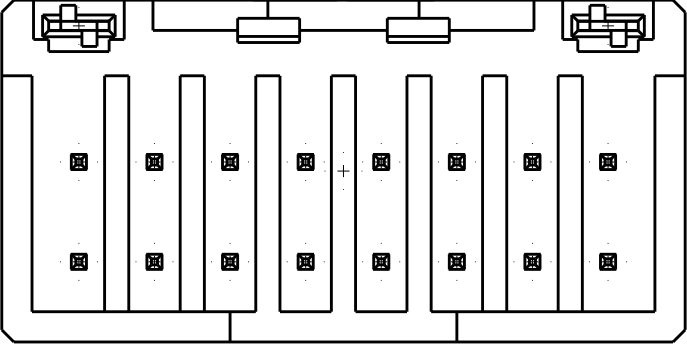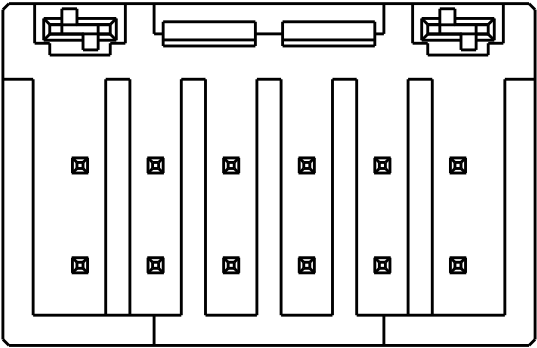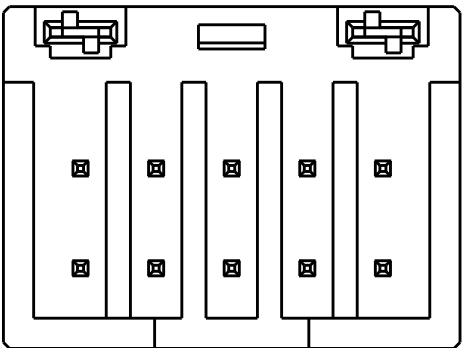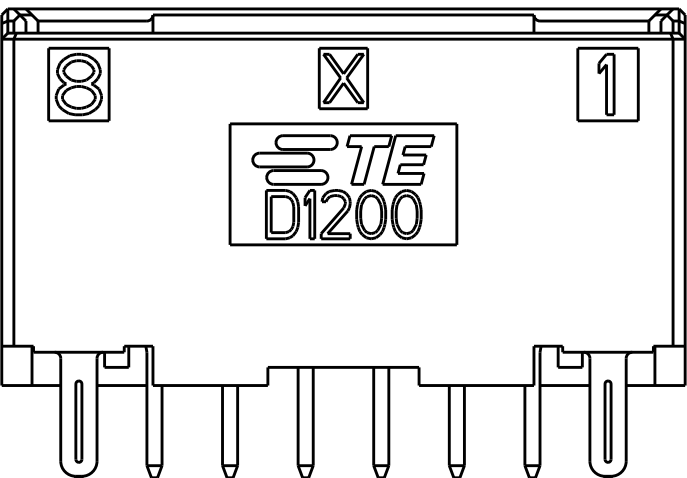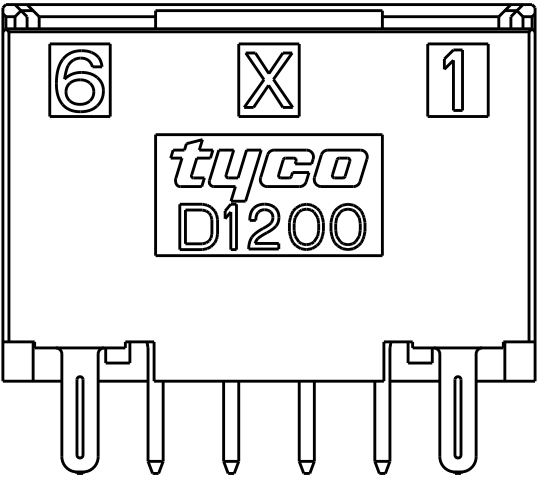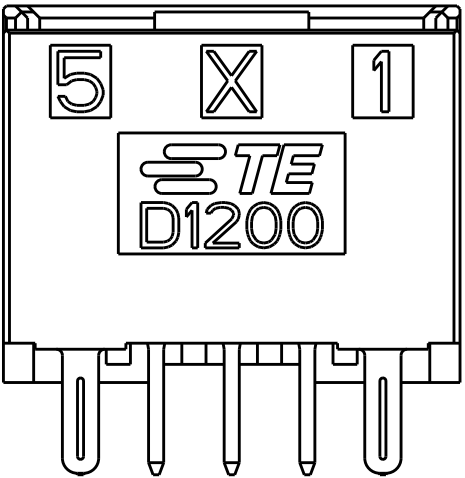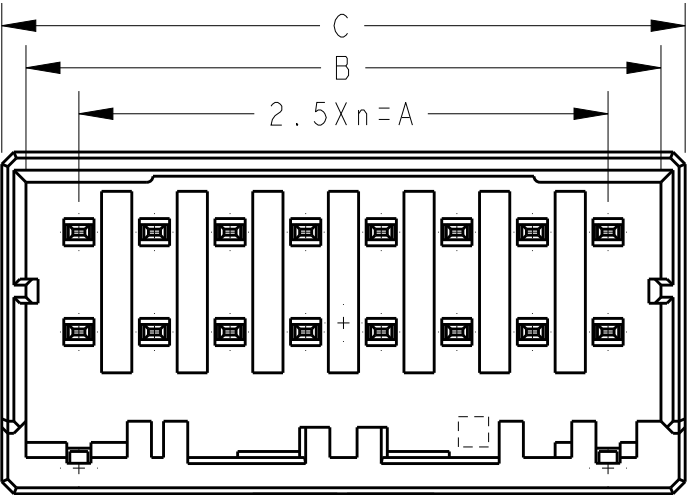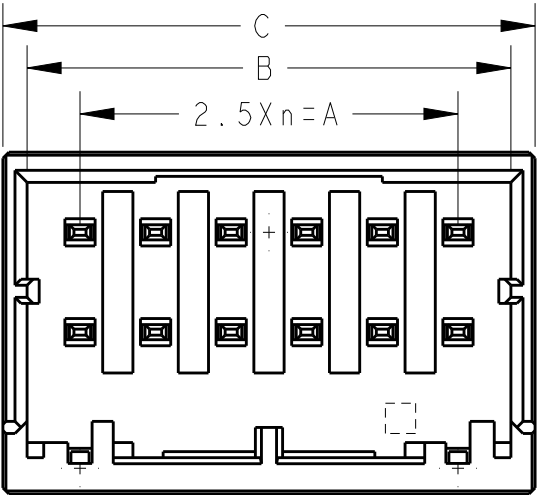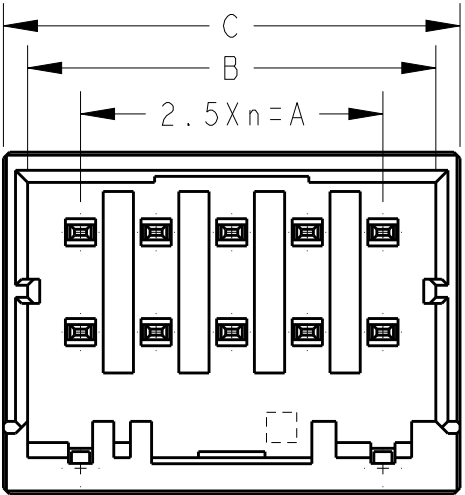

10POS(X-KEY):1-1827875-5

12POS(X-KEY):1-1827875-6

16POS(X-KEY):1-1827875-8

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.KUDO	14JAN2005	 TE Connectivity					
DIMENSIONS: mm		CHK D.MITSUGI	14JAN2005						
 		APVD D.MITSUGI	14JAN2005	NAME DYNAMIC D1200D 2.5mmPITCH HDR ASSY (V-TYPE) 4-20POS					
		PRODUCT SPEC 108-78268							
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.5 1 PLC ±0.13 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±. FINISH -		APPLICATION SPEC 114-5377		SIZE A3	CAGE CODE 00779	DRAWING NO C-1827875	RESTRICTED TO -		
		WEIGHT -							
MATERIAL &material		CUSTOMER DRAWING				SCALE 4:1	SHEET 3	OF 3	REV B