


HDM16216L-5

Dimensional Drawing

16 Character x 2 Lines LED Backlight, Connector on Top

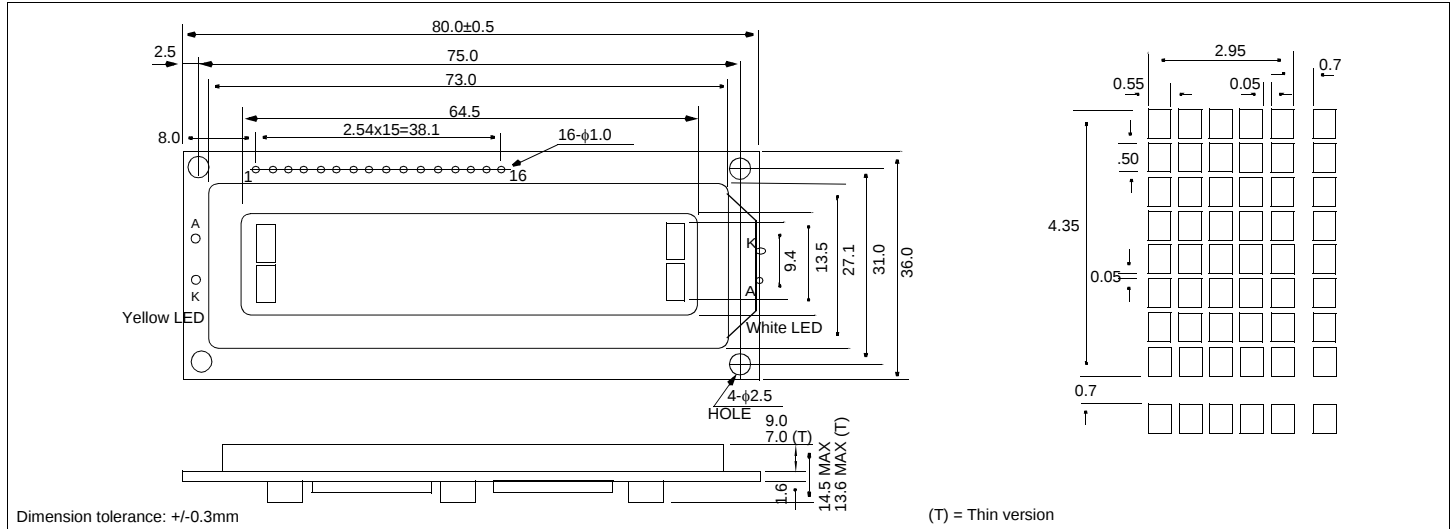

Features

Character Format 5x7 Dots with Cursor
 Backlight..... White or Yellow LED
 Options.....TN/Gray STN/Yellow STN, FSTN
 12 o'Clock/6 o'Clock View
 Normal/Extended Temperature
 Normal/Negative Displays

Physical Data

Module Size80.0W x 36.0H x 14.5T mm
 Thin version.....80.0W x 36.0H x 13.0T mm
 Viewing Area Size.....64.5W x 13.5H mm
 Weight.....35g


Absolute Maximum Ratings

PARAMETER	SYMBOL	MIN	MAX	UNIT
SUPPLY VOLTAGE	$V_{DD}-V_{SS}$	0	7.0	V
SUPPLY VOLTAGE FOR LCD	$V_{DD}-V_L$	0	13.5	V
OPERATING TEMPERATURE	T_{OP}	0	50	°C
STORAGE TEMPERATURE	T_{STG}	-20	70	°C
LED FORWARD CURRENT (White) (Yellow)	I_F	-	25	mA
		-	120	
LED REVERSE VOLTAGE (White) (Yellow)	V_R	-	5	V
		-	8	
LED POWER CONSUMPTION (White) (Yellow)	P_D	-	80	mW
		-	540	

Electrical Characteristics (VDD=5.0±0.25V 25°C)

PARAMETER	SYM	CONDITION	MIN	TYP	MAX	UNIT
POWER SUPPLY CURRENT	I _{DD}	V _{DD} = 5.0V	-	1.0	2.2	mA
POWER SUPPLY FOR LCD	V _{DD} -V _L	T _A = 25°C	4.3	-	4.7	V
LED FORWARD Vtg (White) (Yellow)	V _F	I _F = 20mA	3.0	3.3	3.6	V
		I _F = 75mA	3.9	4.1	4.5	
BRIGHTNESS (White) (Yellow)	L	I _F = 20mA	60	75	-	cd/m2
		I _F = 75mA	30	50	-	
DRIVE METHOD	1/16 Duty					

Block Diagram

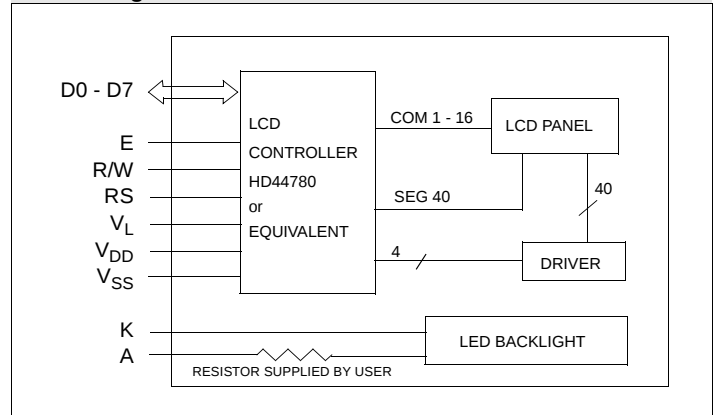

Pin Connections

PIN NO.	SYMBOL	LEVEL	FUNCTION	
1	V _{SS}	-	0V	Power supply
2	V _{DD}	-	5V	
3	V _L	-	-	
4	RS	H/L	H: Data input L: Instruction data input	
5	R/W	H/L	H: Data read L: Data write	
6	E	H,H→L	Enable signal	
7	D0	H/L	Data bus	
8	D1	H/L		
9	D2	H/L		
10	D3	H/L		
11	D4	H/L		
12	D5	H/L		
13	D6	H/L		
14	D7	H/L		
15	A	-	Anode for LED backlight	
16	K	-	Cathode for LED backlight	