


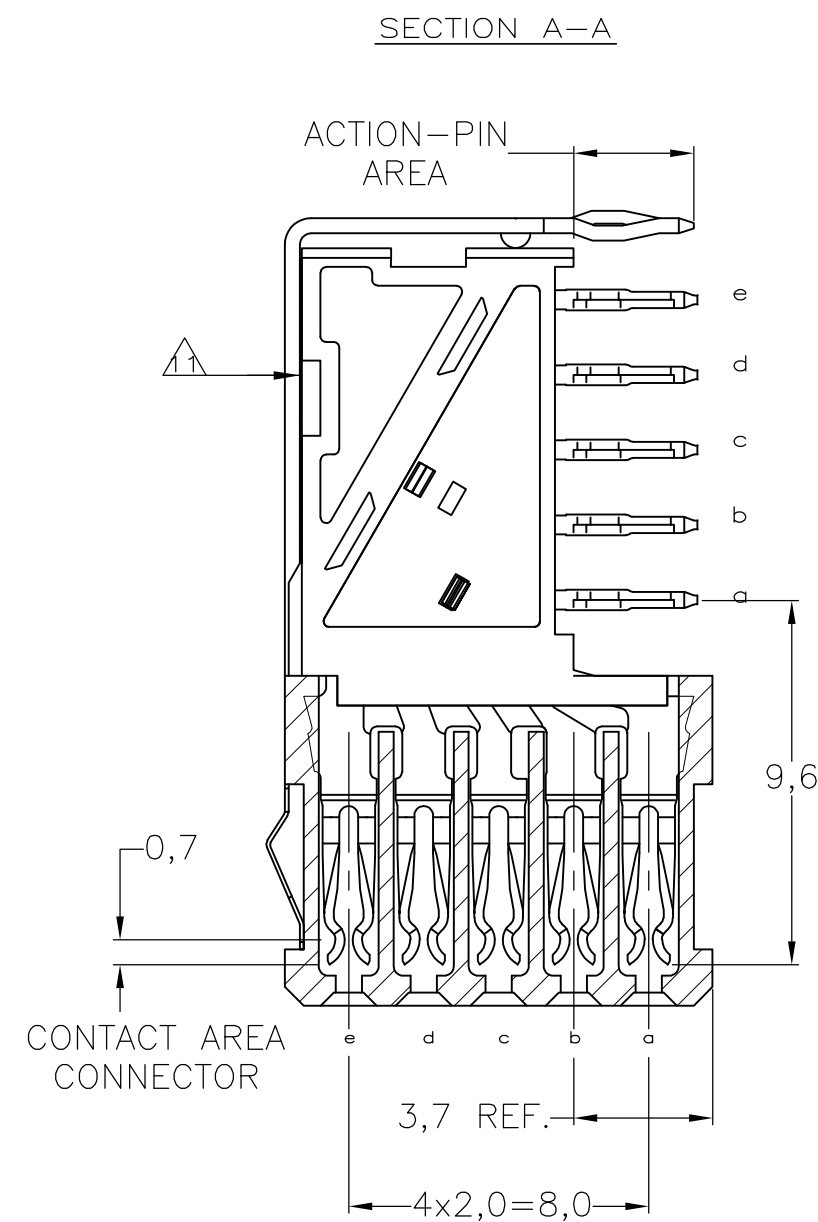

- 1 MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27 μ m NICKEL MIN. AND ACTION PIN: 0,5 μ m TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA
GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- 6 CONNECTOR LUBRICATED WITH TELCORDIA APPROVED LUBRICANT.
- 8 ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
- 9 HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-22 COLUMNS
110 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
- 10 ROW "f" 11 PLATED THROUGH HOLES FOR UPPERSHIELD
- 11 SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE
- 12 BASIC P.N. LOWERSHIELD: 352468
- 13 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 14 0.76 μ m MIN GOLD PLATING ON MATING SURFACES

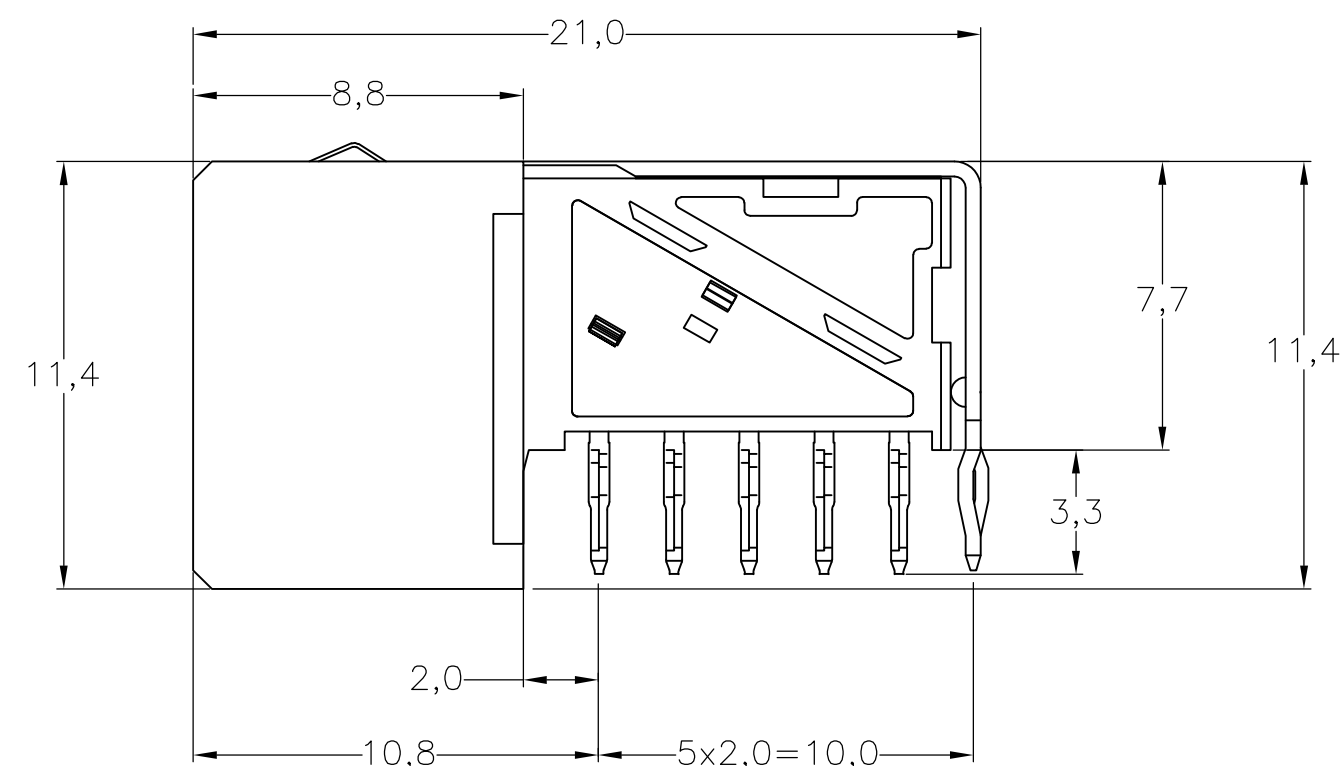



Diagram illustrating a 22x21 grid of points (rows 'a' to 't', columns 1 to 21). The grid is defined by dimensions and calculations:

- Horizontal dimension: $10 \times 4,0 = 40,0$
- Vertical dimension: $4 \times 2,0 = 8,0$
- Bottom horizontal dimension: $21 \times 2,0 = 42,0$
- Right vertical dimension: $1,5$
- Rightmost vertical dimension: 10
- Bottom right corner calculation: $\oplus 0,05$
- Bottom right corner label: ALL HOLES

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN	23SEP96	 TE Connectivity	
		CHK —	—		
DIMENSIONS: mm		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		0-PLC ± — 1-PLC ± — 2-PLC ± — 3-PLC ± — 4-PLC ± — ANGLES ± —		Z-PACK 2MM HM TYPE B — 22 COLUMNS PRE-SHIELDED RECEPTACLE	
MATERIAL —		FINISH —		SIZE A2	CAGE CODE 00779
		WEIGHT —		DRAWING NO C-352152	RESTRICTED TO —
RESTRICTED CUSTOMER				SCALE NTS	SHEET 1 of 1
				REV —	