
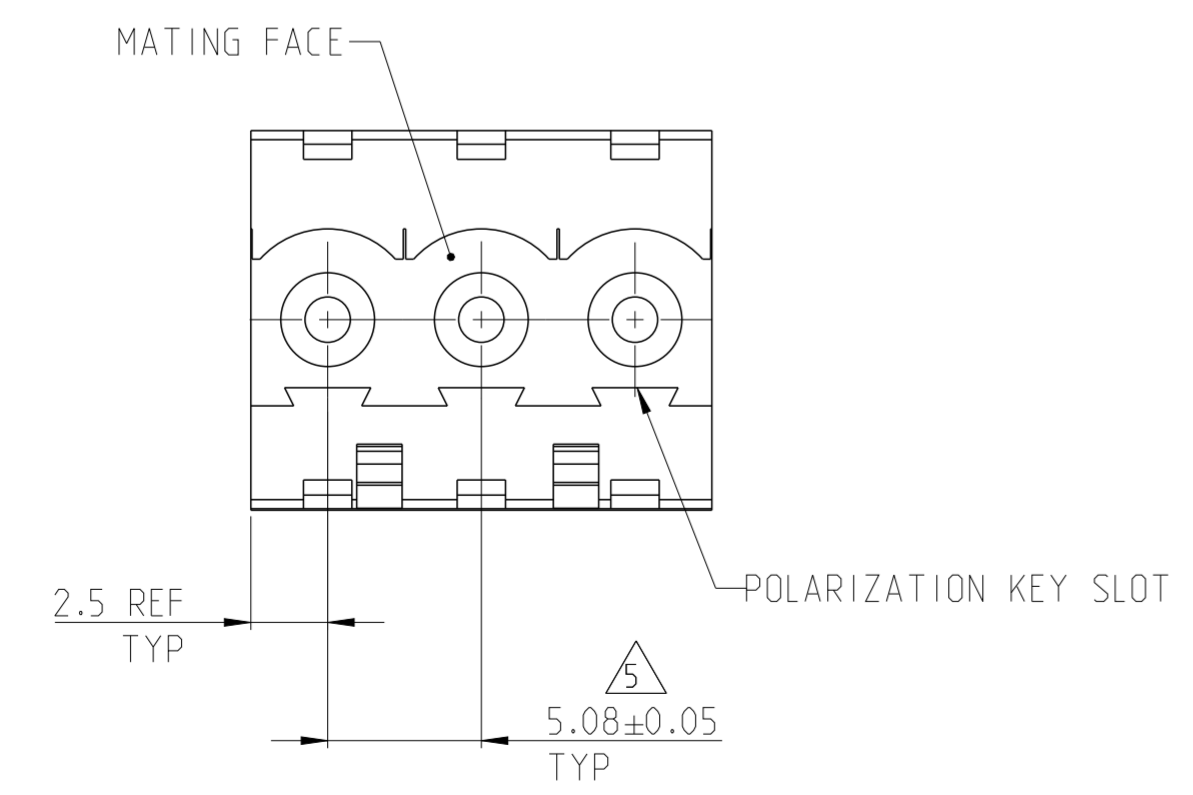
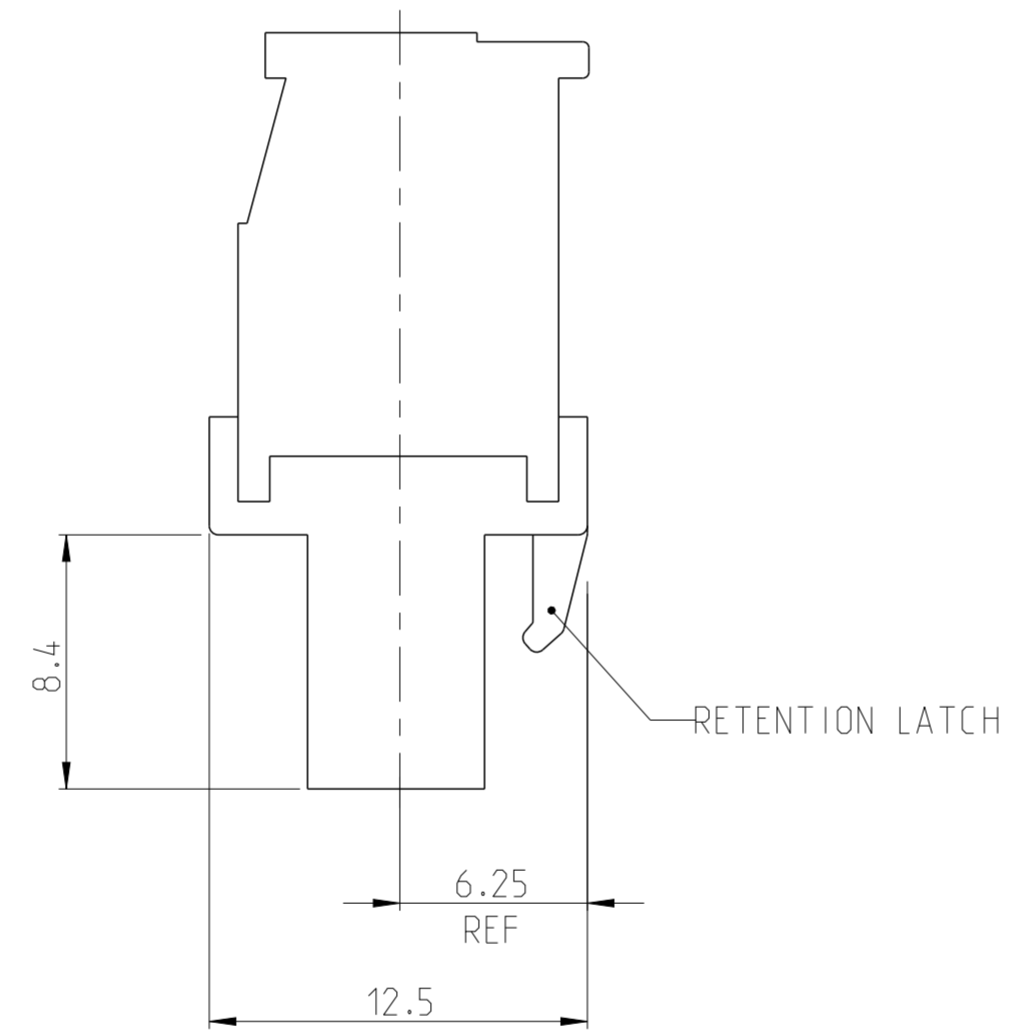
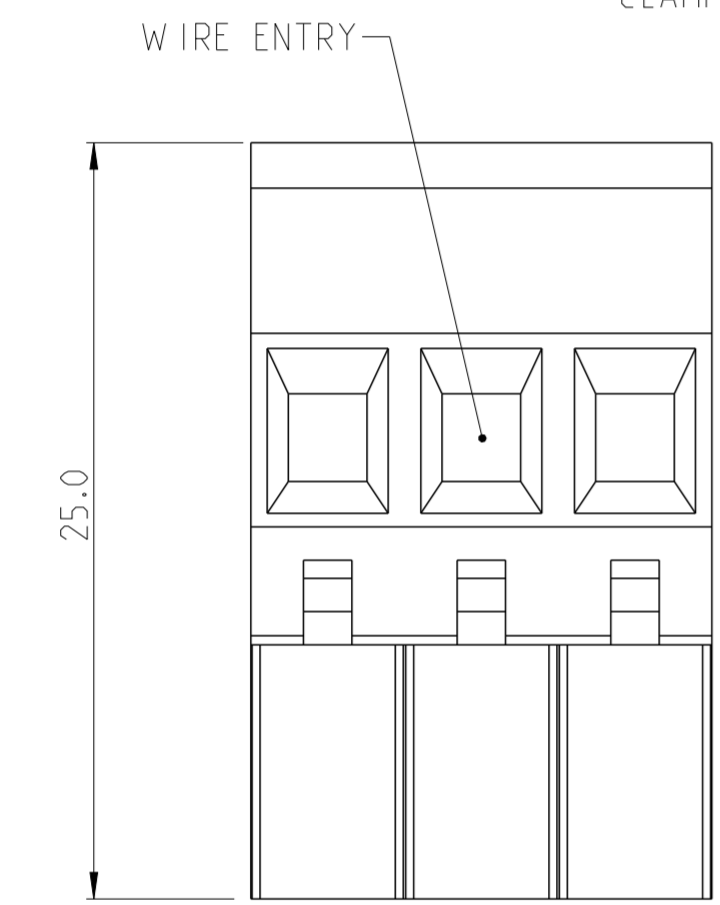


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN APVD
C	4	NOTES CORRECTED AND PART STATUS UPDATED	06APR2018	RK PS

- NOTES:
- MATERIALS AND FINISH  
 HOUSING: PA 6-6, UL 94-V0, COLOR: GREEN.  
 CLAMP: BRASS, NICKEL PLATED.  
 CONTACT SPRING : PHOSPHOR BRONZE, FINISH: SEE TABLE.  
 CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
  - MECHANICAL  
 MAX. INSERTION FORCE PER POLE : 3.0 N  
 MIN. WITHDRAWAL FORCE PER POLE : 1.5 N  
 WIRE STRIPPING LENGTH : 6.0-7.5 mm  
 RECOMMENDED TIGHTENING TORQUE FOR SCREW : 0.5 Nm.
  - ELECTRICAL  
 WIRE RANGE : 12-30 AWG  
 MAX. VOLTAGE : 300 V  
 MAX CURRENT : 15 A  
 CONTACT RESISTANCE : <15 m Ohm  
 INSULATION RESISTANCE : >1000 M Ohm (500V DC)
  - INK MARKING: WHITE COLOR.
- $\triangle 5$  TOLERANCE NOT CUMULATIVE.

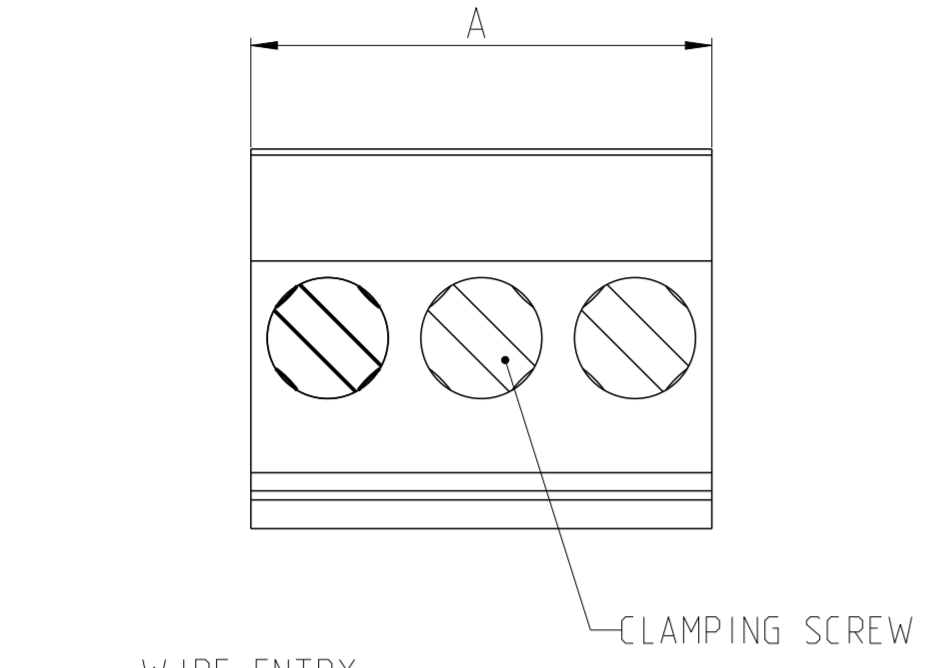

REV	DESCRIPTION	CONTACT FINISH	MARKING	NO OF POSN	PART NUMBER
PRELIMINARY	SEE DETAIL Z	TIN		4	5-1546105-4
OBSOLETE	SEE DETAIL X	TIN		12	6-1546105-0
OBSOLETE	-	.762 μm GOLD		10	5-1546105-9
OBSOLETE	-	.762 μm GOLD		8	5-1546105-8
OBSOLETE	-	.762 μm GOLD		7	5-1546105-7
OBSOLETE	SEE DETAIL W	TIN		12	5-1546105-6
OBSOLETE	SEE DETAIL V	TIN		15	5-1546105-5
OBSOLETE	SEE DETAIL U	TIN		9	4-1546105-9
OBSOLETE	SEE DETAIL T	TIN		8	4-1546105-8
OBSOLETE	SEE DETAIL S	TIN		6	4-1546105-6
OBSOLETE	SEE DETAIL R	TIN		4	4-1546105-4
OBSOLETE	SEE DETAIL P	TIN		10	4-1546105-0
OBSOLETE	SEE DETAIL N	TIN		6	3-1546105-6
OBSOLETE	SEE DETAIL M	TIN		5	3-1546105-5
OBSOLETE	SEE DETAIL L	TIN		4	3-1546105-4
OBSOLETE	SEE DETAIL K	TIN		13	3-1546105-3
OBSOLETE	SEE DETAIL J	TIN		10	3-1546105-0
-	-	TIN		25	2-1546105-5
-	-	TIN		24	2-1546105-4
-	-	TIN		23	2-1546105-3
-	-	TIN		22	2-1546105-2
-	-	TIN		21	2-1546105-1
-	-	TIN		20	2-1546105-0
-	-	TIN		19	1-1546105-9
-	-	TIN		18	1-1546105-8
-	-	TIN		17	1-1546105-7
-	-	TIN		16	1-1546105-6
-	-	TIN		15	1-1546105-5
-	-	TIN		14	1-1546105-4
-	-	TIN		13	1-1546105-3
-	-	TIN		12	1-1546105-2
-	-	TIN		11	1-1546105-1
-	-	TIN		10	1-1546105-0
-	-	TIN		9	1546105-9
-	-	TIN		8	1546105-8
-	-	TIN		7	1546105-7
-	-	TIN		6	1546105-6
-	-	TIN		5	1546105-5
-	-	TIN		4	1546105-4
-	-	TIN		3	1546105-3
-	-	TIN		2	1546105-2

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN S.WELDON 03SEP2002  
 CHK C.RICHARD 03SEP2002  
 APVD C.RICHARD 03SEP2002

**STE** TE Connectivity

NAME: TERMINAL BLOCK VERTICAL PLUG  
 STACKING LEFT HAND  
 5.08mm PITCH

SIZE: A2 CAGE CODE: 00779 DRAWING NO: C-1546105 RESTRICTED TO: 4

MATERIAL: SEE NOTES TOLERANCES UNLESS OTHERWISE SPECIFIED: SEE NOTES


0 PLC ±  
 1 PLC ±0.3  
 2 PLC ±0.25  
 3 PLC ±  
 4 PLC ±  
 ANGLES ±2°  
 FINISH

APVD C.RICHARD 03SEP2002  
 PRODUCT SPEC  
 APPLICATION SPEC  
 WEIGHT -


CUSTOMER DRAWING SCALE 4:1 SHEET 1 OF 2 REV C 4

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

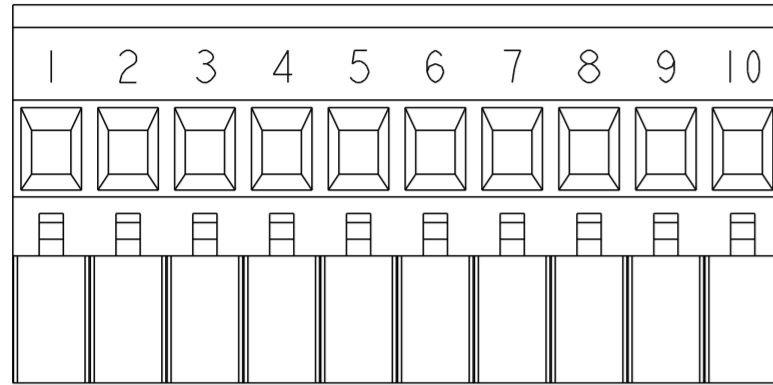


DETAIL J  
SCALE 2:1

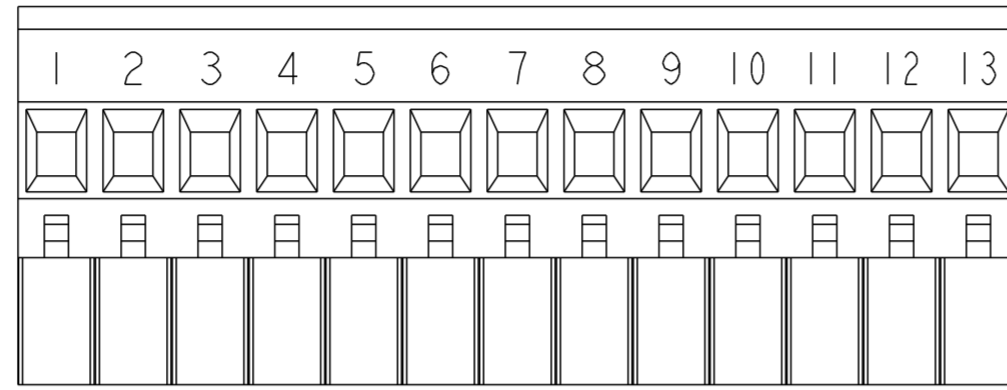


DETAIL K  
SCALE 2:1

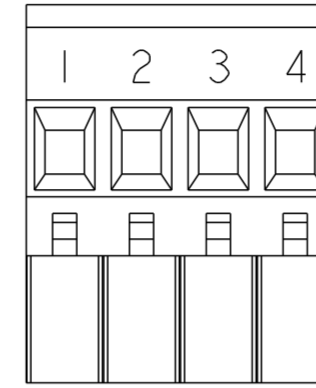


DETAIL L  
SCALE 2:1

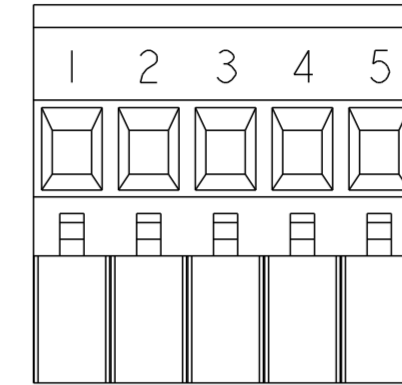


DETAIL M  
SCALE 2:1

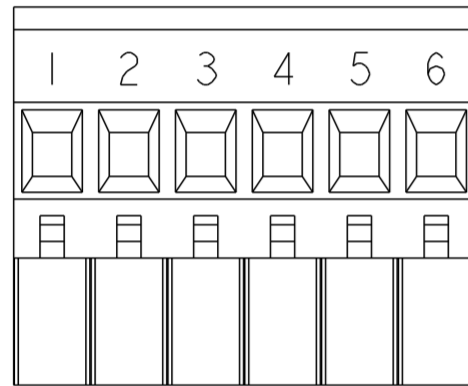


DETAIL N  
SCALE 2:1

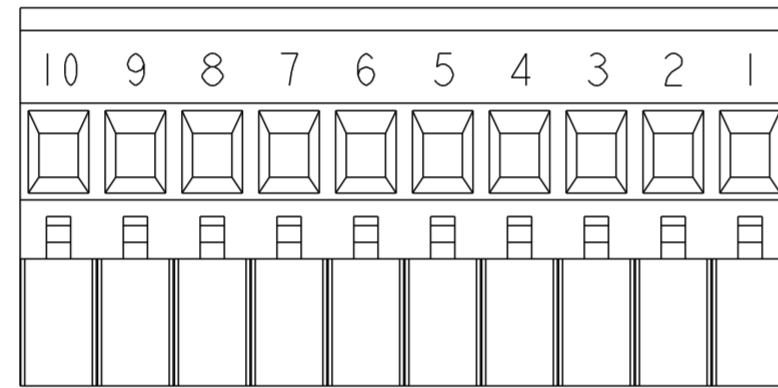


DETAIL P  
SCALE 2:1

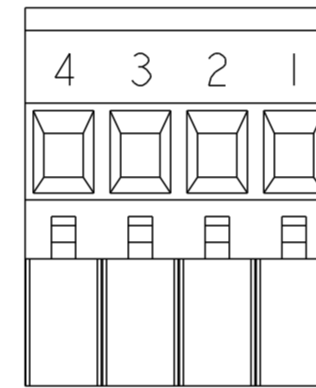


DETAIL R  
SCALE 2:1

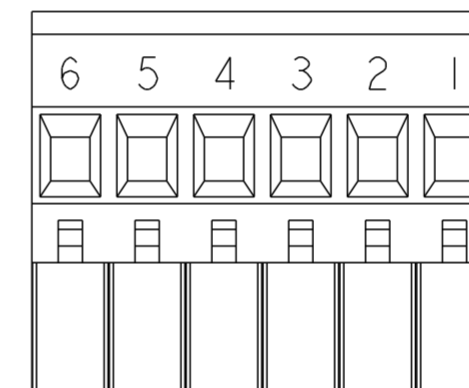


DETAIL S  
SCALE 2:1

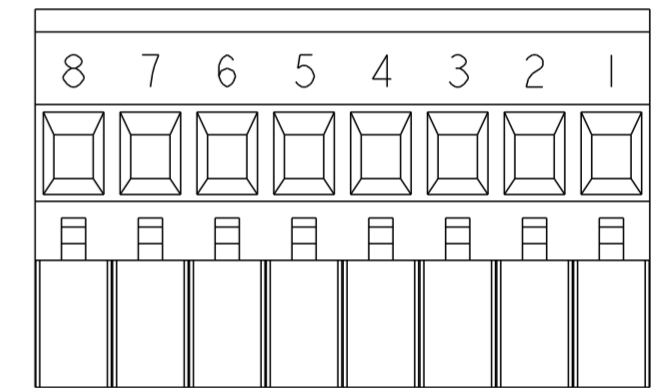


DETAIL T  
SCALE 2:1

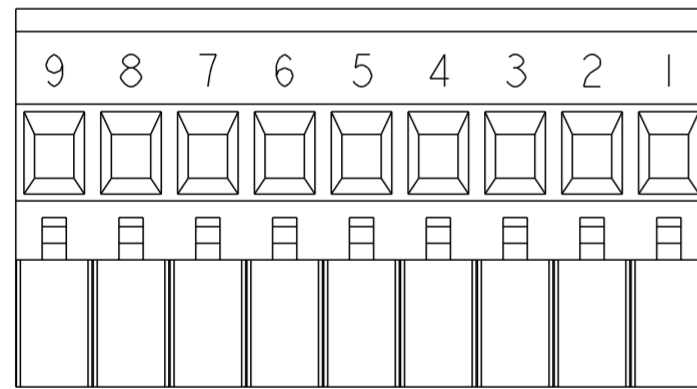


DETAIL U  
SCALE 2:1

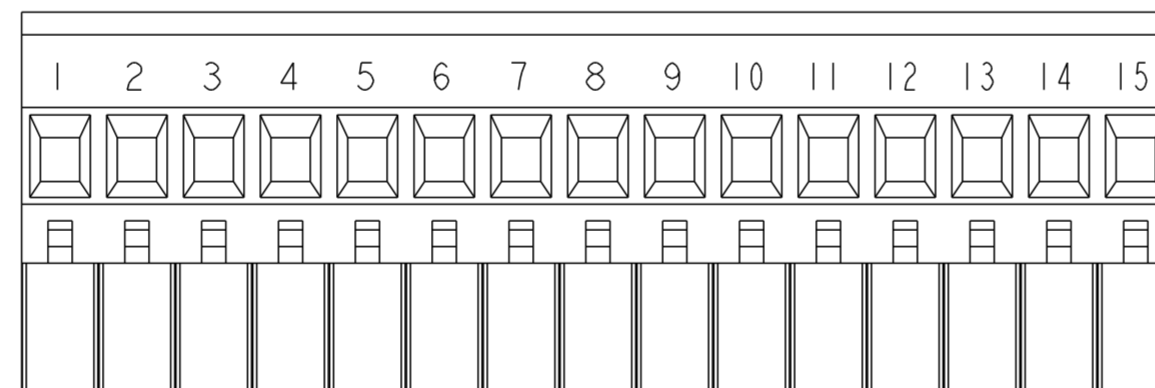


DETAIL V  
SCALE 2:1

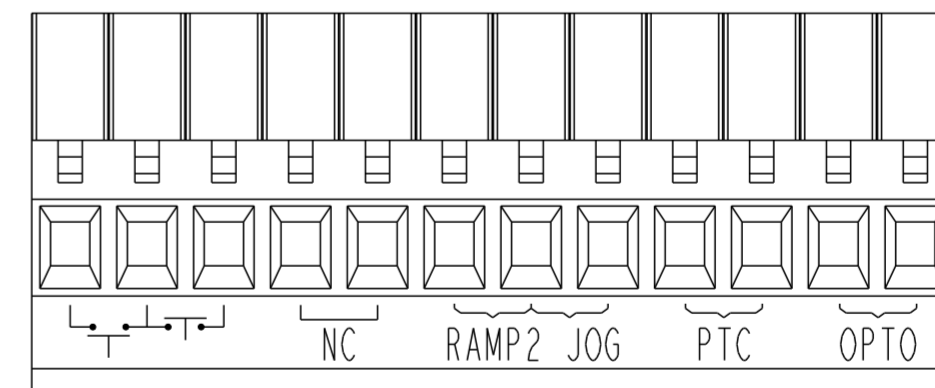

DETAIL W  
SCALE 2:1

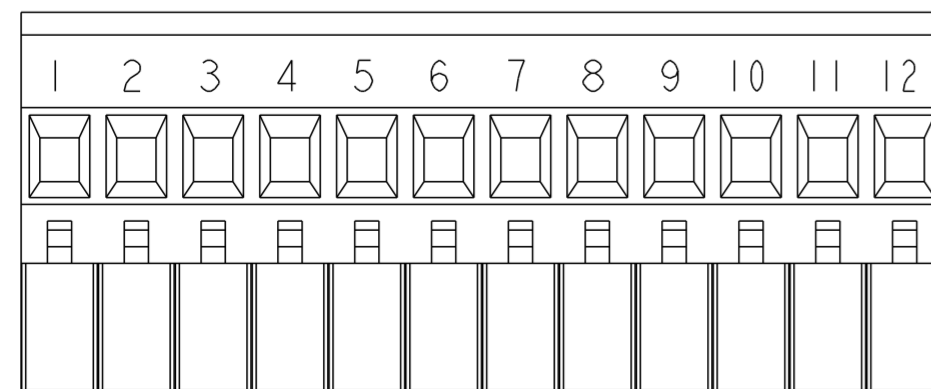

DETAIL X  
SCALE 2:1

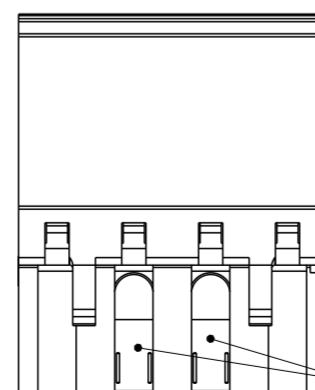

DETAIL Z  
SCALE 2:1

CODING KEYS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. WELDON 03SEP2002	TE Connectivity
DIMENSIONS: mm		CHK C. RICHARD 03SEP2002	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C. RICHARD 03SEP2002	NAME TERMINAL BLOCK VERTICAL PLUG STACKING LEFT HAND 5.08mm PITCH
0 PLC ±		PRODUCT SPEC	SIZE A2
1 PLC ±0.3		APPLICATION SPEC	CAGE CODE 00779
2 PLC ±0.25		WEIGHT	DRAWING NO 1546105
3 PLC ±		CUSTOMER DRAWING	RESTRICTED TO
4 PLC ±		SCALE 3:1	SHEET 2 OF 2
ANGLES ±2°		FINISH	REV C 4
MATERIAL SEE NOTES			
SEE NOTES			