



LOC	DIST	REVISIONS				
CM	0	P	LTR	DESCRIPTION	DATE	APVD
		M1		REVISED PER ECR-16-010553	07AUG2017	SG

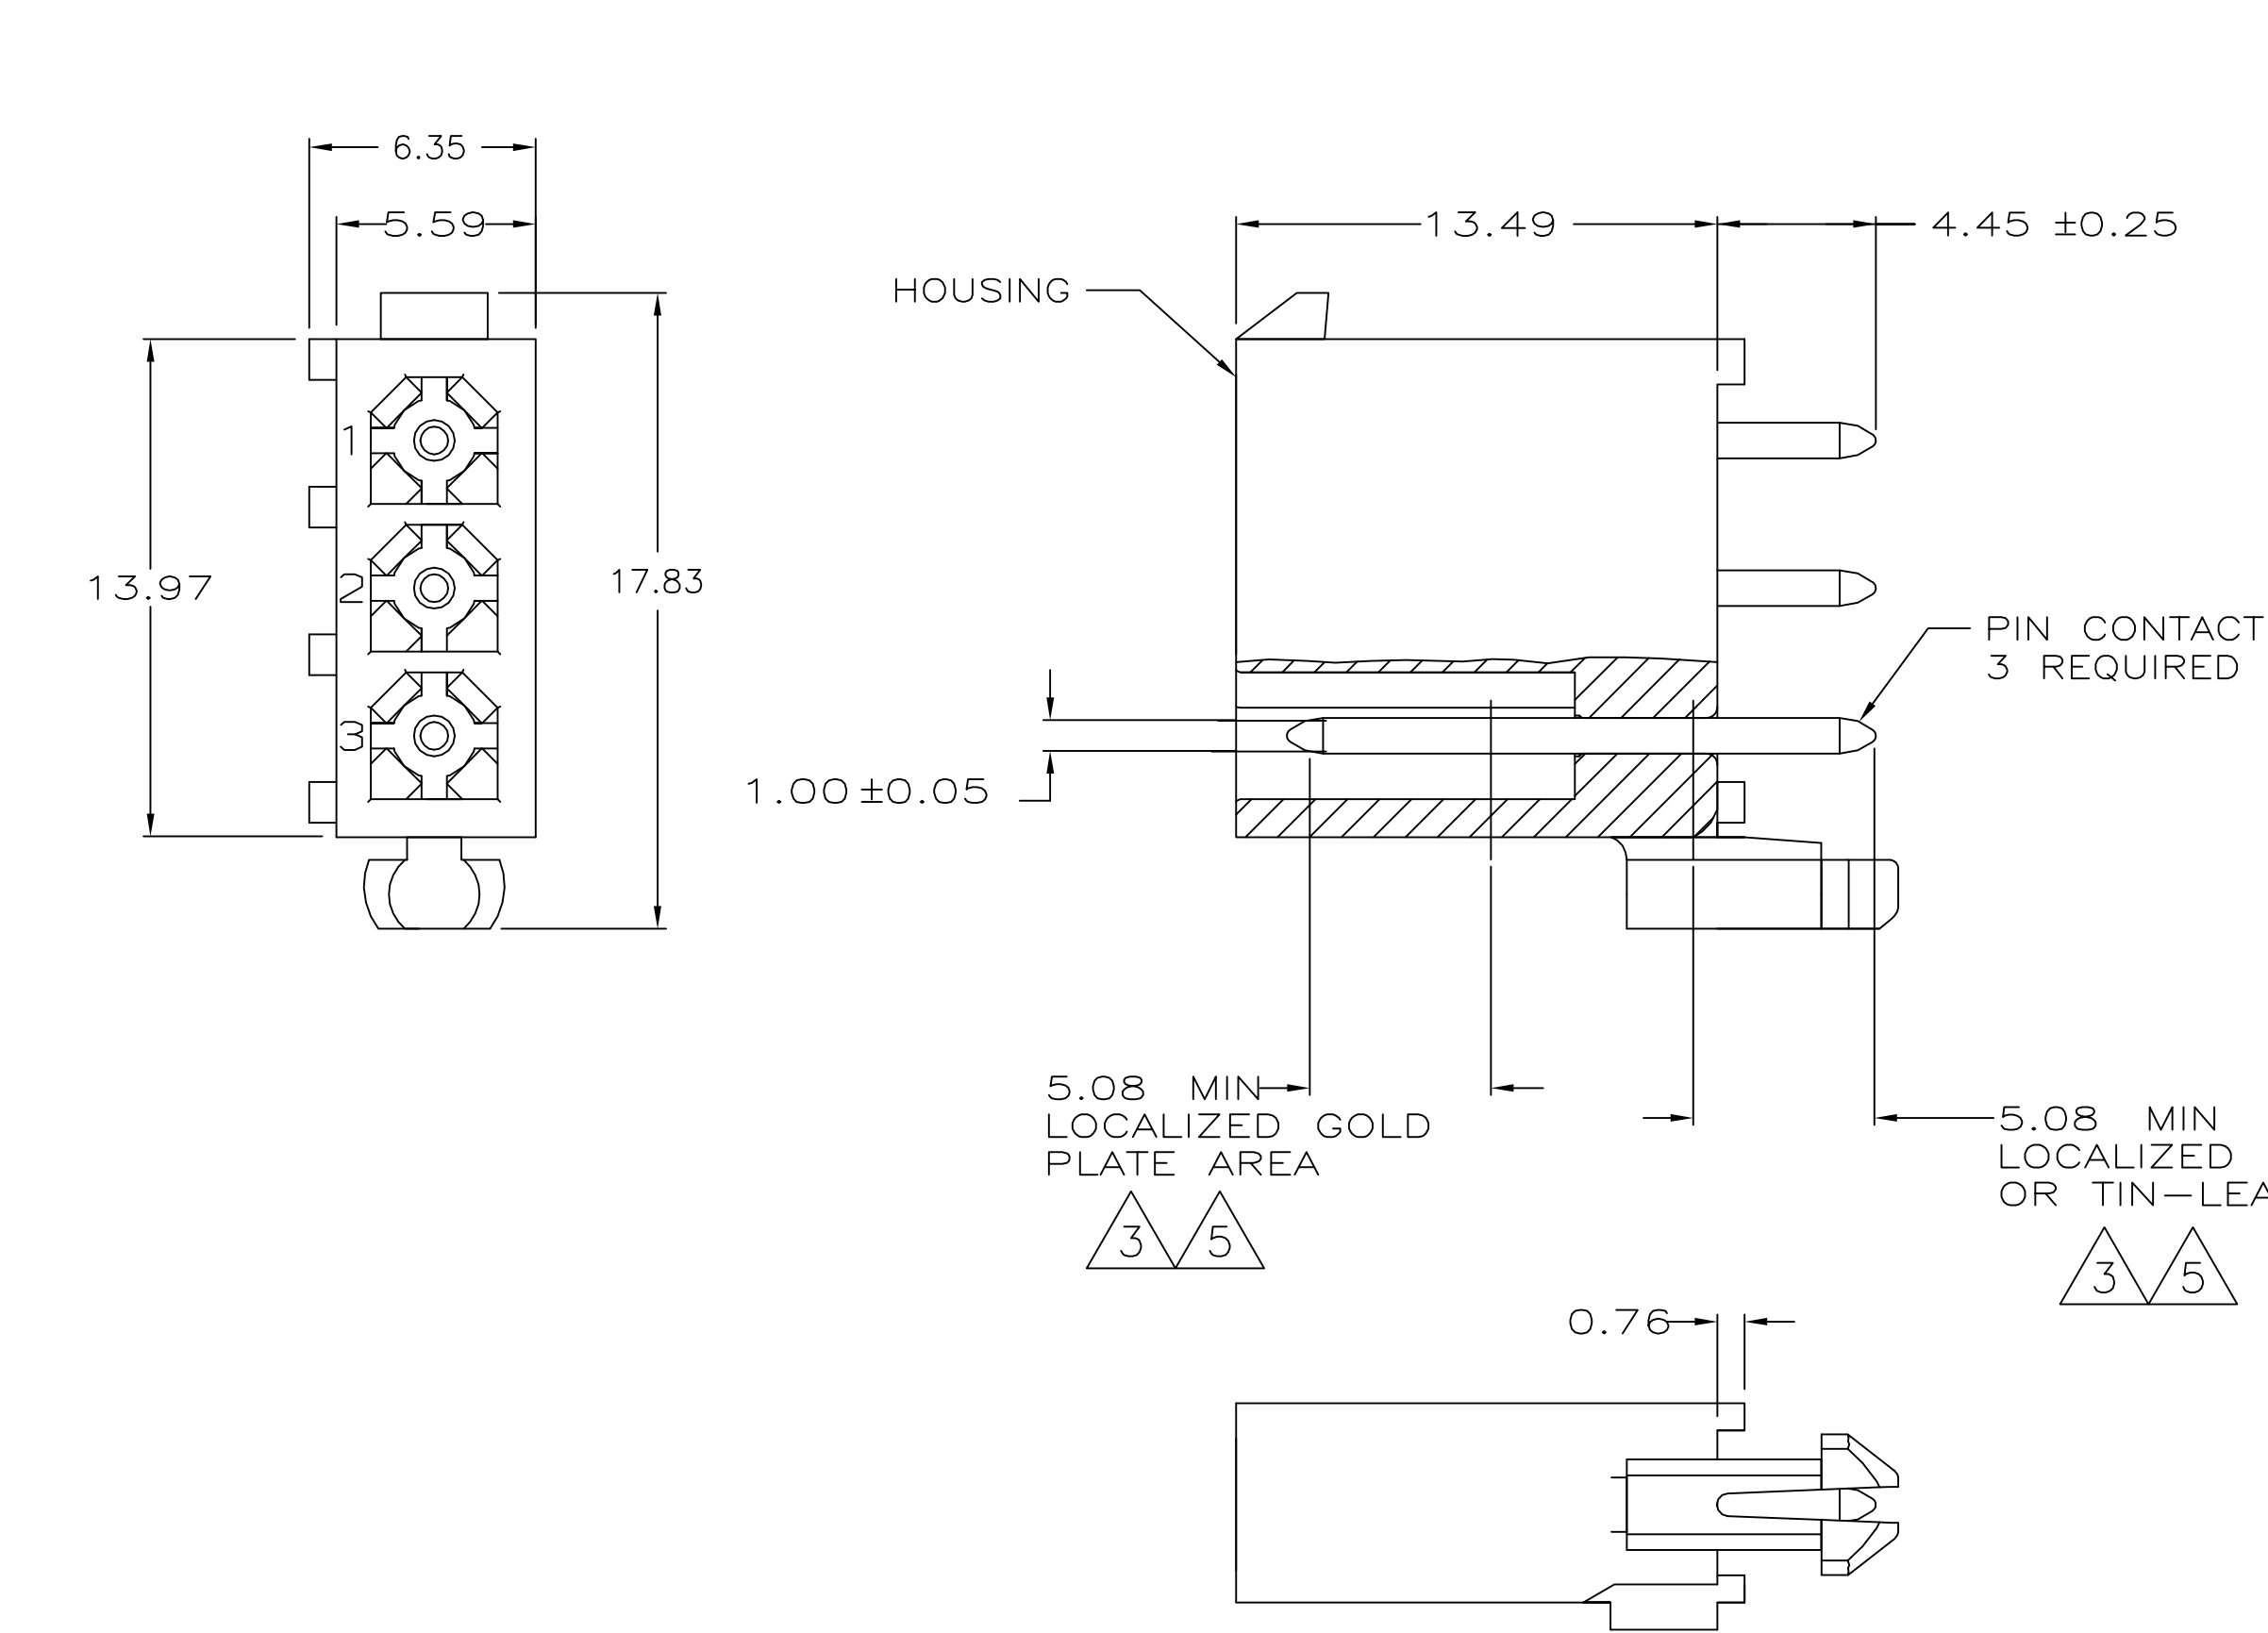

- 1
- PINS TO COMPLY WITH AMP SOLDERABILITY SPEC. 109-11-3.
- 2
- 0.00381 MIN MATTE TIN LEAD PLATE OVER 0.00127 MIN NICKEL.
- 3
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN LEAD IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.
- 4
- 0.00381 MIN MATTE TIN PLATE OVER 0.00127 MIN NICKEL.
- 5
- 0.00076 MIN GOLD PLATE IN THE LOCALIZED PLATE AREA, 0.00381 MATTE TIN IN THE LOCALIZED PLATE AREA, BOTH OVER 0.00127 MIN NICKEL.

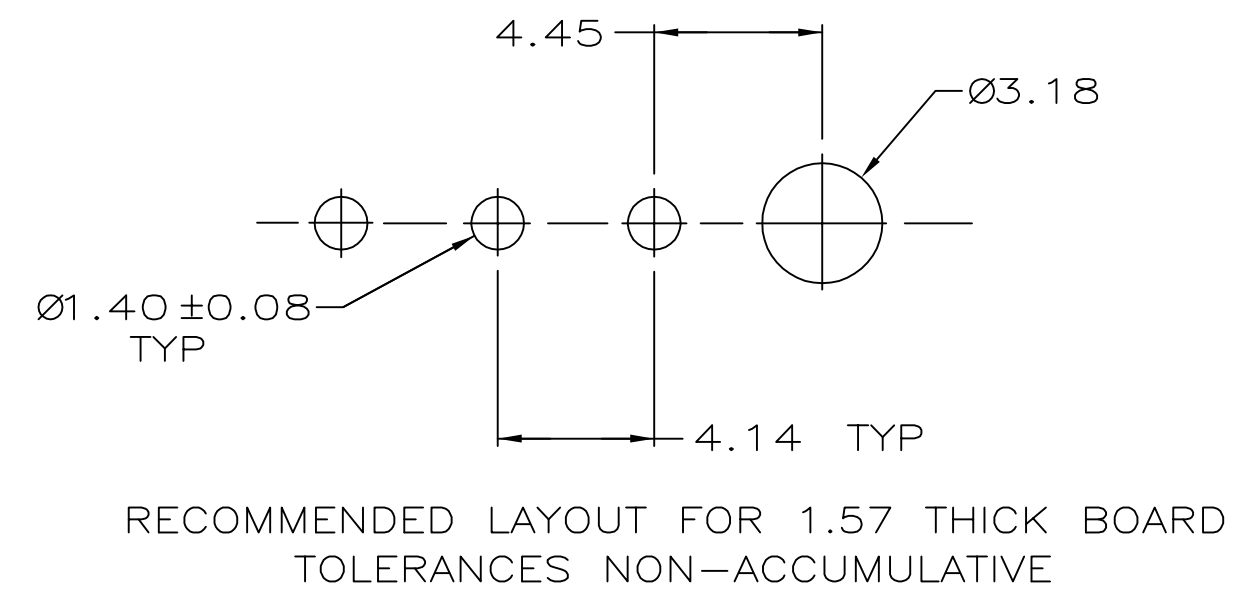

BRASS, TIN	4	NYLON, UL94V-0	BLACK	5-770170-0
BRASS, GOLD	5	NYLON, UL94V-0	WHITE	1-770170-1
BRASS, TIN	4	NYLON, UL94V-0	WHITE	1-770170-0
BRASS, GOLD	3	NYLON, UL94V-0	WHITE	770170-2
BRASS, TIN-LEAD	2	NYLON, UL94V-0	WHITE	770170-1
MATERIAL	FINISH	MATERIAL	COLOR	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S CARPENTER 08JUN05	TE Connectivity		
DIMENSIONS: mm		CHK R JONES 28JUL2003			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R JONES 28JUL2003	NAME		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		APPLICATION SPEC			
2 PLC ± 0.13					
3 PLC ± -					
4 PLC ± -					
ANGLES ± -					
FINISH					
MATERIAL -		WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=770170
		CUSTOMER DRAWING	SCALE 1:1	SHEET 1 of 1	REV M1