

| | |
|--------------------------|--------------------------|
| COIL: 12.0 VDC | |
| WINDING #1 | WINDING #2 |
| 254 OHMS ± 10% @ 25° C | 254 OHMS ± 10% @ 25° C |
| 6.5 VDC MUST OPERATE | 6.5 VDC MUST OPERATE |
| 12.0 VDC NOMINAL VOLTAGE | 12.0 VDC NOMINAL VOLTAGE |

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS @ 20 g's

SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: SET & RESET TIME 5 MS MAX.

BOUNCE 2 MS MAX.


CUST. C. I. I. STD.

CUST. NO. _____

TYPE "LS" RELAY

CUSTOMER DATA SHEET

CONTACTS WILL SWITCH WHEN EITHER COIL IS ENERGIZED WITH POLARITY SHOWN

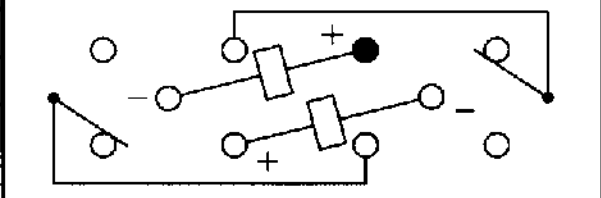

CONTACT RATING: 2 AMPS 28 VDC

RESISTIVE 100,000 OPERATIONS

DR. R.B. 1/20/98 CK. VZ

COMMUNICATIONS INSTRUMENTS, INC.

LSAW-2C-12B