


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0008560109](#)
Status: **Active**
Overview: [kk](#)
Description: KK® Crimp Terminal, 22-30 AWG, Gold (Au), Nickel (Ni) Under Plating

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Product Specification PS-10-07 \(PDF\)](#)

General	
Product Family	Crimp Terminals
Series	2759
Crimp Quality Equipment	Yes
Overview	kk
Product Name	KK®
Physical	
Gender	Female
Material - Metal	Brass
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Packaging Type	Reel
Plating min: Mating (µin)	15
Plating min: Mating (µm)	0.375
Plating min: Termination (µin)	2
Plating min: Termination (µm)	0.05
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.57mm (.062") max.
Wire Size AWG	22, 24, 26, 28, 30
Wire Size mm²	N/A
Material Info	
Old Part Number	2759-(550)B
Reference - Drawing Numbers	
Product Specification	PS-10-07
Sales Drawing	SD-2759

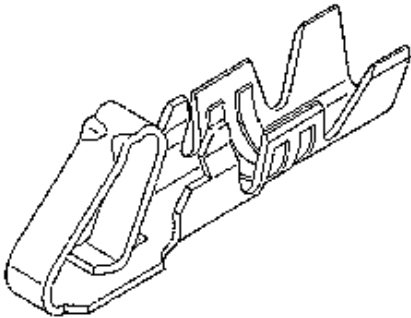

Series
image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Halogen-Free



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[2759Series](#)


Use With
[2695](#) , [5051](#) , [6745](#) , [41895](#)

Application Tooling FAQ	
<i>Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.</i>	
Global	
Description	Product #
Mini-Mac™	0638882100
Applicator, Use with Small Wire Insulation Diameter	
Mini-Mac™	0638882000
Applicator, Use with Large Wire Insulation Diameter	
Extraction Tool	0011030022
Terminator Die	0011402265


This document was generated on 05/17/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


CARRIER VIEW



SELECT GOLD LOCATION




CRIMP DETAIL






CRIMPED TERMINAL 2759-IP90)LC IS USED WITHOUT WIRE AND IS INSERTED INTO HOUSING TO PROVIDE TENSION WHEN ASSEMBLED TO HEADERS DURING SHIPMENT.

(9.70+.38)
.382+.015

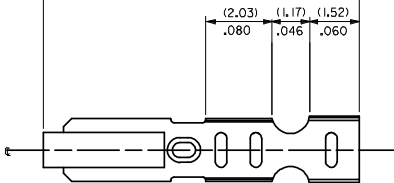


(1.07)
.042

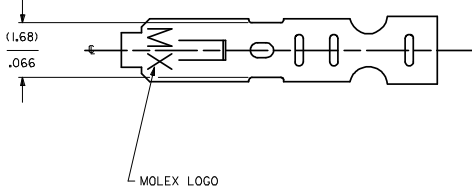


NOTES

1. MATERIAL
(0.203±0.010)/.0080±.0004 THICK BRASS
2. FINISH
102 - OVERALL TIN: (0.00508)/.000200 MIN. TIN OVER
(0.00254)/.000100 MIN. COPPER
122 - OVERALL TIN: (0.00381)/.000150 MIN. TIN OVER
(0.00076)/.000030 MIN. NICKEL
*P909 - OVERALL HOT TIN DIP (0.00254)/.000100 MIN.
550 - SELECT GOLD (0.00038)/.000015 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030 MIN.
555- SELECT GOLD (0.00038)/.000015 MIN.
OVERALL NICKEL UNDERPLATE: (0.00076)/.000030
558 - SELECT GOLD: (0.00076)/.000030 MIN.
OVERALL GOLD FLASH: (0.00005)/.000002 MIN.
OVERALL NICKEL UNDERPLATE: (0.00127)/.000050 MIN.
*THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS
DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC."
CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD PLATING.
3. PRODUCT SPEC: PS-10-07
4. PACKAGING SPECIFICATION: NONE
5. CRIMP IS FOR 22-30 GA WIRE WITH (1.57)/.062 DIA INSULATION MAX.
6. INSERTION FORCE OF TERMINAL INTO (2.54)/.100 CENTERLINE CONNECTOR IS 2.5 LBS. MAX
7. TERMINALS WILL RETAIN 8 LBS PULL FOR 1 MIN. IN A (2.54)/.100 CENTERLINE HOUSING.
8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES
WITHIN HALF THE TOTAL TOLERANCE.
9. CODE LETTER PRECEDING PART NO. DESIGNATES MANUFACTURING LOCATION.
I=IRELAND
10. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.



SECTION A-A
BACKGROUND OMITTED



SECTION B-B
BACKGROUND OMITTED

2759-(***) *
FORM
L=LOOSE
C=LOOSE CRIMPED
A=CHAIN PER ES-339-A
B=CHAIN PER ES-339-B
PLATING
SEE NOTE 2

SHREV 1AS5 2AS4				UPDATE DIMS REC NO: UCP2008-2190 DATE: 2008/03/17 FOR: DFWKABER DATE: 2008/03/18 BY: CHICKA SCHMIDT DATE: 2008/03/24 APPROVED: T				QUALITY SYMBOLS ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED) <table><thead><tr><th></th><th>mm</th><th>INCH</th></tr></thead><tbody><tr><td>4 PLACES</td><td>± ---</td><td>± ---</td></tr><tr><td>3 PLACES</td><td>± ---</td><td>± .010</td></tr><tr><td>2 PLACES</td><td>± 0.25</td><td>± .014</td></tr><tr><td>1 PLACE</td><td>± 0.36</td><td>± ---</td></tr><tr><td colspan="3">ANGULAR ± 1/2°</td></tr></tbody></table>					mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± .010	2 PLACES	± 0.25	± .014	1 PLACE	± 0.36	± ---	ANGULAR ± 1/2°			DIMENSION STYLE MM/IN DRAWN BY DATE SAMIEC 07/28/87 CHECKED BY DATE PATEL 07/28/87 APPROVED BY DATE LENZ 07/28/87 MATERIAL NO. SEE CHART SIZE THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				SCALE --- DESIGN UNITS INCH THIRD ANGLE PROJECTION		TITLE CRIMP TERMINAL 22-30 GA WIRE MOLEX MOLEX INCORPORATED DOCUMENT NO. SD-2759 SHEET NO. 1 OF 2			
	mm	INCH																																							
4 PLACES	± ---	± ---																																							
3 PLACES	± ---	± .010																																							
2 PLACES	± 0.25	± .014																																							
1 PLACE	± 0.36	± ---																																							
ANGULAR ± 1/2°																																									

[illegible]