




## REVISIONS

| P | LTR | DESCRIPTION   | DATE      | DWN | APVD |
|---|-----|---------------|-----------|-----|------|
|   | A   | ECO-17-009760 | 04JUL2017 | PV  | AP   |


a) Part as supplied.

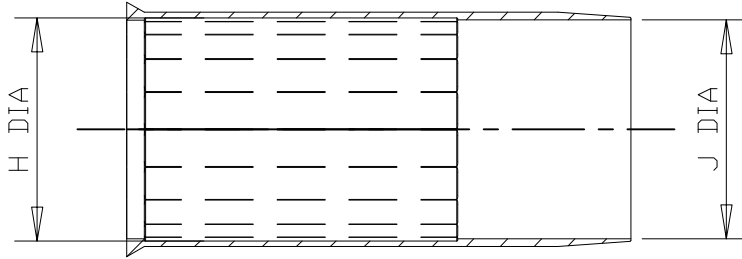

b) Part after unrestricted recovery.

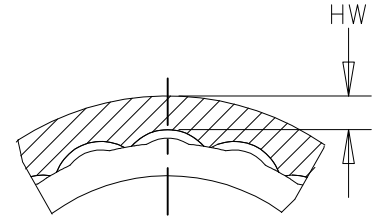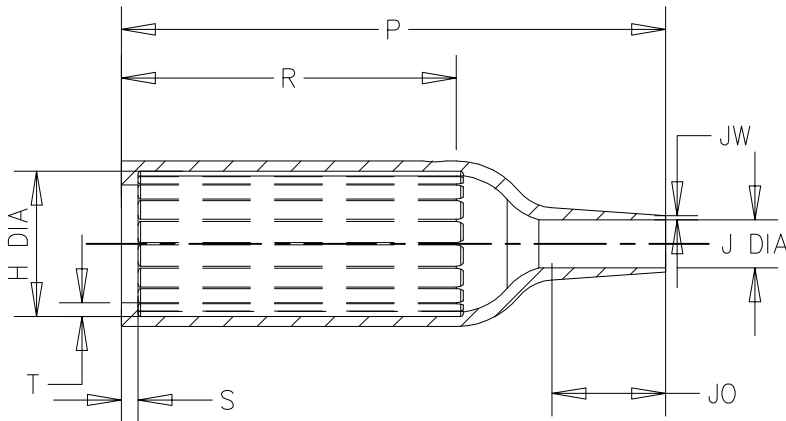

DETAIL VIEW



| Part No.      | H            |                | J            |               | P             | R            | S            | T            | JO             | HW           | JW           |
|---------------|--------------|----------------|--------------|---------------|---------------|--------------|--------------|--------------|----------------|--------------|--------------|
|               | Min<br>a     | Max<br>b       | Min<br>a     | Max<br>b      | ±10%<br>b     | ±10%<br>b    | ±10%<br>b    | ±10%<br>b    | ±10%<br>b      | ±20%<br>b    | ±20%<br>b    |
| 202K121-25L-0 | 24<br>[.94]  | 10.4<br>[.41]  | 24<br>[.94]  | 5.6<br>[.22]  | 38<br>[1.50]  | 21<br>[.83]  | 3.0<br>[.12] | 1.0<br>[.04] | 8.5<br>[.33]   | 1.3<br>[.05] | 0.9<br>[.04] |
| 202K132-25L-0 | 30<br>[1.18] | 14.2<br>[.56]  | 30<br>[1.18] | 5.9<br>[.23]  | 55<br>[2.17]  | 32<br>[1.26] | 3.0<br>[.12] | 1.0<br>[.04] | 11.5<br>[.45]  | 1.3<br>[.05] | 1.0<br>[.04] |
| 202K142-25L-0 | 31<br>[1.22] | 18.0<br>[.71]  | 31<br>[1.22] | 7.1<br>[.28]  | 67<br>[2.64]  | 35<br>[1.38] | 3.0<br>[.12] | 1.0<br>[.04] | 17.0<br>[.67]  | 1.2<br>[.04] | 1.0<br>[.04] |
| 202K153-25L-0 | 36<br>[1.42] | 22.4<br>[.88]  | 36<br>[1.42] | 8.4<br>[.33]  | 80<br>[3.15]  | 42<br>[1.65] | 3.0<br>[.12] | 1.0<br>[.04] | 19.5<br>[.77]  | 1.5<br>[.06] | 1.0<br>[.04] |
| 202K163-25L-0 | 43<br>[1.69] | 28.2<br>[1.11] | 43<br>[1.69] | 9.9<br>[.39]  | 99<br>[3.90]  | 61<br>[2.40] | 3.0<br>[.12] | 1.7<br>[.07] | 21.0<br>[.83]  | 2.0<br>[.08] | 1.2<br>[.05] |
| 202K174-25L-0 | 60<br>[2.36] | 35.1<br>[1.38] | 60<br>[2.36] | 15.7<br>[.62] | 130<br>[5.12] | 72<br>[2.83] | 3.0<br>[.12] | 1.7<br>[.07] | 39.0<br>[1.54] | 2.3<br>[.09] | 1.5<br>[.06] |
| 202K185-25L-0 | 66<br>[2.60] | 44.5<br>[1.75] | 66<br>[2.60] | 16.8<br>[.66] | 170<br>[6.69] | 90<br>[3.54] | 3.0<br>[.12] | 2.0<br>[.08] | 51.5<br>[2.03] | 1.8<br>[.07] | 2.0<br>[.08] |

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

COPYRIGHT 2017 TE Connectivity



|                                                                                                                              |  |                               |                    |                                    |                    |  |  |
|------------------------------------------------------------------------------------------------------------------------------|--|-------------------------------|--------------------|------------------------------------|--------------------|--|--|
| DIMENSIONS:<br>mm [INCHES]                                                                                                   |  | DWN<br>P. VU<br>04JUL2017     | MATERIAL<br>-25L   |                                    | FINISH<br>-        |  |  |
| TOLERANCES UNLESS<br>OTHERWISE SPECIFIED:<br><br>0 PLC ± -<br>1 PLC ± -<br>2 PLC ± -<br>3 PLC ± -<br>4 PLC ± -<br>ANGLES ± - |  | CHK<br>N. NAGAR<br>04JUL2017  |                    |                                    |                    |  |  |
|                                                                                                                              |  | APVD<br>A. POOLE<br>04JUL2017 |                    |                                    |                    |  |  |
|                                                                                                                              |  | PRODUCT SPEC<br>-             |                    | NAME<br>BOOT, STRAIGHT<br>WITH LIP |                    |  |  |
|                                                                                                                              |  | APPLICATION SPEC<br>-         |                    |                                    |                    |  |  |
| WEIGHT<br>-                                                                                                                  |  | SIZE<br>A4                    | CAGE CODE<br>00779 | DRAWING NO<br>C-202K1XX-25L-0      | RESTRICTED TO<br>- |  |  |
| CUSTOMER DRAWING                                                                                                             |  |                               | SCALE<br>DNS       | SHEET<br>1 of 2                    | REV<br>A           |  |  |

