



Ø16.00±.10
[.630±.004 in]



RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS
10.0 [.315 in]







SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER PLATED COPPER
- RATING: 2A 48VDC
- ELECTRIC LIFE: 200,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
- INSULATION RESISTANCE: 1,000 MΩ MIN.
- DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- OPERATING TEMP.: -20°C to 55°C
- TRAVEL: 1.8mm
- ▲ DENOTES CRITICAL PARAMETER.
- ILLUMINATION VOLTAGE: BASE VOLTAGE, 2.8V 20mA
- ILLUMINATION COLOR: WHITE (FORWARD), WHITE (REVERSE)
- HARDWARE SUPPLIED: O-RING AND HEXNUT (NOT SHOWN)

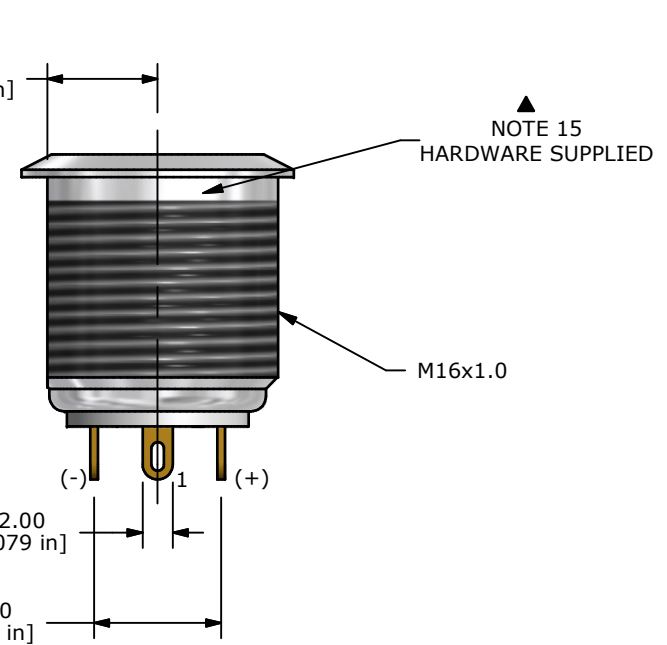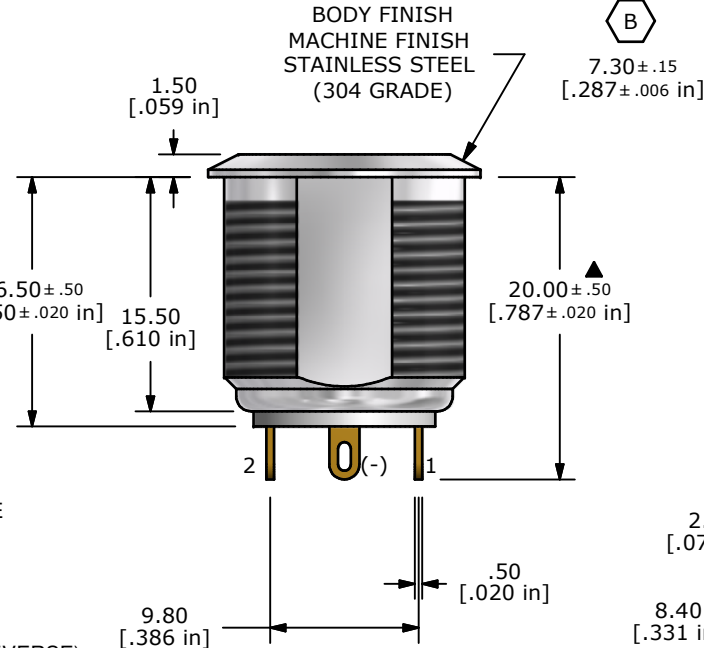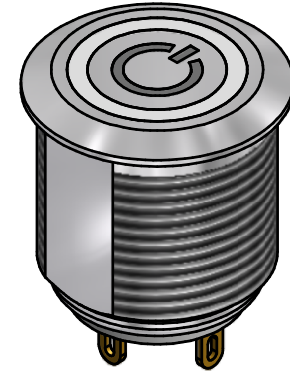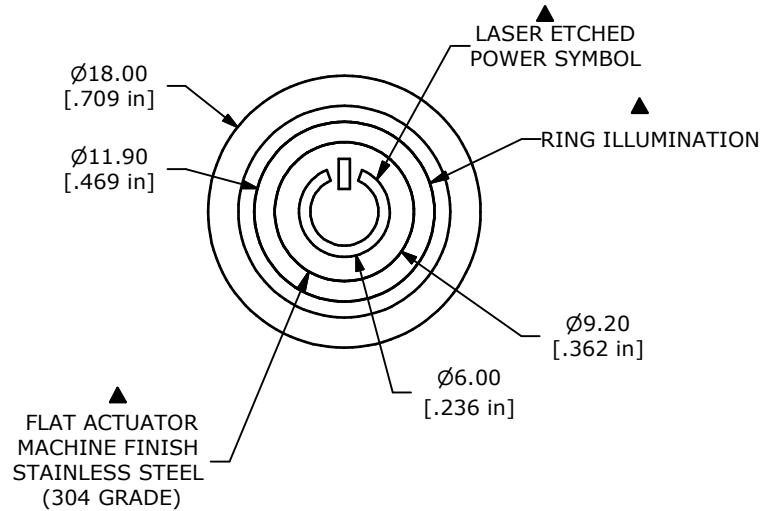

B	21174	ADD FLAT	7/12/13	EBP
A	21150	RELEASE FOR PRODUCTION	6/10/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE PV6F240SS-301-M01

SCALE 2:1

DATE 6/10/2013

DR BGL

DWG 52-PV6F240SS301M01

REV B