
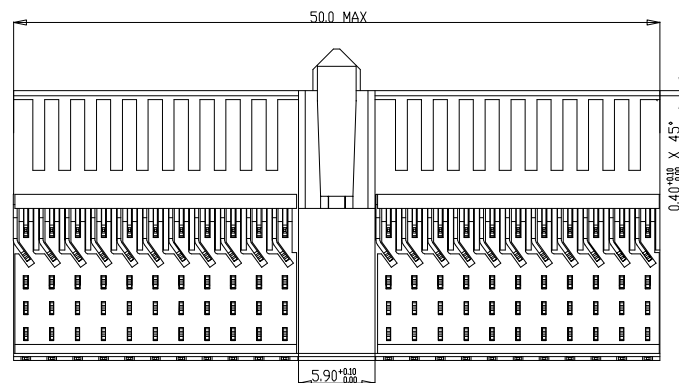


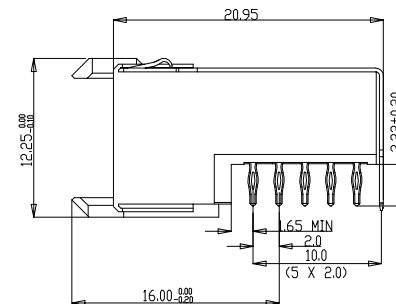


CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

INSULATION RESISTANCE : 10^4 M Ω MIN

LEAD FREE INDICATOR : LF- LEAD FREE

1.  PERFORMANCE LEVEL INDICATOR
(REF. DWG No. BSC.201844.003)
2. THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA.201.572001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

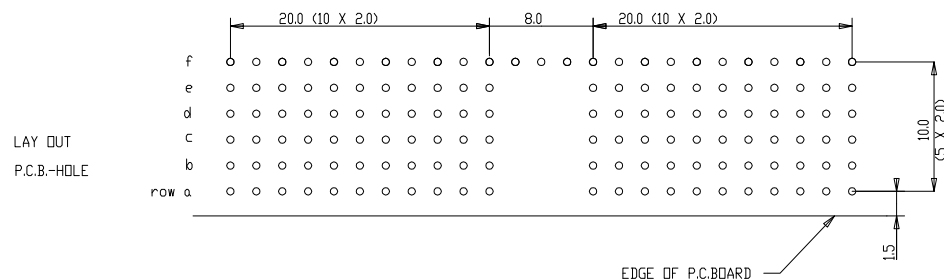

				Material		Spec ref				
				Mat code		tolerance				
				Heat/treat		REC A ± 0.01 REC B ± 0.01 REC C ± 0.01				
				Plating/Finish		projection 				
						MM →				
rev	ecn no	dr	date	dr	4 2 92	J V B			size	Scale
A	CONNECTION CHANGING	KN	14-9-01	Eng			Product family	MILLIPACS	A1	5.000
B	105-093	MENT	02/06/05	Chr			Model Name	HM20P05A10F	ECN	
C	10505-0278	Kasoni	02/08/05	Apr			Model Revision		REL Level	
D	0787-0362	Kasoni	05/09/07			MPACS 5+2R RCP CONN TYPE A			B.S.C. 01444,031	Rev. E
E	0200-0010	NZ	05/30/10							
	--	--	--							
07	CONNECTION CHANGING	KN	09/08/01	Pro/E File	catalog no		HM20P05A10F----	CUSTOMER DRAWING	sheet 1 of 1	