
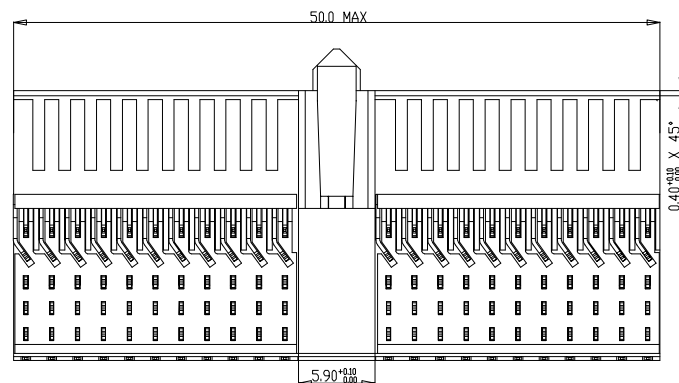


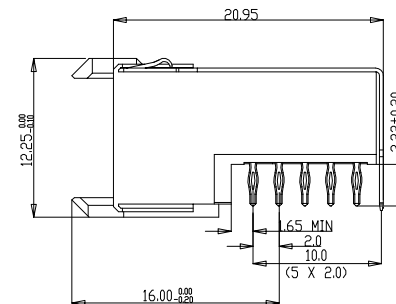

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)

INSULATION RESISTANCE $\times 10^4 \text{ M}\Omega \text{ MIN}$

LEAD FREE INDICATOR : LF- LEAD FREE

1.  PERFORMANCE LEVEL INDICATOR
(REF. DWG No. BSC.201844.003)
2. THIS PRODUCT IS CSA APPROVED
THIS PRODUCT IS UL RECOGNISED
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA.201.572001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE
AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

