




MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.



Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.

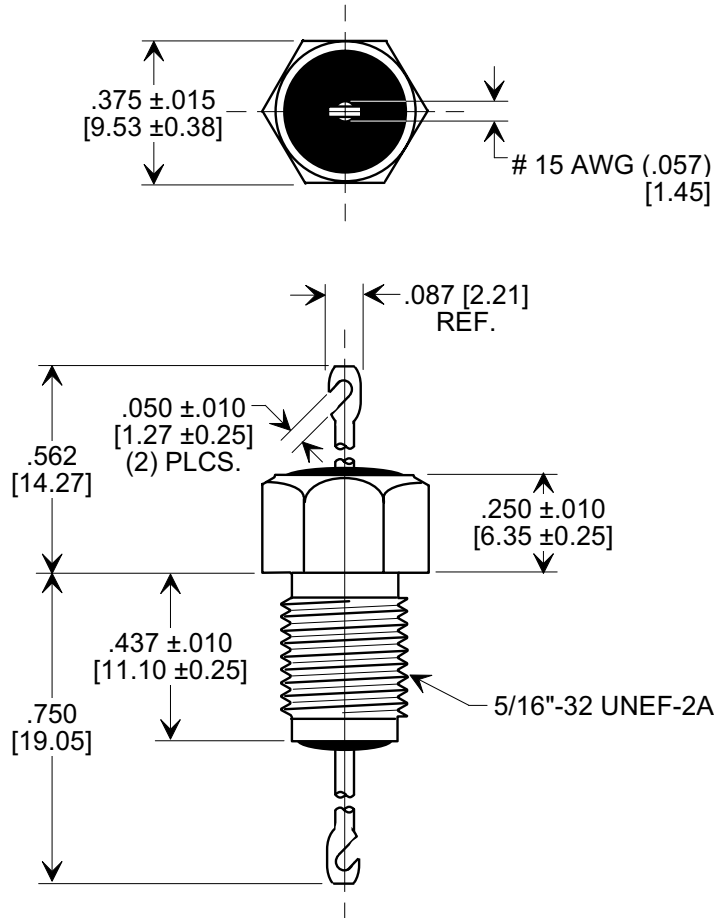

NOTES:

1. SUPPLIED WITH HEX NUT AND INTERNAL TOOTH LOCK WASHER.
2. PARTS WILL BE MARKED M15733/61.

| | | | | | | | | |
|----------------------|----------------------|----------------|------------------------------|-------------|---|------------|----------|-----------|
| 2000 | 500 VDC / 350 VAC | 25 AC | I.R. MIN. @ 100 (VDC.) | DWV | ---- | 55 | 70 | 70 |
| | 125 °C | | | | 10 MHz | 100 MHz | 1 GHz | 10 GHz |
| MIN. CAP. (pF) | WORKING VOLTAGE | CURRENT (A) | 10 G Ω | 1250 VDC | MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD -220 | | | |

| | | | | | | | |
|---|------------------------|-----------------------------------|--|---|-----------------|--|--|
| X-2015 Rev-0 REVISION RECORD Original Release C.O. 20070423-1-01 | 0 | TUSONIX TUCSON, ARIZONA | TOLERANCES unless otherwise specified 2 PLC. DECIMAL ± N/A 3 PLC. DECIMAL ± .031 [0.79] | Title MIL-15733/61-0004 BUSHING STYLE FILTER | | | |
| | ANGLES ± N/A | | Drawn S.M. 04-23-07 | Scale 2 X | | | |
| | Approved R.L. 04-23-07 | | A | | 4206-501 | | |
| | | | | | | | |