



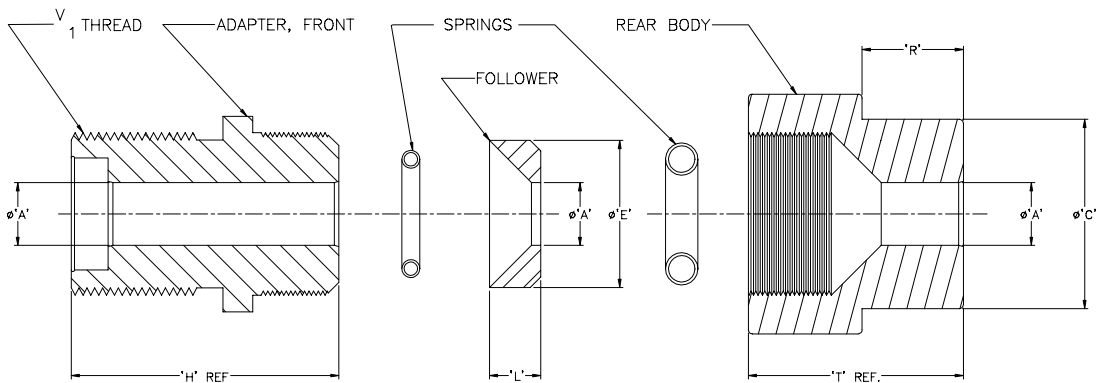

REVISIONS		DATE	APPROVED
LTR	DESCRIPTION		
NC	RELEASED TO DOCUMENT CONTROL PER DCR #SG87145	12/12/97	GMR



ADAPTER, FRONT			
SIZE	'A' DIA +0.015 -0.000	'H' REF	V1 THREAD-MALE
A-SM	.312	1.84	7/8-12UN-2A
A	.406	1.56	7/8-12UN-2A
B	.515	1.56	1.0-12UNF-2A
C	.640	1.56	1 1/8-12UNF-2A
D	.750	1.91	1 1/4-12UNF-2A
E	.812	1.91	1 1/4-12UNF-2A
F	.843	1.91	1 5/16-12UN-2A
G	.853	2.03	1 1/2-12UNF-2A
J	1.062	2.03	1 5/8-12UN-2A
K	1.172	2.34	1 3/4-12UN-2A
L	1.265	2.34	1 13/16-12UN-2A
M	1.406	2.34	2-12UN-2A
N	1.515	2.34	2 1/16-12UNS-2A
P	1.625	2.34	2 3/16-12UNS-2A
R	1.750	2.56	2 5/16-12UNS-2A
S	1.875	3.19	2 11/16-12UNS-2A
T	2.062	3.19	2 7/8-12UNS-2A
V	2.167	3.19	3.00-12UNS-2A
W	2.312	3.19	3 1/8-12UNS-2A

FOLLOWER			
SIZE	'A' DIA +0.015 -0.000	'E' DIA +0.005 -0.000	'L' REF
A-SM	.312	.800	.375
A	.406	.800	.250
B	.515	.870	.250
C	.640	.990	.250
D	.750	1.280	.375
E	.812	1.343	.375
F	.843	1.406	.375
G	.853	1.531	.375
J	1.062	1.593	.375
K	1.172	1.718	.375
L	1.265	1.843	.375
M	1.406	1.988	.375
N	1.515	2.093	.375
P	1.625	2.156	.375
R	1.750	2.406	.437
S	1.875	2.593	.437
T	2.062	2.740	.437
V	2.167	2.906	.437
W	2.312	2.990	.437

REAR BODY				
SIZE	'A' DIA +0.015 -0.000	'C' DIA	'R' REF	'T' REF
A-SM	.312	1.100	.550	1.64
A	.406	1.100	.550	1.40
B	.515	1.100	.550	1.40
C	.640	1.100	.550	1.40
D	.750	1.512	.796	1.89
E	.812	1.512	.796	1.89
F	.843	1.512	.796	1.89
G	.853	1.512	.796	1.89
J	1.062	1.512	.796	1.89
K	1.172	2.210	1.093	2.20
L	1.265	2.210	1.093	2.20
M	1.406	2.210	1.093	2.20
N	1.515	2.210	1.093	2.20
P	1.625	3.572	1.625	2.72
R	1.750	3.572	1.625	2.76
S	1.875	3.572	1.625	2.76
T	2.062	3.572	1.625	2.76
V	2.167	3.572	1.625	2.76
W	2.312	3.572	1.625	2.76

SPRINGS		
SPRING SIZE	'ID' ±.045	'OD' REF
A-SM	.312	.780
A	.437	.780
B	.546	.890
C	.656	1.000
D	.781	1.310
E	.843	1.375
F	.875	1.405
G	.984	1.515
J	1.093	1.625
K	1.203	1.735
L	1.297	1.830
M	1.437	1.970
N	1.546	2.075
P	1.655	2.185
R	1.781	2.440
S	1.906	2.565
T	2.093	2.755
V	2.218	2.880
W	2.343	3.000

NOTES:

- CABLE SHIELD GROUNDING ADAPTERS PROVIDE 360° GROUNDING TO OVERALL SHIELDED CABLES. THESE ARE FOR USED AT THE ENTRANCE TO STUFFING TUBES AND ARE AVAILABLE IN A VARIETY OF SIZES TO FIT VARIOUS THREADED ASSEMBLIES.

If this document is printed it becomes uncontrolled.
Check for the latest revision.

SPECIFICATION CONTROL DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: DEC .XXX±.030 DEC .XX±.06 ANGLE ±2°		DATE 97Dec9 DESIGNED C.ROSITANO DRAWN W.C. GAY CHECKED W.C. GAY PROJECT CSO/ASCDI	DATE 97Dec9 THIRD ANGLE PROJECTION DWG. NO. 06090 SCALE NONE	TITLE Raychem CABLE SHIELD GROUNDING ADAPTER WITH MALE THREADS CSO/ASCDI CSO/ASCDI CSO/ASCDI	SHEET NO. 1 OF 1 REV NC
--	--	--	---	--	----------------------------------