

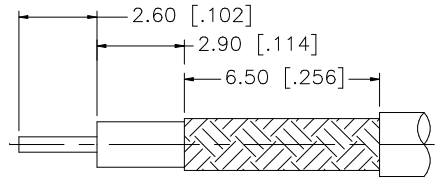
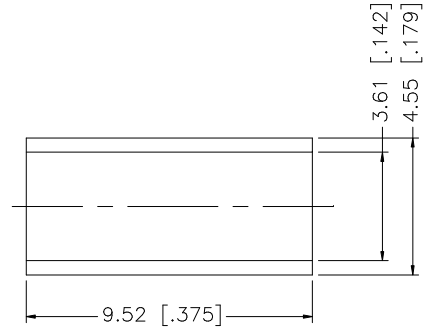


REV.	DATE	DESCRIPTION
C	02/18/03	UPDATE DRAWING FORMAT
D	07/31/05	ADD "DOUBLE BRAID CABLE" TO DESCRIPTION

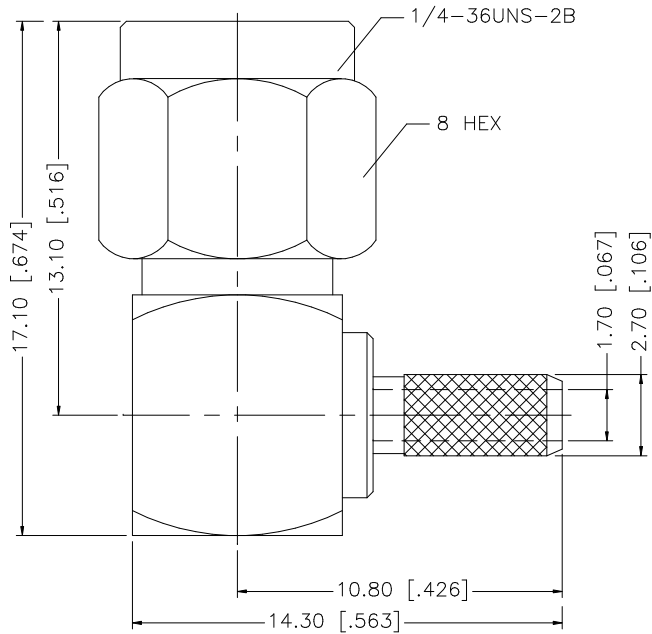

RECOMMENDED
CABLE STRIPPING DIM'S



- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
 2. CONTACT PIN TO SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex							
8	HEAT SHRINK TUBE			BLACK	1	DRAWN		G.R.S.						07/31/05			
7	FERRULE	COPPER		GOLD	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		CHECKED		PART DESCRIPTION SMA R/A CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)							
6	COVER	BRASS		GOLD	1			ISSUED									
5	GASKET	SILICONE		RED	1			SHEET									
4	RETAINER RING	BER. COPPER		NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		1 OF 1		PART NO. 132182							
3	CONTACT PIN	BRASS		GOLD	1												
2	INSULATOR	TEFLON		NATURAL	1												
1	HOUSING/BODY	BRASS		GOLD	1			CAD FILE		DWG. NO. 132182.DWG		REV. D		SIZE A		SCALE NA	
DESCRIPTION		MATERIAL		FINISH	QTY	DO NOT SCALE DRAWING		C:/132/132182.DWG									