


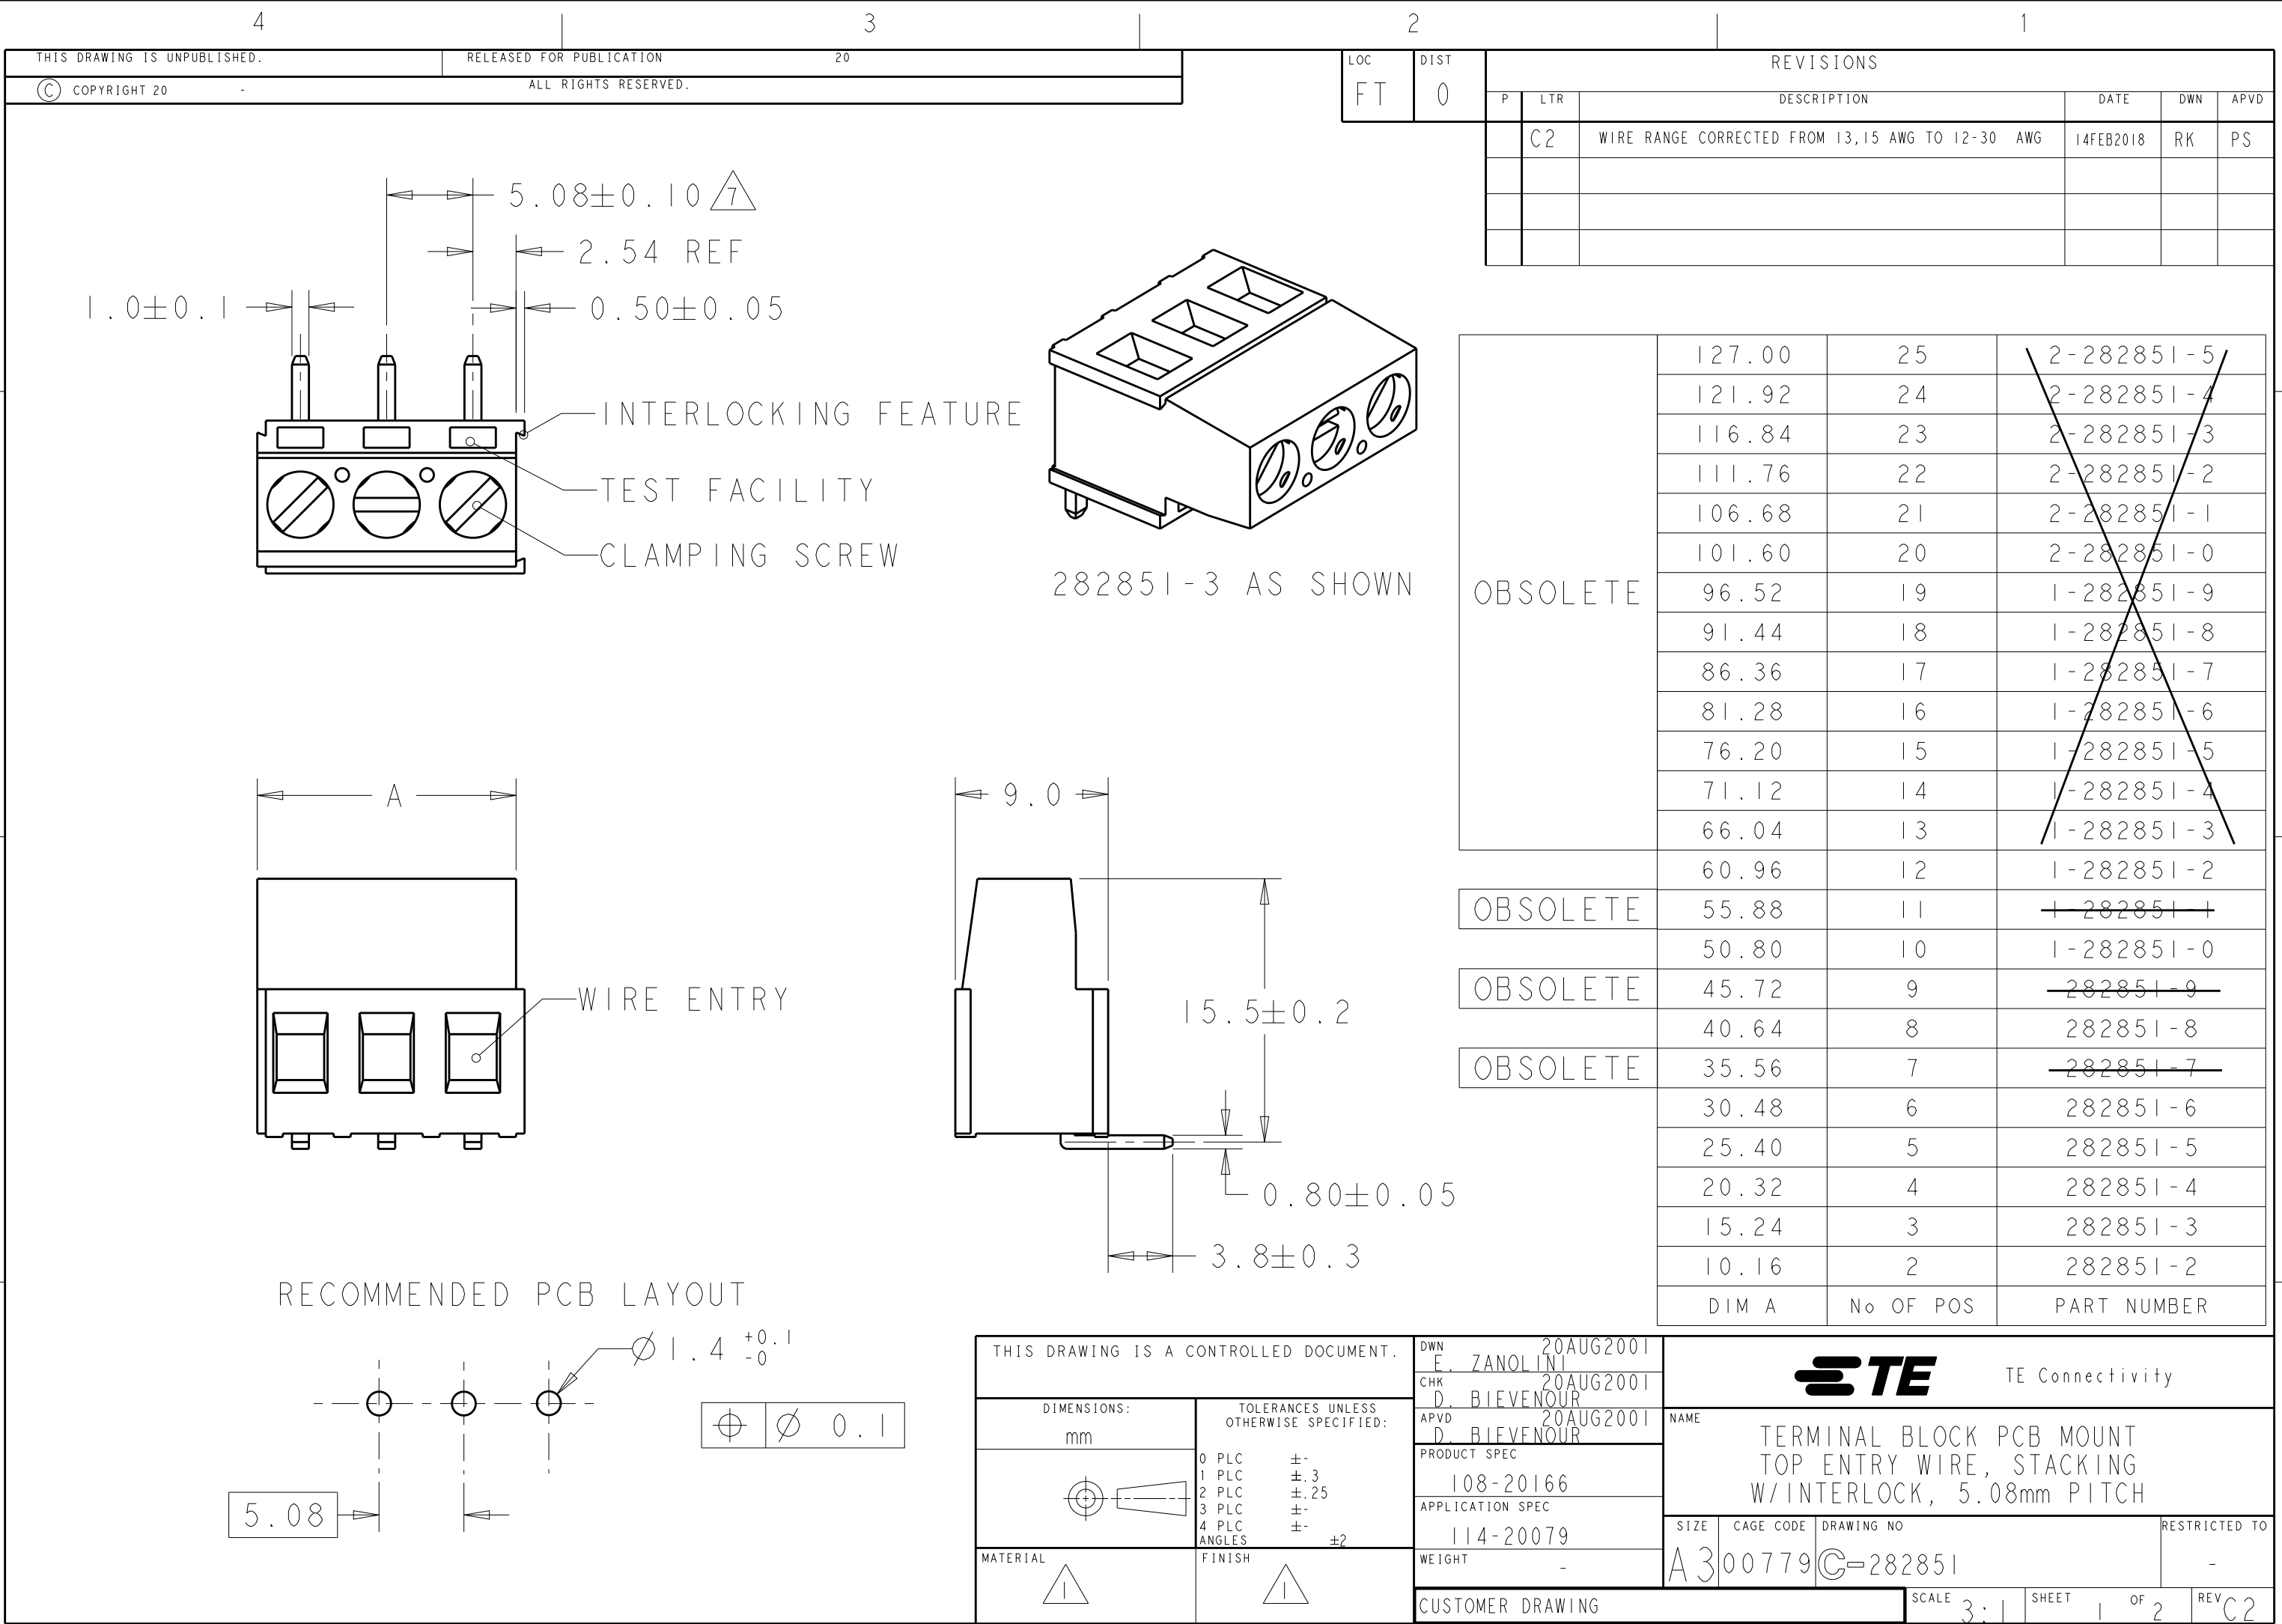

LOC	DIST	REVISIONS				
FT	0	P	LTR	DESCRIPTION	DATE	APVD
			-	SEE SHEET 1	-	-

NOTES:

- 1

MATERIALS AND FINISH
HOUSING: PA 6-6, UL 94-V0, COLOR GREEN.
CLAMP: BRASS, NICKEL PLATED.
TERMINAL: BRASS, TIN PLATED.
CLAMPING SCREW: M3, BRASS, NICKEL PLATED.
- 2

MECHANICAL PROPERTIES
MIN. PC BOARD HOLES DIAMETER : 1,4mm
MAX. PC BOARD THICKNESS : 2,4mm.
RECOMMENDED/HIGHEST TIGHTENING TORQUE: 0,5/0,6 Nm.
- 3


END-TO-END STACKABLE W/INTERLOCK WITHOUT LOSS OF
CENTERLINE SPACING.
- 4

ELECTRICAL PROPERTIES
WIRE RANGE:
- SOLID WIRE : 0,05-2,5mm² (12-30 AWG).
- STRANDED WIRE : 0,05-2,5mm² (12-30 AWG).
MAX. VOLTAGE : 300 V
MAX CURRENT : 24 A
CONTACT RESISTANCE : <15 m Ohm
INSULATION RESISTANCE : >1000 M Ohm (500V DC)
- 5

RECOGNIZED UNDER THE COMPONENT PROGRAM OF
UNDERWRITERS LABORATORIES INC. FILE NO E60677.
- 6

IMQ CERTIFICATE WITH SURVEILLANCE IN CONFORMITY
WITH IEC 998-1/998-2-1.
- 7

NOT CUMULATIVE TOLERANCE.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN E. ZANOLINI 20AUG2001	 TE Connectivity		
DIMENSIONS: mm		CHK D. BIEVENOUR 20AUG2001			
		APVD D. BIEVENOUR 20AUG2001	NAME TERMINAL BLOCK PCB MOUNT TOP ENTRY WIRE, STACKING W/INTERLOCK, 5.08mm PITCH		
		PRODUCT SPEC -			
MATERIAL -		FINISH -	SIZE A300779C-282851		
		0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-			
		WEIGHT -	RESTRICTED TO -		
		CUSTOMER DRAWING	SCALE 3:1 SHEET 2 OF 2 REV C2		