


PART NUMBER	ROWS	E	POWER					E
			P5	P4	P3	P2	P1	
10066440-DGC0200LF	D		FM	FM	FM	FM	FM	
	C							
	B							
	A							


A

A

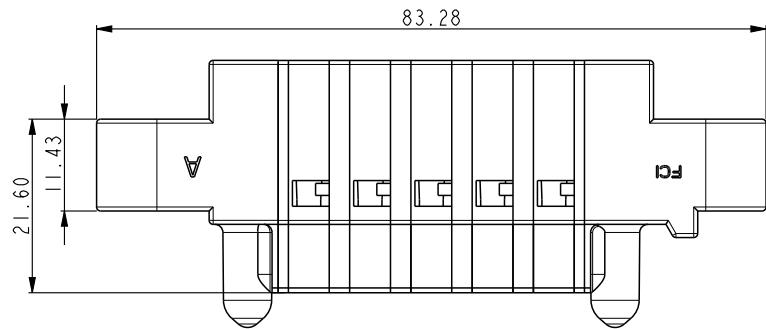


B

B

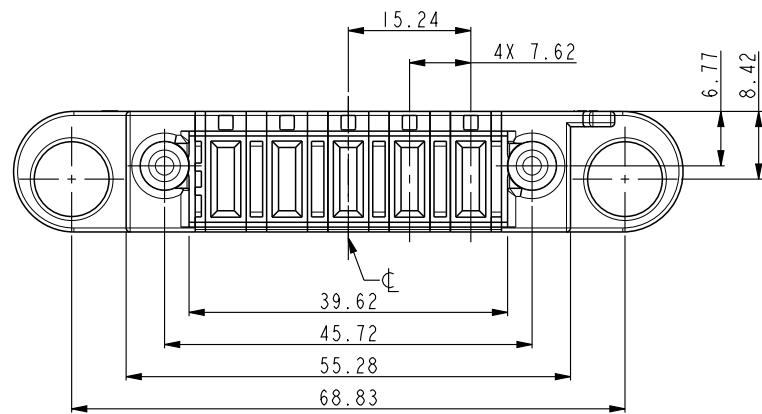

C

C

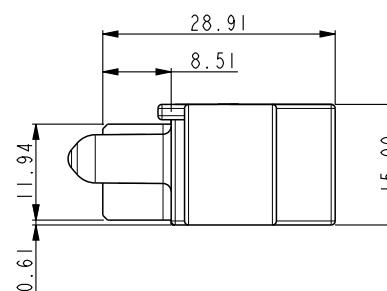

CONTACT WIRE TABLE

CONTACT PITCH	WIRE GAUGE
7.62	8-9
6.35	10-11
	12-14
5.08	12-14
2.54	22-26

CONTACT TABLE

CODE	DESCRIPTION
FM	FIRST MATE CONTACT
LM	LAST MATE CONTACT
S	SIGNAL CONTACT

REV	DESCRIPTION	ECN NO
B	MODIFY NOTES	ELX-N-21259-1

projection	size	scale
	A4	1:1
	ecn no	ELX-N-21259-1

rel level	dwg no	rev
Released	10066440-DGC0200LF	B

spec ref	*	dr	Yong Zhang	2014/10/12
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Yong Zhang	2015/06/29
		chr	-	-
		appr	Guo-Feng Jin	2015/06/30



5ACP PM

PowerBlade Cable Housing

www.fci.com



cat. no.

*

Product - Customer Drw

sheet 1 of 2

A

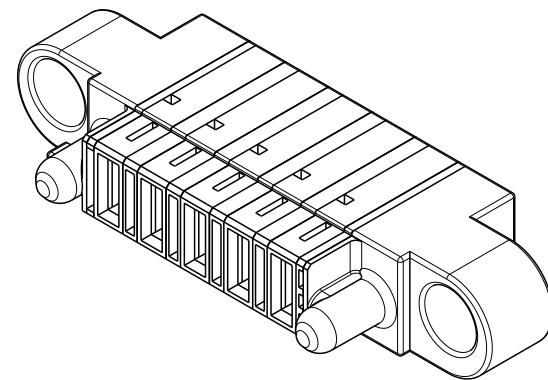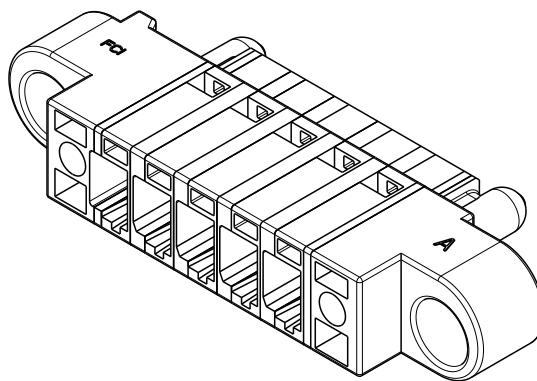

Note:

1. Material:thermo plastic,ul94 v-0
2. Bulkhead thickness range:0.79-2.54
3. Color:black
4. Applicable components
 - Applicable power crimp contact: 10132418-*****LF
 - Applicable contact secondary lock:10073097-DGC001LF
 - Applicable signal contact 76347-DGC302LF
 - Applicable latch 10066441-DGC001LF for STR version
5. Product Spec: GS-12-474
6. Application Spec: GS-20-0445
7. The part is been sold as loose piece and fci guarantees is the part in compliance with this customer drawing statement. The product spec for cable assembly can be only as the reference document because the testing and spec is based on using fci raw cable and cable asseymble. If the raw cable and cable assembly is outside suppliers sourced by cusotmers, customers or cable assembly suppliers should be fully respoonsible for the cable assy quality.

Copyright FCI.

spec ref	*		dr	Yong Zhang	2014/10/12	projection	MM	size	A4	scale
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED		eng	Yong Zhang	2015/06/29			ecn no	ELX-N-21259-1	
surface	✓	linear	chr	-	-	product family		rel level	Released	
		0.X	±0.5					dwg no	10066440-DGC0200LF	
		0.XX	±0.25			5ACP PM		rev	B	
		0.XXX	±0.10			PowerBlade Cable Housing				
		angular	0°	±°	www.fci.com	cat. no.	*	Product - Customer Drw	sheet 2 of 2	

A

B

C

D