


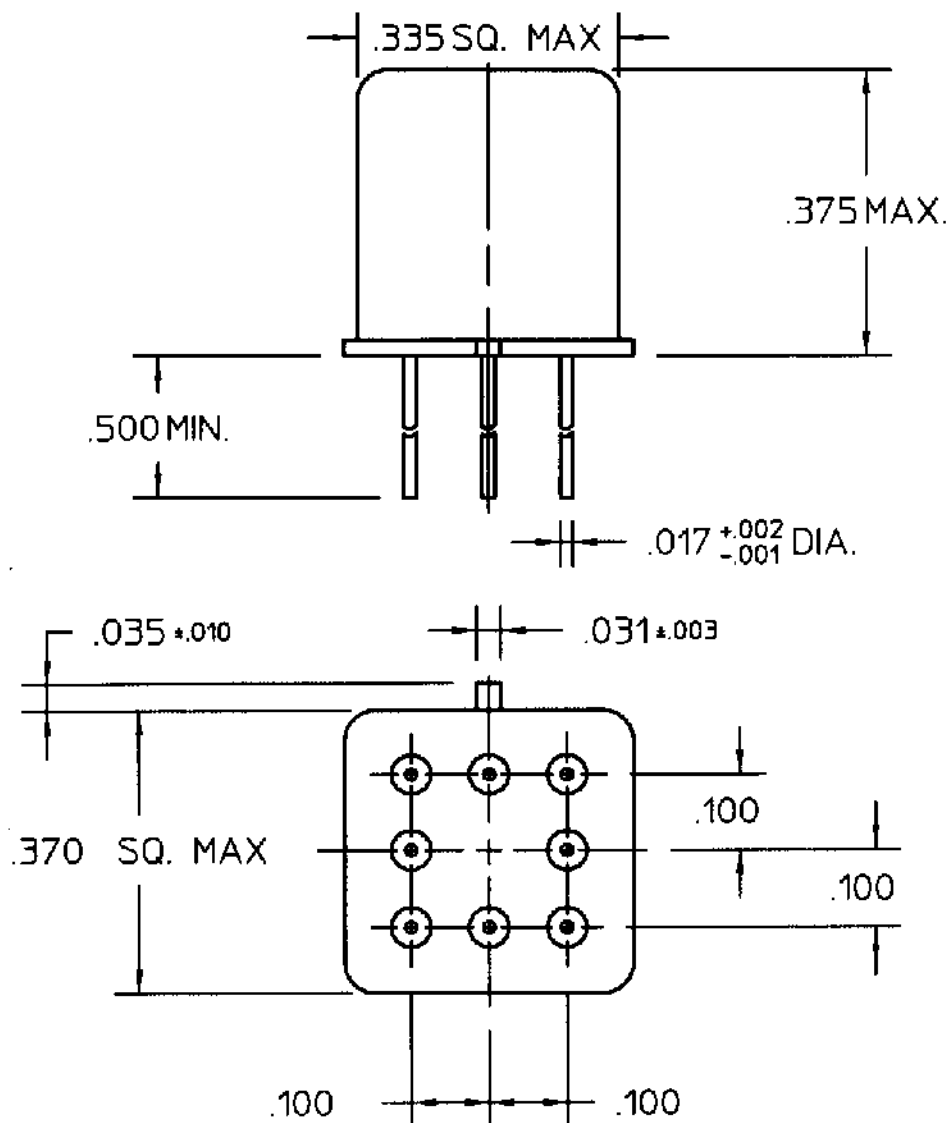

REV. 0

DCO 141888


COIL: @ 25°C
 RESISTANCE 1600 OHMS $\pm 10\%$
 NOMINAL VOLTAGE 18.0 VDC
 MUST OPERATE 10.6 VDC
 MUST RELEASE 0.9 VDC

ENVIRONMENT:

VIBRATION 10 CPS TO 3000 CPS @ 30 g's
 SHOCK 75 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +200 °C

NOTES: OPERATE TIME 4.0 MS MAX
 RELEASE TIME 2.0 MS MAX
 CONTACT BOUNCE 15 MS MAX

CUSTOMER DATA SHEET



TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 1 AMP
 28 VDC RESISTIVE 100,000 OPERATIONS
 (BASED ON TEST DATA @ +125°C)

DR. P.B.B. 3/28/00 CK. 3/28/00

COMMUNICATIONS
 INSTRUMENTS, INC.

CUST. C.I.I. STD.

CUST. NO. REV.

'MGSH' RELAY

MGSHC-18