


Audio, Daten & Signal, Socket, 3.5 mm, 3-pole, solder terminals for PCB, insulated

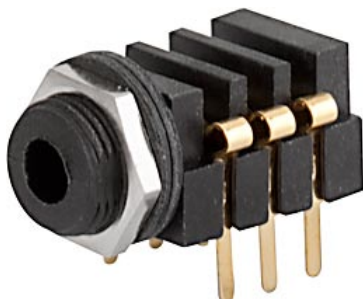

Description

- PCB Mounting:
Screw-on mounting, from rear-side
- Audio entrances and exits
- Data and Signal transfer
- Data and Signal Connectors 3-pole, insulated, straight
- Reinforced gold plating for increased insertions

References

Alternative: Housing shielded [4802.2320](#)

Weblinks


[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data


Diameter	3.5 mm
Number of Poles	3-pole
Ratings DC	1 A / 12 VDC
Ratings AC	1 A / 12 VAC
Dielectric Strength	500 VDC
Insulation Resistance	> 10000 MΩ @ 500 VDC

Allowable Operation Temp.	-20 °C to 70 °C
Terminal	PCB solder terminals
Mounting	Screw-on mounting wall thickness max. 2.0 mm
Housing	insulated
Style	straight
Lifetime	10000 Insertions

Dimensions

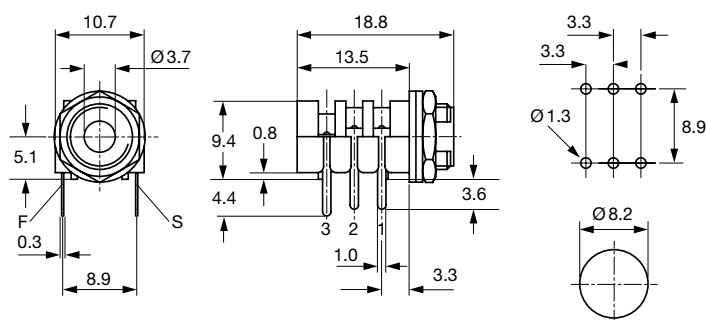

Diagrams



Variants

Product group	Diameter [mm]	Number of Poles	Terminal	Order Number
Data and Signal Plug/ Sockets	3.5	3-pole	PCB solder terminals	4802.2330

Packaging unit 100 Pcs

Mating Inlets/Plugs

Category / Description



[Data and Signal Plug/Socket Overview complete](#)

Audio, Data & Signal, Plug, 3.5 mm, 3-pole, solder terminal, shielded 4802.1300

Audio, Data & Signal, Plug, 3.5 mm, 3-pole, solder terminal, insulated 4802.1310

[Data and Signal Plug/Socket further types to 4802 UK-Stecker, D=3,5mm](#)