

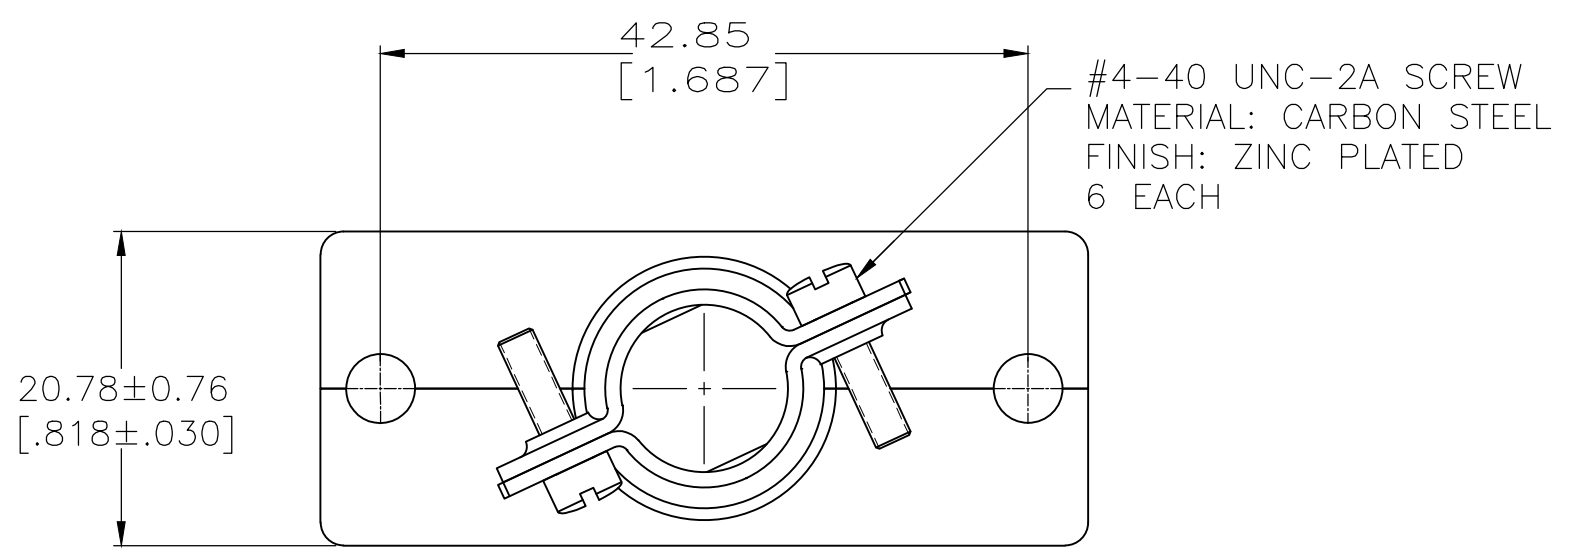


D

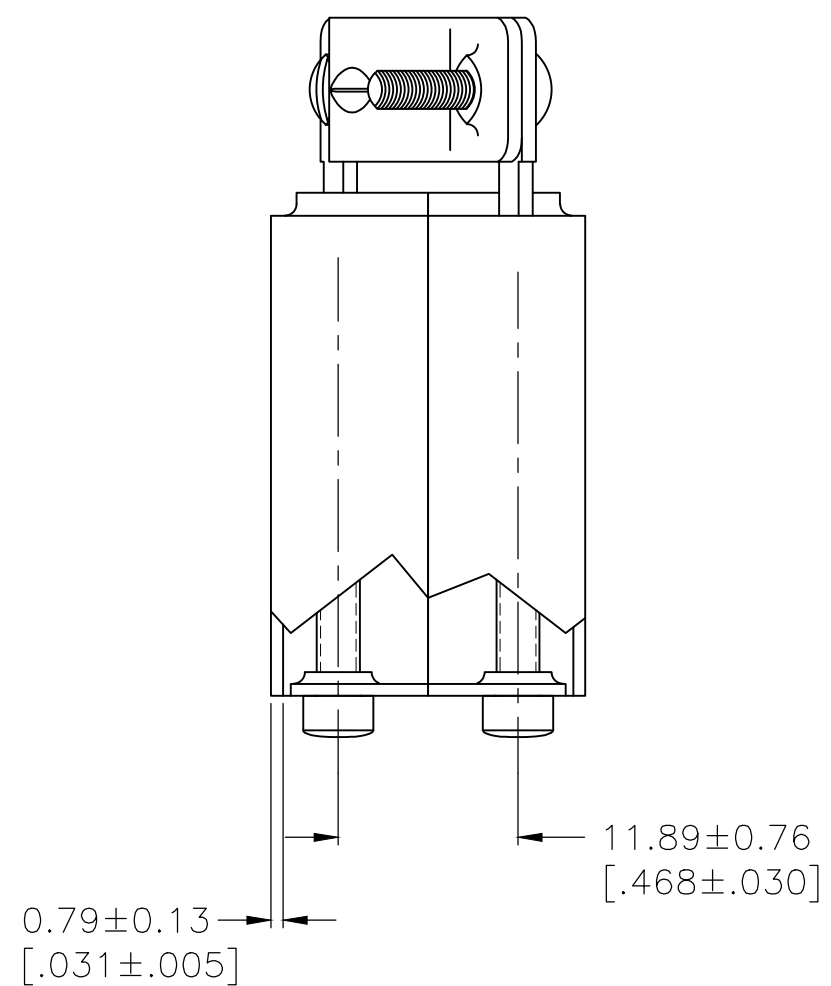

- 1 AMP, PART NUMBER AND DATE CODE, BLACK INK STAMPED OR LASER MARKED ON (1) OR BOTH SIDES.
- 2 HEXAVALENT CHROMATE COATING.
- 3 NON-HEXAVALENT CHROMATE COATING.
- 4 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

C

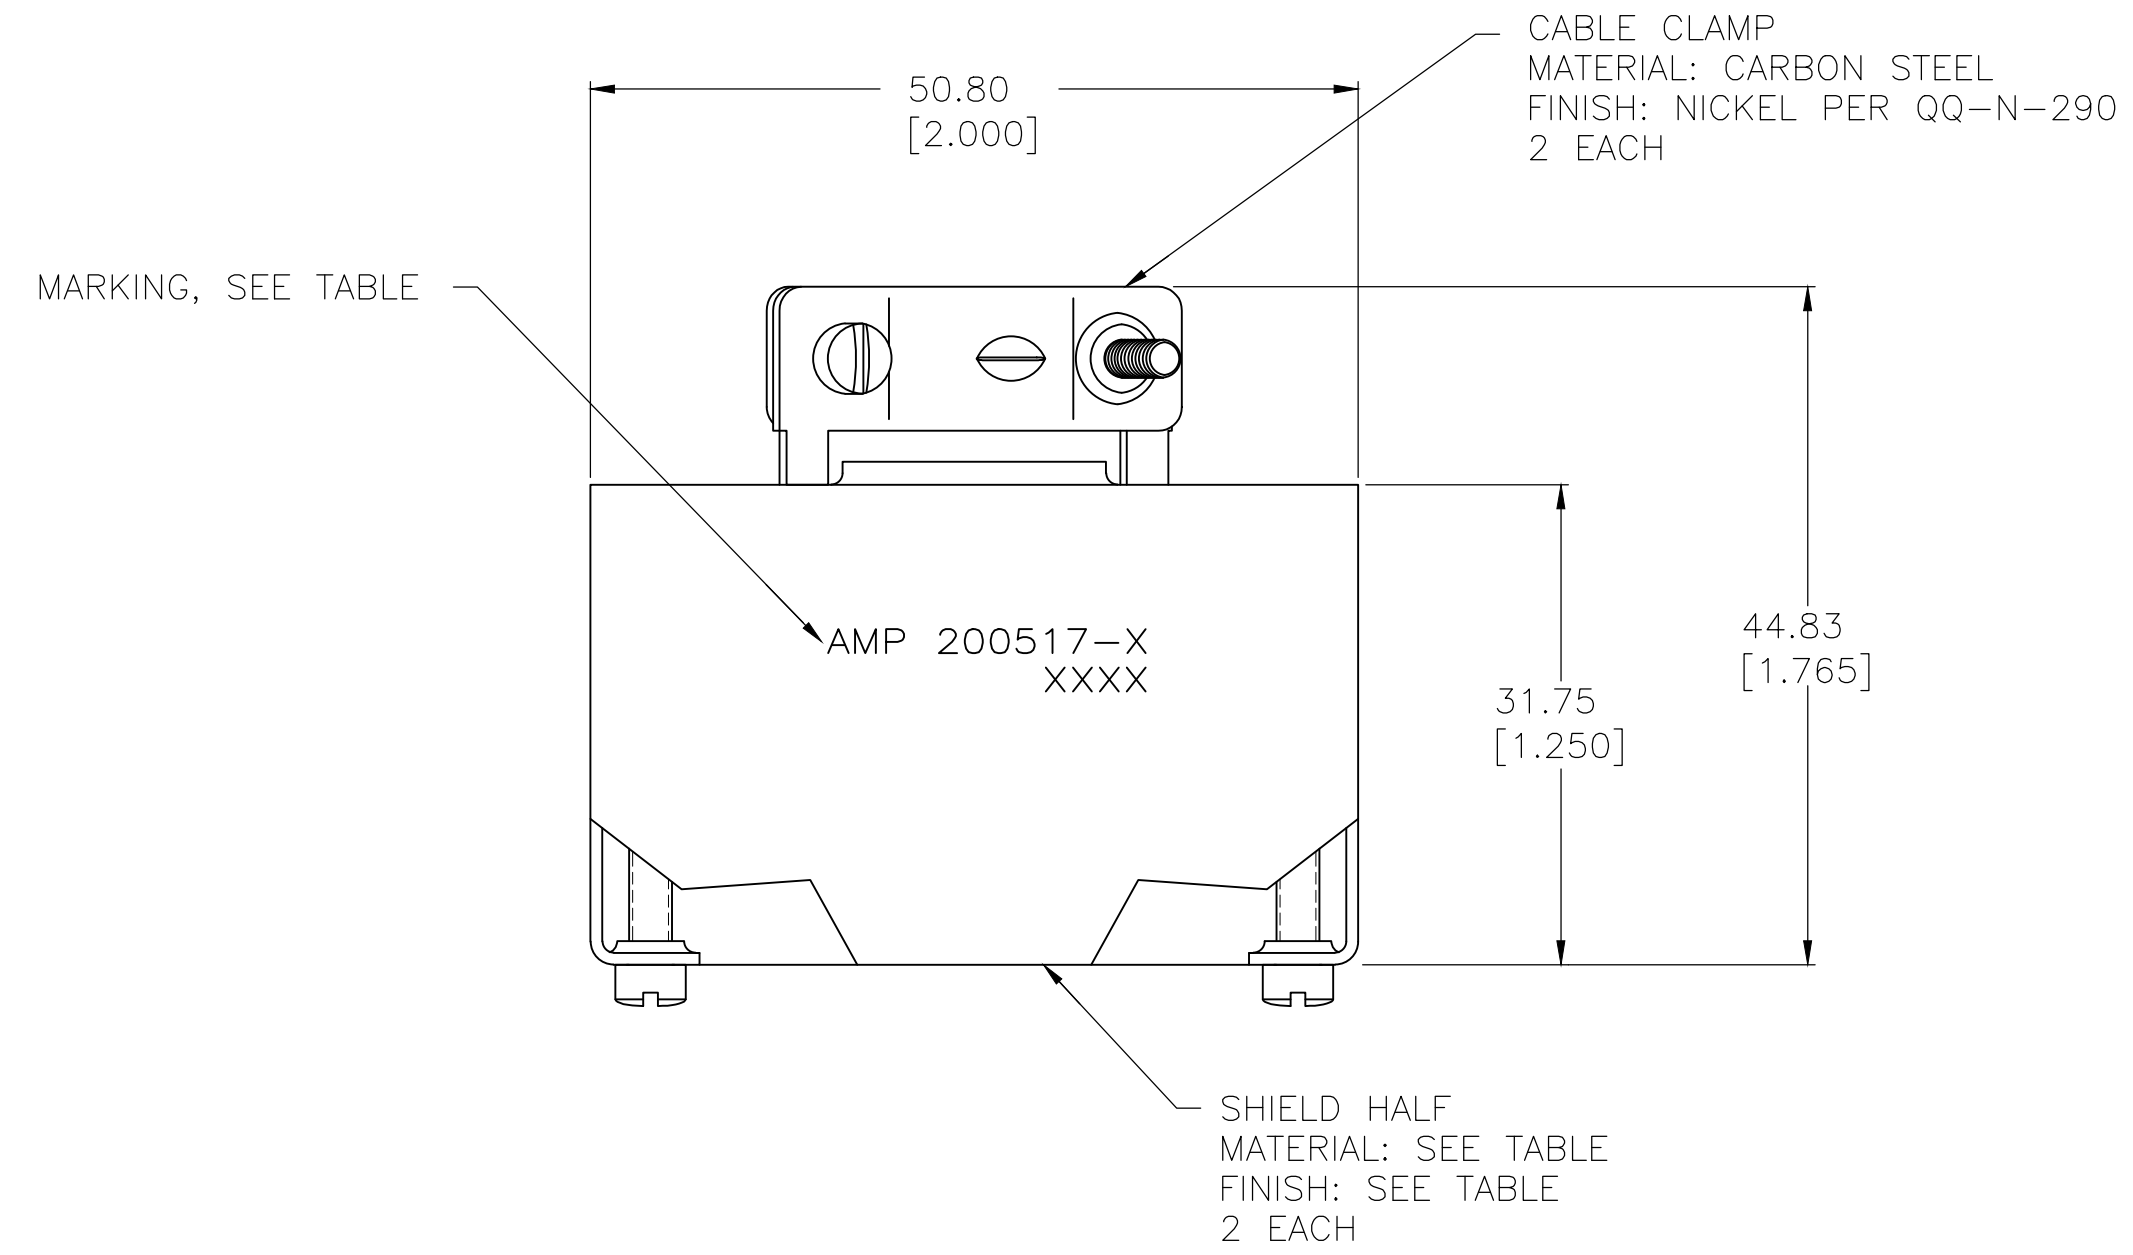

B

	3	11.05-13.84[.435-.545]	1	NICKEL PER QQ-N-290	CARBON STEEL	200517-9
4 OBSOLETE	2	7.62-11.43[.300-.450]	1	NICKEL PER QQ-N-290	CARBON STEEL	-200517-8-
4 OBSOLETE	2	11.05-13.84[.435-.545]	-	CLEAR ANODIZED	ALUMINUM ALLOY	-200517-7-
OBSOLETE	2	11.05-13.84[.435-.545]	1	NICKEL PER QQ-N-290	CARBON STEEL	-200517-2-
	2	11.05-13.84[.435-.545]	1	CLEAR ANODIZED	ALUMINUM ALLOY	200517-1
NOTES	CABLE RANGE DIA		MARKING	FINISH	MATERIAL	PART NUMBER

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
SEE CALLOUTS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± 0.38 [.015]
3 PLC	± -
4 PLC	± -
ANGLES	± -

FINISH
SEE CALLOUTS

DWN
K.FOLTZ
CHK
R.STONE
APVD
-
PRODUCT SPEC
-
APPLICATION SPEC
-
WEIGHT
0
CUSTOMER DRAWING

01/23/95
01/24/95

NAME

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=200517

RESTRICTED TO
-

SCALE
2:1

SHEET
1 OF 1

REV
AD

TE Connectivity Ltd.

SHIELD KIT, UNASSEMBLED,
SHORT, 34 POSITION, M SERIES

1471-9 (1/15)

D

C

200517

B

A