
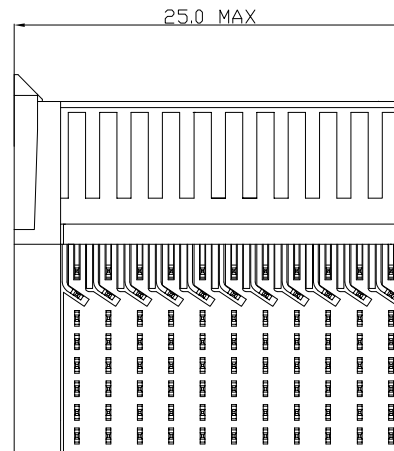
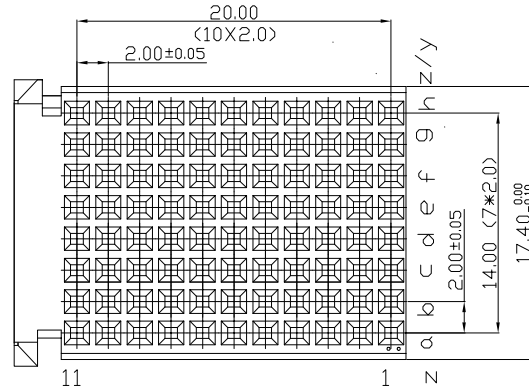
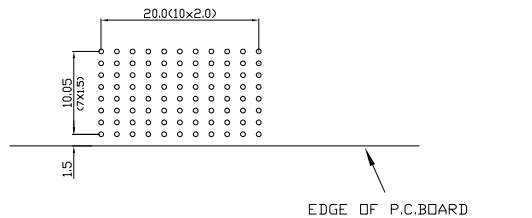


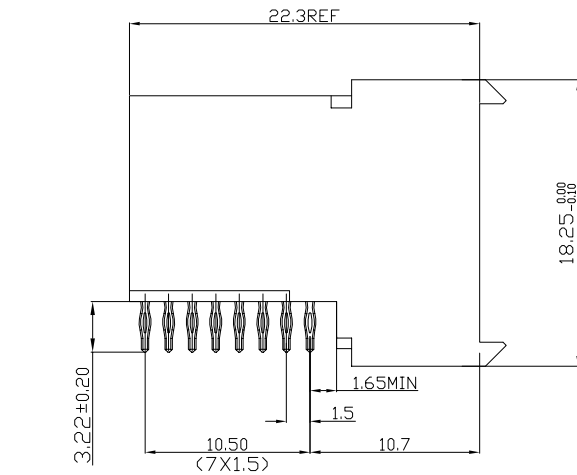

PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

NOTES 1' LEAD FREE INDICATOR (LF=LEAD FREE)
 PERFORMANCE LEVEL INDICATOR (REF. DWG NO.BSC 201844.003)

2. THIS PRODUCT IS CSA APPROVED.
THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :
BSA201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND
OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

				 www.fciconnect.com				tolerance 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN									
Dr		M.Fret		30-04-96		Product family		MILLIPICS		size		A4		Scale		3/1	
Eng						Spec ref				ECN							
Chr						Material											
Appr																	
rev	ecn no		dr	date		title MPACS 8+2R RA RCP CONN TYPE F W.O SHIELDED						dwg no		BS,C ,202258,005		Rev.	
A	CONVERSION REVISION 01		KN	14-09-01								D					
B	DG05-0381		Kason	10-10-05								CUMSTOMER		sheet 1 of 1			
C	DG07-0362		Kason	05-09-07													
D	DG10-0110		NZ	05-30-10													