

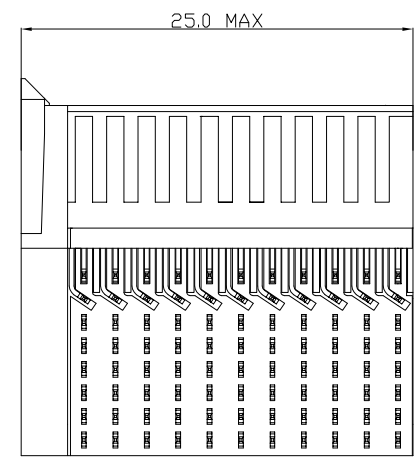
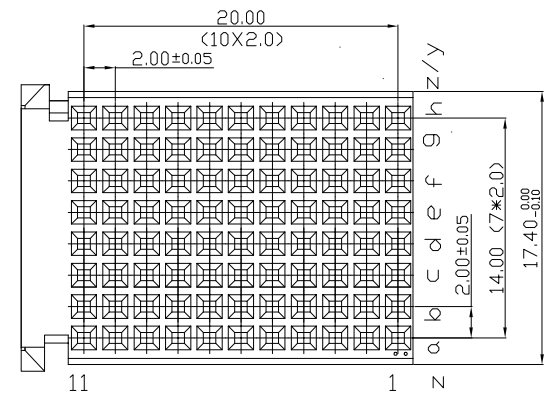


Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation ecrite du proprietaire. Propriete de c FCI. Droits de reproduction FCI.

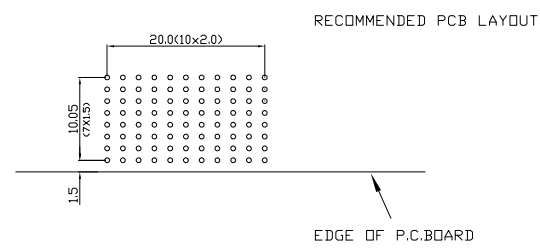

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

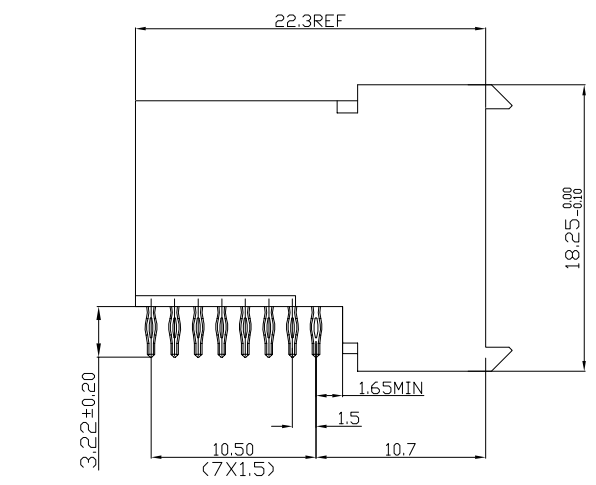

PERFORMANCE CHARACTERISTICS
CURRENT RATING 1.5A AT 20°C (FULLY LOADED)
1 A AT 70°C (FULLY LOADED)
RATED VOLTAGE : 500 V AC (CONT /CONT)
OPERATING TEMPERATURE : -55°C TO 125°C
CONTACT RESISTANCE 20 MΩ MAX
INSERTION FORCE : 0.75N MAX/CONT
EXTRACTION FORCE : 0.15N MIN/CONT
INSULATION RESISTANCE : 10⁴ MΩ MIN

- NOTES 1. LEAD FREE INDICATOR (LF=LEAD FREE)
 PERFORMANCE LEVEL INDICATOR (REF. DWG NO.BSC 201844.003)
2. THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
3. FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING : BSA201572.001
4. THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

				 www.fciconnect.com				tolerance 1DEC ±0.2 1DEC 2DEC ±0.1 2DEC ANGLES ±1° HOEKEN		 projection		 MM					
				Dr M.Fret		30-04-96		Product family MILLIPICS		size A4		Scale 3/1					
				Eng				Spec ref									
				Chr				Material		ECN							
				Appr													
				title		MPACS 8+2R RA RCP CONN TYPE F W.O SHIELDED		dwg no		BS,C ,202258,005		Rev. D					
rev		ecn no												dr		date	
A		CONVERSION REVISION 01												KN		14-09-01	
B		DG05-0381 Kason												10-10-05			
C		DG07-0362 Kason												05-09-07			
D		DG10-0110 NZ		05-30-10													