


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	02JUL2015	DL	CW

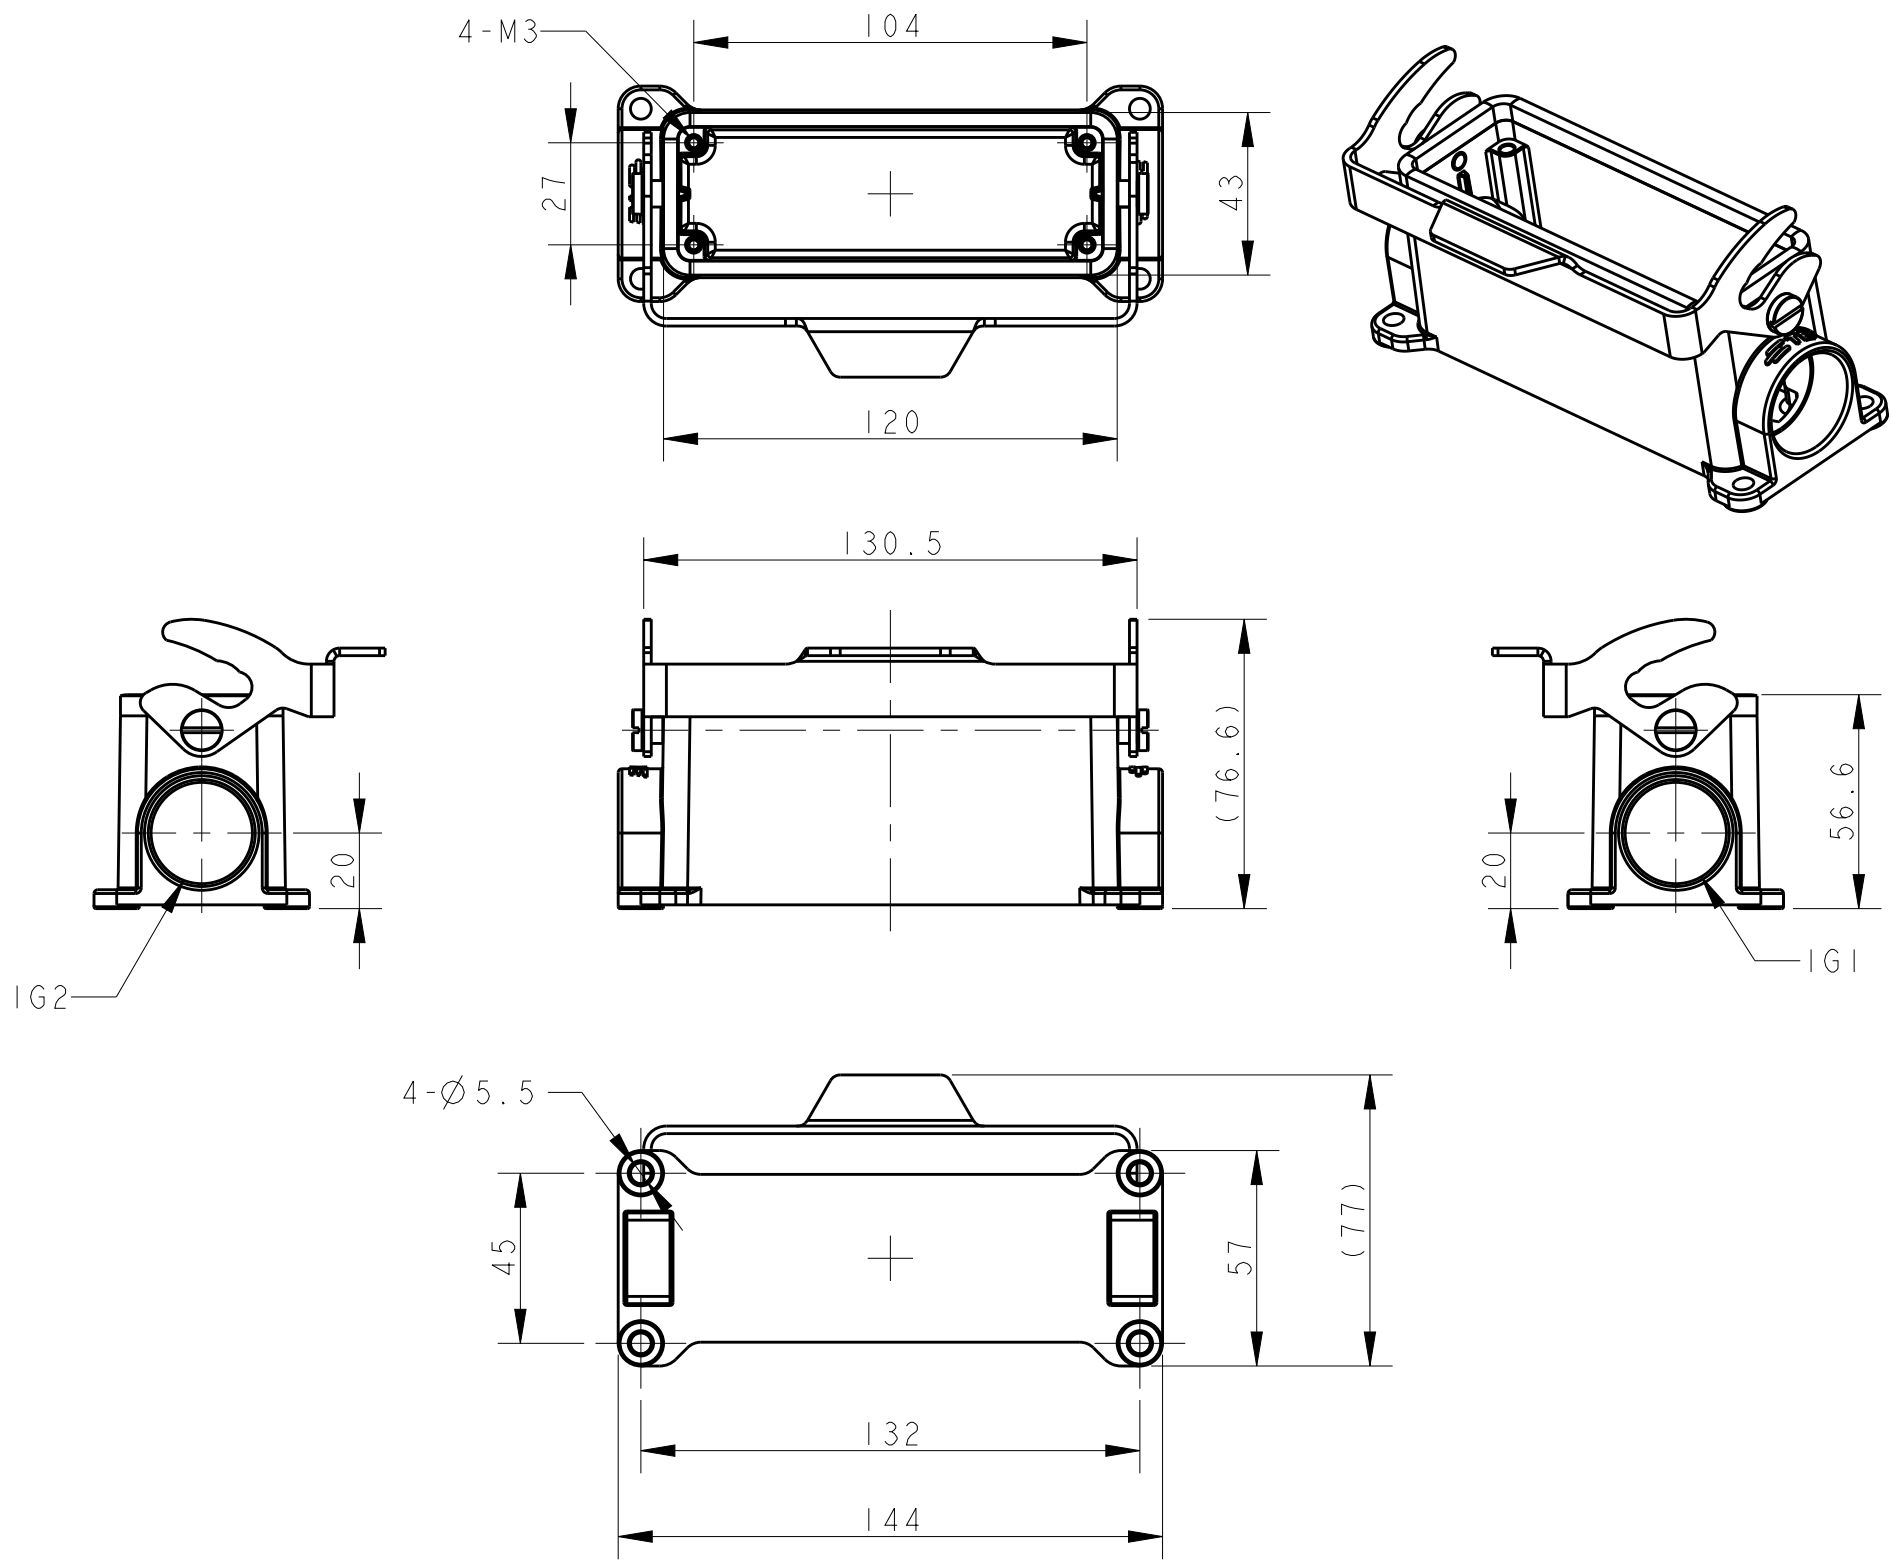


TYPE 1: BODY + SINGLE STEEL LOCKING


NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

TI610243121-000	TYPE 1	H24B-SGR-LB-PG21	PG21	-
TI610243125-000		H24B-SGR-LB-M25	M25	-
TI610243221-000		H24B-SGR-LB-2PG21	PG21	PG21
TI610243225-000		H24B-SGR-LB-2M25	M25	M25
TI620243121-000	TYPE 2	H24B-SDR-LB-PG21	PG21	-
TI620243125-000		H24B-SDR-LB-M25	M25	-
TI620243221-000		H24B-SDR-LB-2PG21	PG21	PG21
TI620243225-000		H24B-SDR-LB-2M25	M25	M25
TI620243421-000	TYPE 3	H24B-SDRM-LB-PG21	PG21	-
TI620243425-000		H24B-SDRM-LB-M25	M25	-
TI620243321-000		H24B-SDRM-LB-2PG21	PG21	PG21
TI620243325-000		H24B-SDRM-LB-2M25	M25	M25
ASSEMBLY PART NUMBER	TYPE	ASSEMBLY PART DESCRIPTION	IG1	IG2

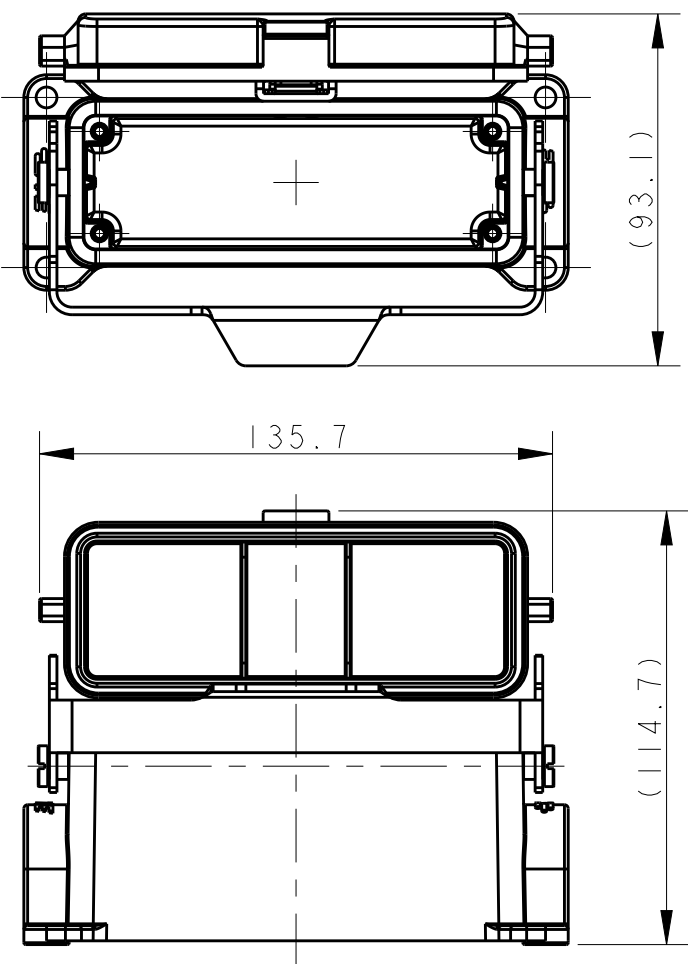


TYPE 2: BODY + SINGLE STEEL LOCKING + PLASTIC PROTECTION COVER
OTHER SPEC REFER TO TYPE 1

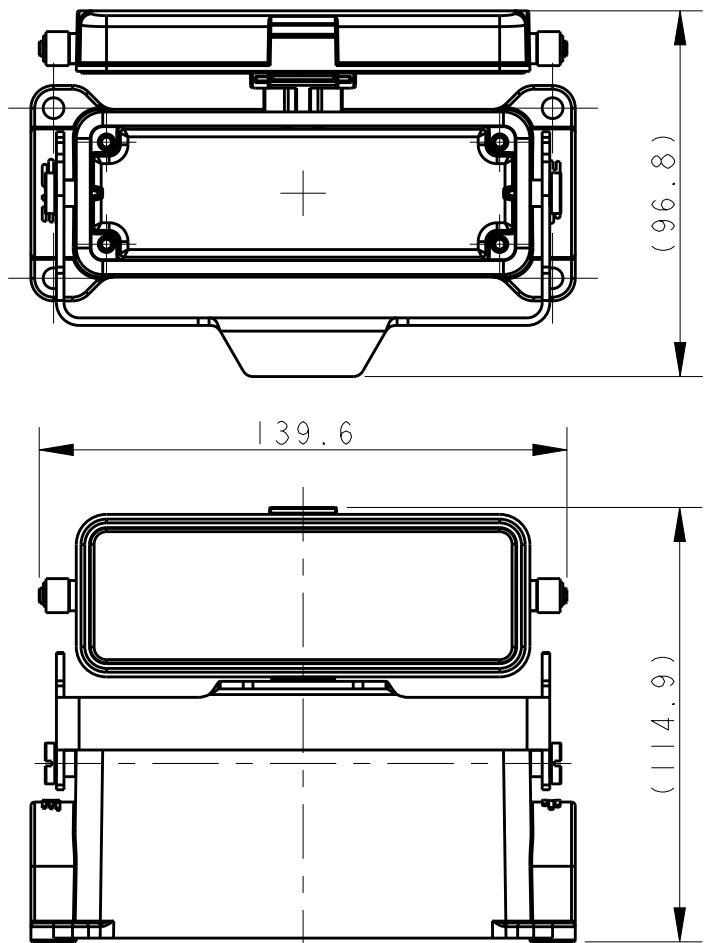


TYPE 3: BODY + SINGLE STEEL LOCKING + METAL PROTECTION COVER
OTHER SPEC REFER TO TYPE 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 02JUL2015	TE Connectivity		
		CHK CHRIS WANG 02JUL2015			
		APVD XU XIANG 02JUL2015	NAME H24B-SGR/SDR/SDRM-LB-PG/M		
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-137013		
		0 PLC ±-	APPLICATION SPEC 114-137013		
		1 PLC ±-	WEIGHT -		
		2 PLC ±-	Customer Drawing		
		3 PLC ±-	SCALE 1:2		
		4 PLC ±-	SHEET 1 OF 2		
MATERIAL TBD		ANGLES ±-	REV A		
		FINISH -			
		-			

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

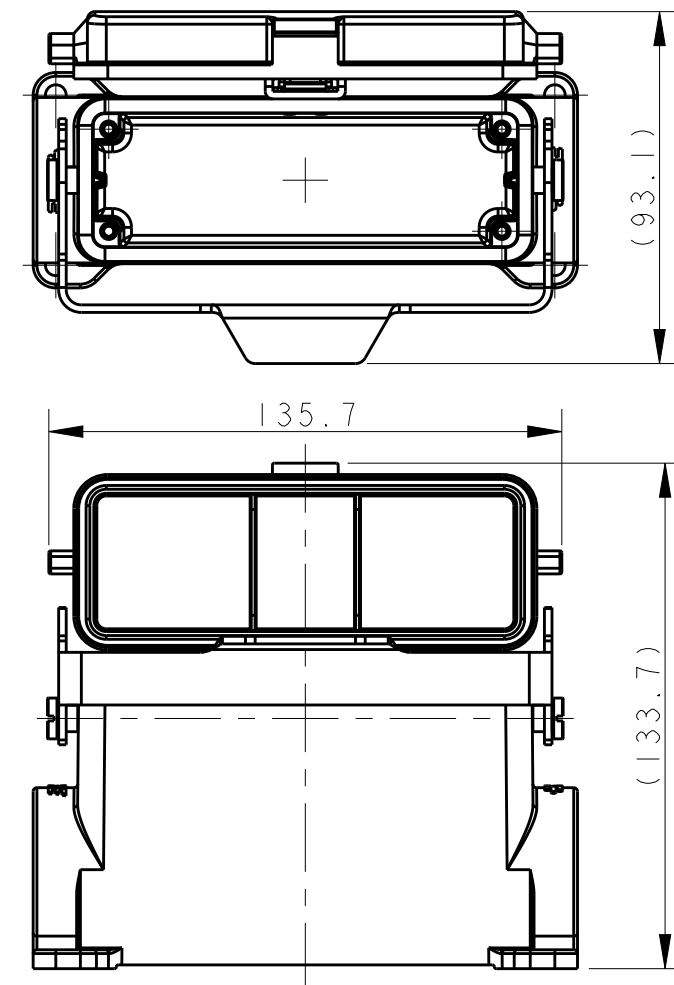

This diagram shows the front assembly of the machine. It includes the front panel (1) which has a control panel (2) mounted on top. The front panel is shown in an exploded view, indicating its position relative to the base assembly (3). The base assembly includes a large circular opening on the right side and a mounting bracket on the left.

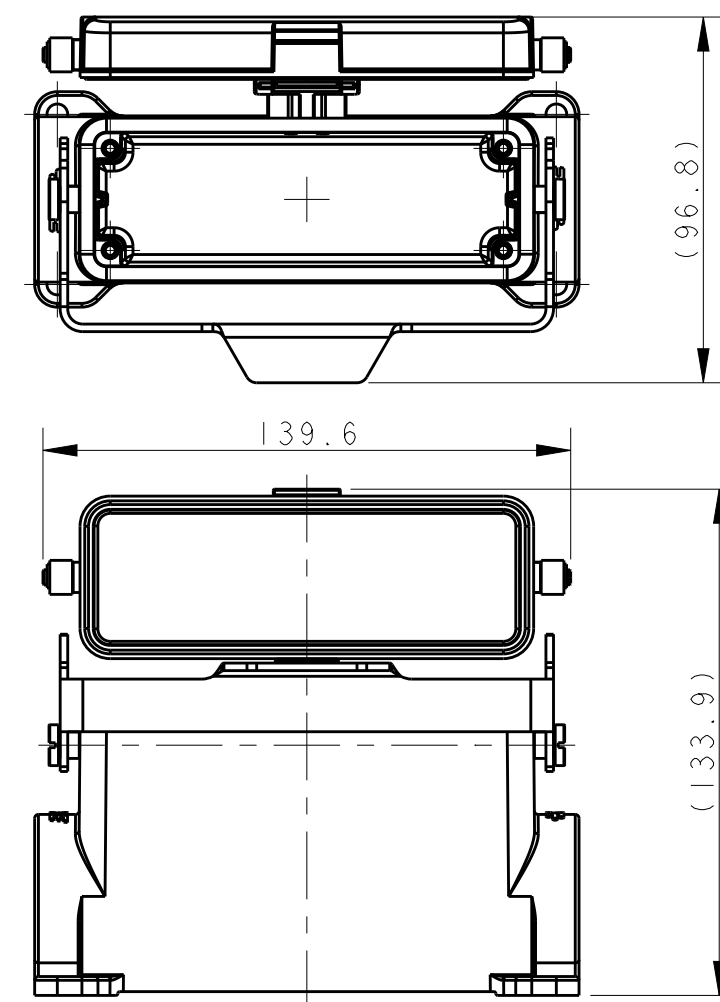

This diagram shows the front panel assembly in an exploded view. The main component is a rectangular front panel with a handle on the left and a latch on the right. Above it is a separate rectangular component, likely a light or display, which is shown being aligned with the top of the front panel. The front panel is shown being aligned with the main body of the device, which has a large circular opening on the right side.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 02JUL2015		 TE Connectivity				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		CHK CHRIS WANG 02JUL2015		NAME H24B-SGR/SDR/SDRM-LB-PG/M		
		APVD XU XIANG 02JUL2015		PRODUCT SPEC 108-137013		SIZE A2		
		APPLICATION SPEC 114-137013		CAGE CODE -		DRAWING NO C-T16X0243XXXX00		
		MATERIAL TBD -		WEIGHT -		RESTRICTED TO -		
FINISH -		Customer Drawing				SCALE 1:2	SHEET 2 of 2	REV A